
MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR,
SOCKET, CRIMP REMOVABLE, (FOR
MIL-C-81659 SERIES 2 CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the contacts described herein shall consist of this document and the latest issue of Specification MIL-C-39029.

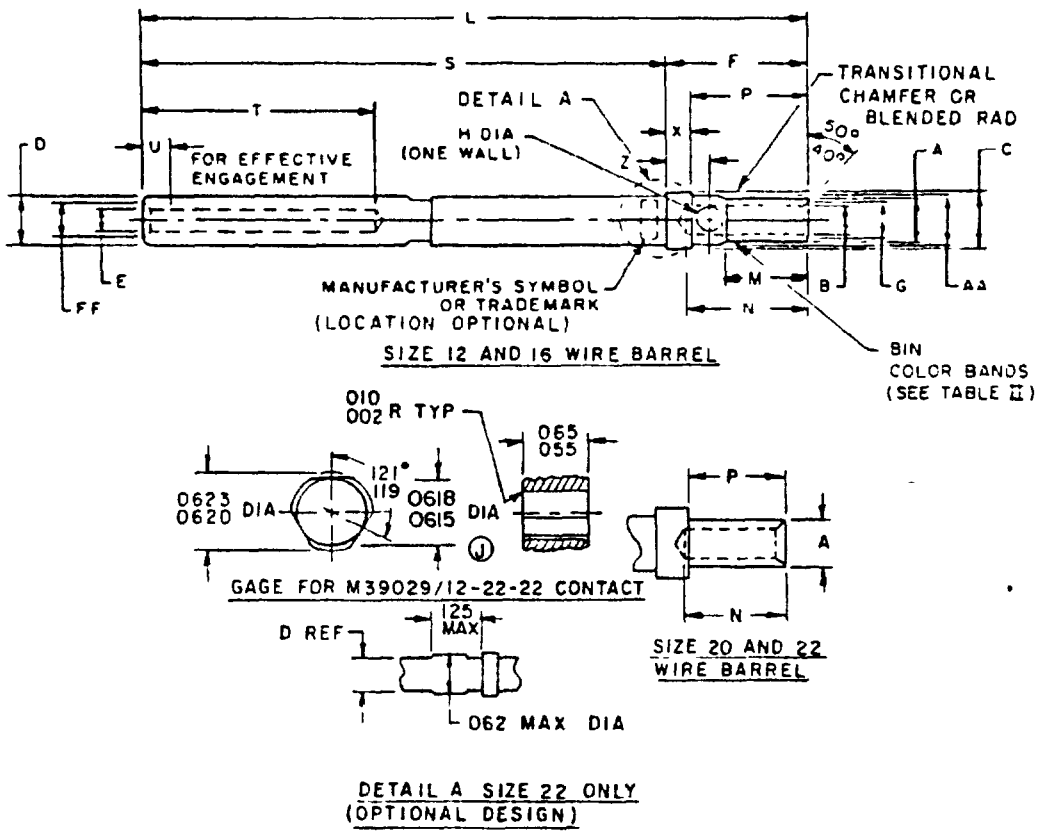

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm
3. Metric equivalents are in parentheses for overall length and diameter only.
4. Dimensions shown apply after plating.

FIGURE 1. Socket contact.

(J) denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:30Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

BIN code	A DIA	B DIA	C DIA	D DIA	E MIN DIA ONLY	F	G DIA	H DIA	L (REF)	M MIN	N	P	S	T MIN	U MAX	X	Z	AA DIA	FF MIN
148	.052	.0375	.070 (1.73)	061	031	.271	.047	.022	.650 (16 51)	N A	.165	.237	.379	.200	043	034	161	---	.043
(22-22)	.050	.0340	.068 (1.73)	059		.260	.041	.018	.630 (16.00)		.135	.231	.370			029	132		
149	.068	.0460	.084 (2.13)	.074	0415	.199	.058	.033	.918 (23.32)	N A	.190	.165	.719	.325	041	034	079	N/A	.056
(21-21)	.065	.0430	.082 (2.08)	.068		.184	.052	.025	.898 (22.81)		.150	.155	714			029	054		
150	.103	.068	.134 (3.40)	.113	061	.305	.090	.042	.982 (24.94)	.150	.290	.257	.677	.468	.060	048	083	111	.036
(13-16)	.101	.066	.130 (3.30)	110		.289	.080	.036	.952 (24 18)		.250	.245	.653			.044	069	107	
151	.151	.102	.190 (4.83)	.161	0955	.305	.140	.042	.982 (24.94)	.150	.290	.257	.677	.468	060	048	083	158	116
(12-12)	.148	.098	.186 (4.72)	.158		.289	.130	.036	.952 (24.18)		.250	.245	.653			044	069	.155	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:30Z
Check the source to verify that this is the current version before use.

TABLE II Design characteristics.

BIN code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st	2nd	3rd				
148	Brown	Yellow	Gray	22	22	A	B
149	Brown	Yellow	White	20	20		
150	Brown	Green	Black	16	16		
151	Brown	Green	Brown	12	12		

TABLE III Tools. (J)

BIN code	Basic crimping tool	Positioner	Installing tool	Removal tool
148	M22520/2-01	M22520/2-23	M81969/1-01	M81969/1-01
149	M22520/2-01 M22520/7-01	M22520/2-08 M22520/7-02	M81969/1-02	M81969/1-02
150	M22520/1-01 M22520/7-01	M22520/1-02 Blue M22520/7-03	M81969/1-03	M81969/1-03
151	M22520/1-01	M22520/1-11		M81969/28-02

REQUIREMENTS:

Dimensions, design characteristics, and configuration: See figure 1 and table I and II.

Tools: See table III.

(J) Vibration: Method 2005 of MIL-STD-1344, test condition IV.

(J) Shock (specified pulse) Method 2004 of MIL-STD-1344, test condition A.

Mating contact. MIL-C-39029/11.

Low signal level contact resistance: The mating depth shall be 0.150 inch.

Contact engagement and separation forces: For M39029/12-148, with a minimum diameter MS3197 pin, it shall be 0.5 ounce.

QPL evaluating activity Naval Avionics Center, Code D-914, Indianapolis, Indiana 46218.

International interest NEPR 57

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:30Z
Check the source to verify that this is the current version before use.

Military part number See table IV

TABLE IV. Military part number.

BIN code	Military part number	Supersedes
148	M39029/12-148	M39029/12-22-22
149	M39029/12-149	M39029/12-20-20
150	M39029/12-150	M39029/12-16-16
151	M39029/12-151	M39029/12-12-12

Custodians
Army - CR
Navy - AS
Air Force - 85

Review activities
Army - AR, MI
Navy - EC, SH, MC
Air Force - 11, 17, 99
DLA - ES

User activities
Army -
Navy - OS
Air Force -

Preparing activity
Navy - AS

Agent
DLA - ES

(Project 5935-3097-24)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:30Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-C-39029/12J Contact, Electrical Connector, Socket, Crimp Removable

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426 Replaces edition of 1 Jan 72 which may be used S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:30Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD 316

U S MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Engineering Specifications & Standards Department
Naval Air Engineering Center
Lakehurst, N J. 08733

FOLD

U S GOVERNMENT PRINTING OFFICE 1980—603-121/2401 2-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:30Z
Check the source to verify that this is the current version before use.