
MILITARY SPECIFICATION SHEET

CONTACTS ELECTRICAL CONNECTOR, SOCKET, CRIMP REMOVABLE, (FOR MIL-C-81511 SERIES 3 CONNECTORS)


This specification is approved for use by Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the contacts described herein shall consist of this document and the latest issue of Specification MIL-C-39029.

INACTIVE FOR NEW DESIGN

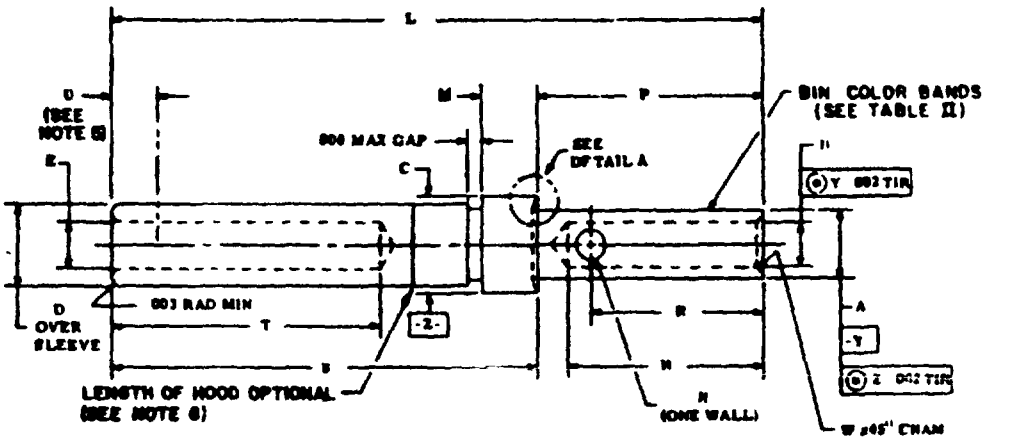

SIZE 12, 16 AND 20 WIRE BARREL

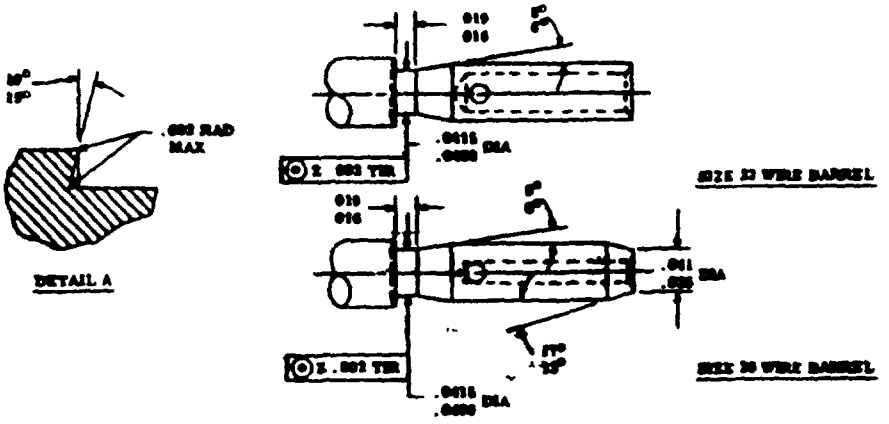

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Metric equivalents are in parentheses for overall length and diameter only.
4. Dimensions shown apply after plating.
5. Point of initial engagement
6. Maximum cap of .010 inch between hood and body of the contact.

FSC 5935

© denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:31Z
Check the source to verify that this is the current version before use.

TABLE I Dimensions.

BIN code	A DIA	B DIA	C DIA	D MAX DIA	E MIN DIA ONLY	H DIA	L (REF)	M	N	P	R	S	T	U MAX	W CHAM
171	.0480	.0200	.0555 (1.41)	.055	028	022	937 (23 80)	445	.155	.218	.145	.726	.250	.038	.006
	.0465	.0180	.0540 (1.37)			018		.425	.145	.208	.139	.712	.190		.003
172	.0480	.0355	.0555 (1.41)	.055	.028	022	937 (23 80)	.445	.155	.218	.145	.726	.250	.038	.006
	.0465	.0335	.0540 (1.37)			.018		.425	.145	.208	.139	.712	.190		.003
173	.0615	.0450	.0760 (1.93)	.076	0415	027	937 (23 80)	.395	.195	.218	.165	.726	.360	.045	.007
	.0600	.0430	.0745 (1.89)			023		.375	.185	.208	.159	.712	.270		.004
174	.0925	.0645	.1080 (2.74)	.108	064	027	.937 (23 80)	.370	.195	.218	.165	.726	.360	.050	.010
	.0910	.0625	.1065 (2.71)			023		.350	.185	.208	.159	.712	.270		.006
175	.1515	.1020	.1695 (4.31)	.169	.0955	042	954 (24.23)	.370	.232	.245	.196	.716	.360	.050	012
	.1500	.0980	.1680 (4.27)			038		.350	.216	.235	.190	.712	.250		006

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:31Z
Check the source to verify that this is the current version before use.

TABLE II. Design characteristics.

BIN code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st	2nd	3rd				
171	Brown	Violet	Brown	23	28	A	B
172	Brown	Violet	Red	23	22		
173	Brown	Violet	Orange	20	20		
174	Brown	Violet	Yellow	16	16		
175	Brown	Violet	Green	12	12		

TABLE III. Tools.

BIN code	Basic crimping tool	Positioner	Installing tool	Removal tool	
				Wired contact	Unwired contact
171	M22520/2-01	M22520/2-16	M81969/16-04	M81969/16-04	M81969/30-01
172	M22520/2-01	M22520/2-16	M81969/16-04	M81969/16-04	M81969/30-01
173	M22520/2-01 M22520/7-01	M22520/2-17 M22520/7-02	M81969/16-01	M81969/16-01	M81969/30-02
174	M22520/2-01 M22520/7-01	M22520/2-18 M22520/7-03	M81969/16-02	M81969/16-02	M81969/30-03
175	M22520/1-01	M22520/1-10	M81969/16-03	M81969/16-03	M81969/30-04

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions, design characteristics, and configuration See figure and tables I and II.

Tools See table III

(C) Vibration Method 2005 of MIL-STD-1344, test condition IV

(C) Shock (specified pulse) Method 2004 of MIL-STD-1344, test condition A

Mating contact MIL-C-39029/18.

QPL evaluating activity. Naval Avionics Center, Code D-914, Indianapolis, Indiana 46218

Military part numbers See table IV.

(C) TABLE IV Military part number

BIN code	Military part number	Supersedes
171	M39029/17-171	M39029/17-23-28
172	M39029/17-172	M39029/17-23-22
173	M39029/17-173	M39029/17-20-20
174	M39029/17-174	M39029/17-16-16
175	M39029/17-175	M39029/17-12-12

Custodians
Navy - AS

Review activities
Navy - EC, SH, MC
DLA - ES

User activities
Navy - OS

Preparing activity
Navy - AS

Agent
DLA - ES

(Project 5935-N109-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:31Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Engineering Specifications & Standards Department
Naval Air Engineering Center
Lakehurst, N.J 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:31Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-C39029/17C Contact, Electrical Connector, Socket, Crimp Removable

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID RESTRICTIVE LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1426 OCT 6

Replaces edition of 1 Jan 72 which may be used

S/N 0102 LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:31Z
Check the source to verify that this is the current version before use.