
MIL-C-39029/22A(AS)
2 August 1976
SUPERSEDING
MIL-C-39029/22
28 September 1973
MIL-C-39029/15A(NAVY)
(IN PART, See table VIII)
3 August 1973

MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL, CONNECTOR,
SOCKET, CRIMP REMOVABLE, (FOR COMMON TERMINAL
SYSTEM CTS AND MIL-C-81511 SERIES 3 AND 4 CLASS L CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the contacts described herein shall consist of this document and the latest issue of Specification MIL-C-39029.

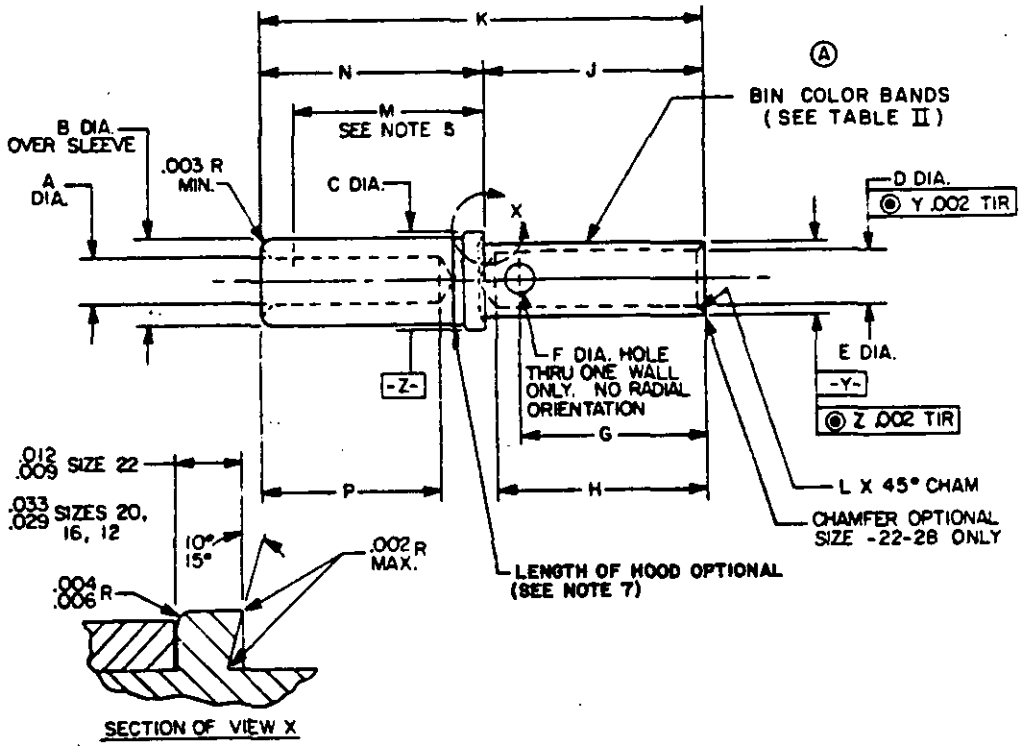

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Metric equivalents are in parentheses for overall length and diameter only.
4. Dimensions shown apply after plating.
5. Distance between rear of contact shoulder and point at which a gage pin, of same basic diameter as mating pin contact and a square face, first engages socket contact spring member.
6. Axial concentricity: All diameters to be concentric within .004 TIR except as noted.
7. Maximum cap of .010 inch between hood and body of the contact.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:32Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

BIN code	A DIA	B MAX DIA	C DIA	D DIA	E DIA	F DIA	G	H	J	K REF	L CHAM	M MIN	N	P
190	.033 .031	.060	.0615 (1.56) .0600 (1.52)	.0200 .0180	.0480 .0465	.022 .018	.145 .139	.175 .160	.170 .160	.327 (8.31)	.006 .003	.130	.166 .158	.137 .120
191	.033 .031	.060	.0615 (1.56) .0600 (1.52)	.0355 .0335	.0480 .0465	.022 .018	.145 .139	.175 .160	.170 .160	.327 (8.31)	.006 .003	.130	.166 .158	.137 .120
192	.044 .042	.076	.094 (2.39) .091 (2.31)	.048 .046	.070 .068	.027 .023	.145 .139	.175 .160	.170 .160	.349 (8.86)	.010 .005	.150	.188 .180	.137 .120
193	.066 .064	.108	.130 (3.30) .127 (3.23)	.068 .066	.103 .101	.027 .023	.145 .139	.175 .160	.170 .160	.349 (8.86)	.010 .005	.150	.188 .180	.137 .120

For size 12 contacts use M39029/59-358.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:32Z
Check the source to verify that this is the current version before use.

TABLE II. Design characteristics.

BIN code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st	2nd	3rd				
190	Brown	White	Black	22	28	A	B
191	Brown	White	Brown	22	22		
192	Brown	White	Red	20	20		
193	Brown	White	Orange	16	16		

1/ For size 12 contacts use MS27492-12 (MIL-C-39029/57, BIN code 359).
2/ 190 for internal black box wiring and shall not be used in airframe wiring.

TABLE III. Tools.

BIN code	Basic crimping tool	Positioner	Installing and removal tool
190	M22520/7-01	M22520/7-11	M81969/16-04
191	M22520/7-01	M22520/7-11	- - -
192	M22520/7-01	M22520/7-12	M81969/16-01
193	M22520/7-01	M22520/7-13	M81969/16-02

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:32Z
Check the source to verify that this is the current version before use.

9 Aug 1976

REQUIREMENTS:

Dimensions, design characteristics, and configuration: See figure and tables I and II.

Tools: See table III.

Intended use: These contacts are for use in components designed to MIL-STD-1549. In addition, these contacts replace MIL-C-39029/15 size 22-28 and size 22-22 for use with MIL-C-81511 series 3 and 4 class L.

Contact resistance: When mated to .100 depth with type A pin contacts of specified mating diameters, the contact resistance shall be as specified in table IV.

TABLE IV. Contact resistance.

Engaging end size	Wire size (AWG)	Test current (amperes)	Maximum voltage drop (millivolts)		
			25° ±3°C	25° ±3°C After conditioning	200° $^{+3°}_{-0°}$C
22	28	1.5	60	70	100
	32	1.0	95	105	135
22	22	5.0	70	80	120
	26	2.0	60	70	100
20	20	7.5	55	65	95
	24	3.0	45	55	80
16	16	13.0	50	60	85
	20	7.5	45	55	80

Contact engagement and separation force: Test pin diameters shall be as specified in table V.

TABLE V. Contact engagement and separation force.

Socket engaging end size	Test pin diameter	
	Min $^{+.0001}_{-.0000}$	Max $^{+.0000}_{-.0001}$
22	.0295	.0305
20	.0395	.0405
16	.0615	.0625

Probe damage: Test probe diameters, depths of insertion and bending moments shall be as specified in table VI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:32Z
Check the source to verify that this is the current version before use.

TABLE VI. Probe damage.

Socket engaging end size	Test probe diameter	Bending moment	
		Depth of insertion	Moment (Max in-lb)
22	.0305 .0295	.105 .095	.10
20	.0405 .0395	.135 .125	.25
16	.0625 .0615	.135 .125	.37

Tensile strength: As specified in table VII.

TABLE VII. Tensile strength.

Wire barrel size	Wire size (AWG)	Axial load (pounds)		Maximum permissible crimp barrel growth per dia
		Silver- or tin-plated copper wire	Nickel-plated copper wire	
28	28 32	2.7 1.0	1.7 1.0	.0015
22	22 26	12.0 5.0	8.0 3.0	
20	20 24	20.0 8.0	10.0 6.0	.0030
16	16 20	50.0 20.0	29.0 10.0	.0050

QPL evaluating activity: Naval Weapons Support Center, Code 3074, Crane, Indiana 47522.

Military part numbers: See table VIII.

TABLE VIII. Military part number.

Bin code	Military part number	Supersedes
190	M39029/22-22-28	M39029/15-22-28
191	M39029/22-22-22	M39029/15-22-22
192	M39029/22-20-20	- - -
193	M39029/22-16-16	- - -

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:32Z
Check the source to verify that this is the current version before use.

Custodians:
Navy - AS

Review activities:
Navy - EC, SH, MC
DSA - ES

User activities:
Navy - OS

Preparing activity:
Navy - AS

Agent:
DSA - ES

(Project 5935-N041-9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT-IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:32Z
Check the source to verify that this is the current version before use.