
MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTORS, SOCKET, CRIMP REMOVABLE, SHIELDED, (FOR MIL-C-26482 SERIES 1 CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the contacts described herein shall consist of this document and the latest issue of Specification MIL-C-39029.

INACTIVE FOR NEW DESIGN

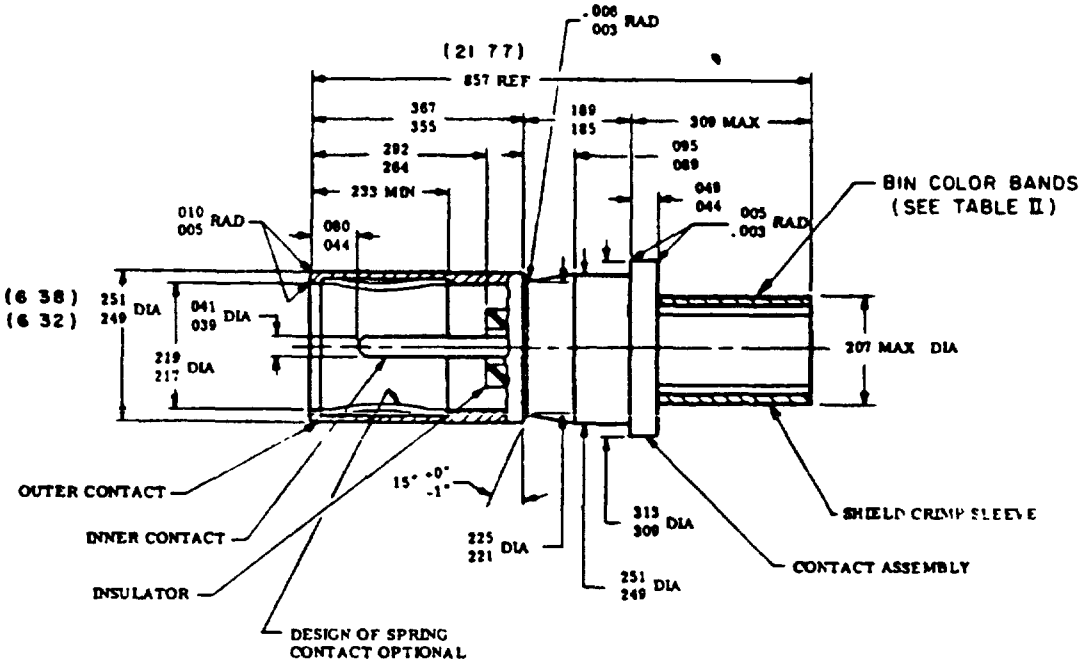

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.003	.08	068	1 73	110	2.79	.225	5.72
004	.10	078	1 98	116	2.95	.233	5.92
.005	.13	.080	2 03	.132	3.35	.249	6.32
006	.15	089	2 26	170	4.32	.251	6.38
.0063	160	.090	2.29	185	4 70	.264	6.71
.0067	170	095	2 41	189	4.80	.292	7 42
0079	.201	.096	2 44	195	4.95	309	7.85
.010	25	100	2 54	.207	5 26	.313	7.95
.041	1.04	.103	2.62	.217	5.51	.355	9.02
.044	1 12	.105	2 67	.219	5 56	.367	9 32
.049	1.24	106	2.69	.222	5.64	.857	21 77

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25 4 mm
3. Metric equivalents are in parentheses for overall length and diameter only
4. Dimensions shown apply after plating

FIGURE 1 Connector contact

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration. See figure 1 and tables I and II.
Mating contact: See table I.
Assembly procedure: See figure 2. Manufacturer's recommended assembly instructions shall be shipped with unit package.

Vibration: Method 2005 of MIL-STD-1344, test condition IV.

Shock (specified pulse) Method 2004 of MIL-STD-1344, test condition A.

Part number See table III.

International interest: NEPR57.

QPL evaluating activity: Naval Avionics Center, Code D-914, Indianapolis, Indiana 46218

Revision letters are not used to denote changes due to the extensiveness of the changes.

TABLE I. Reference data.

BIN code	Cable data					Mating contact M39029/23-
	Cable accommodated	O.D. of jacket	Number of shields	Dielectric O.D.	Inner conductor size	
199	M17/028-RG058 M17/111-RG303	.195 .170	1 1	.116 .116	No 20 AWG Silverplated 1/.039	194
200	M17/119-RG174	.100	1	.060	No. 26 AWG 7/.0067	195
	M17/094-RG179	.105	1	.063	No. 30 AWG 7/.004	
	M17/113-RG316	.110 max	1	.060	No. 26 AWG 7/.0067	
201	M17/095-RG180	.141	1	.103	No. 30 AWG 7/.004	196
202	Raychem No. 28-403 1/	.132 max	2	.082 .090	No. 22 AWG 19/.0063	197
203	No. 22 shielded MIL-C-27500	096	1	.068	No. 22 AWG 19/.0063	198
	No. 20 shielded MIL-C-27500	.106	1	.078	No. 20 AWG 19/.0079	

1/ Or equivalent.

TABLE II. Design characteristics.

BIN code	Color bands			Contact cavity size	Type	Class
	1st	2nd	3rd			
199	Brown	White	White	8	D	A
200	Red	Black	Black	8		
201	Red	Black	Brown	8		
202	Red	Black	Red	8		
203	Red	Black	Orange	8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:32Z
Check the source to verify that this is the current version before use.

TABLE III. Part number.

BIN code	Part number	Supersedes
199	M39029/24-199	M39029/24-01
200	M39029/24-200	M39029/24-02
201	M39029/24-201	M39029/24-03
202	M39029/24-202	M39029/24-04
203	M39029/24-203	M39029/24-05

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities
Army - MU, MI
Navy - EC, SH, MC
Air Force - 11, 17, 99
DLA - ES

User activities
Army -
Navy - OS
Air Force -

Preparing activity
Navy - AS

Agent.
DLA - ES

(Project 5935-3098-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:32Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Specifications & Standards Department
Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corr and send to preparing activity Attach any pertinent data which may be of use in improving this document. there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-C-39029/24B Contact, Electrical Connector, Socket, Crimp Removable, Shielded

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426 Replaces edition of 1 Jan 72 which may be used S/N 0102-LF-001-42(

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:32Z
Check the source to verify that this is the current version before use.