MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR PIN, CRIMP REMOVABLE, SHIELDED, (FOR MIL-C-26482 SERIES 1 CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the contacts described herein shall consist of this document and the latest issue of Specification MIL-C-39029.

INACTIVE FOR NEW DESIGN

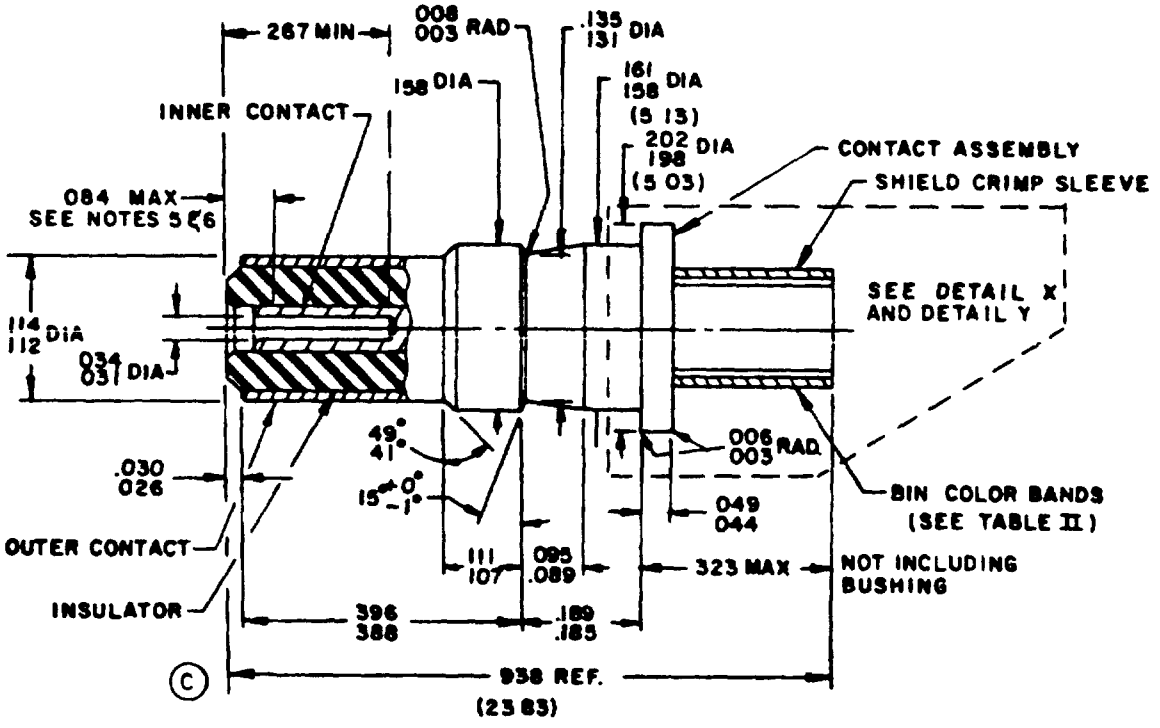


FIGURE 1. Connector contact.

Ⓒ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 202640-21T18:33Z
Check the source to verify that this is the current version before use.

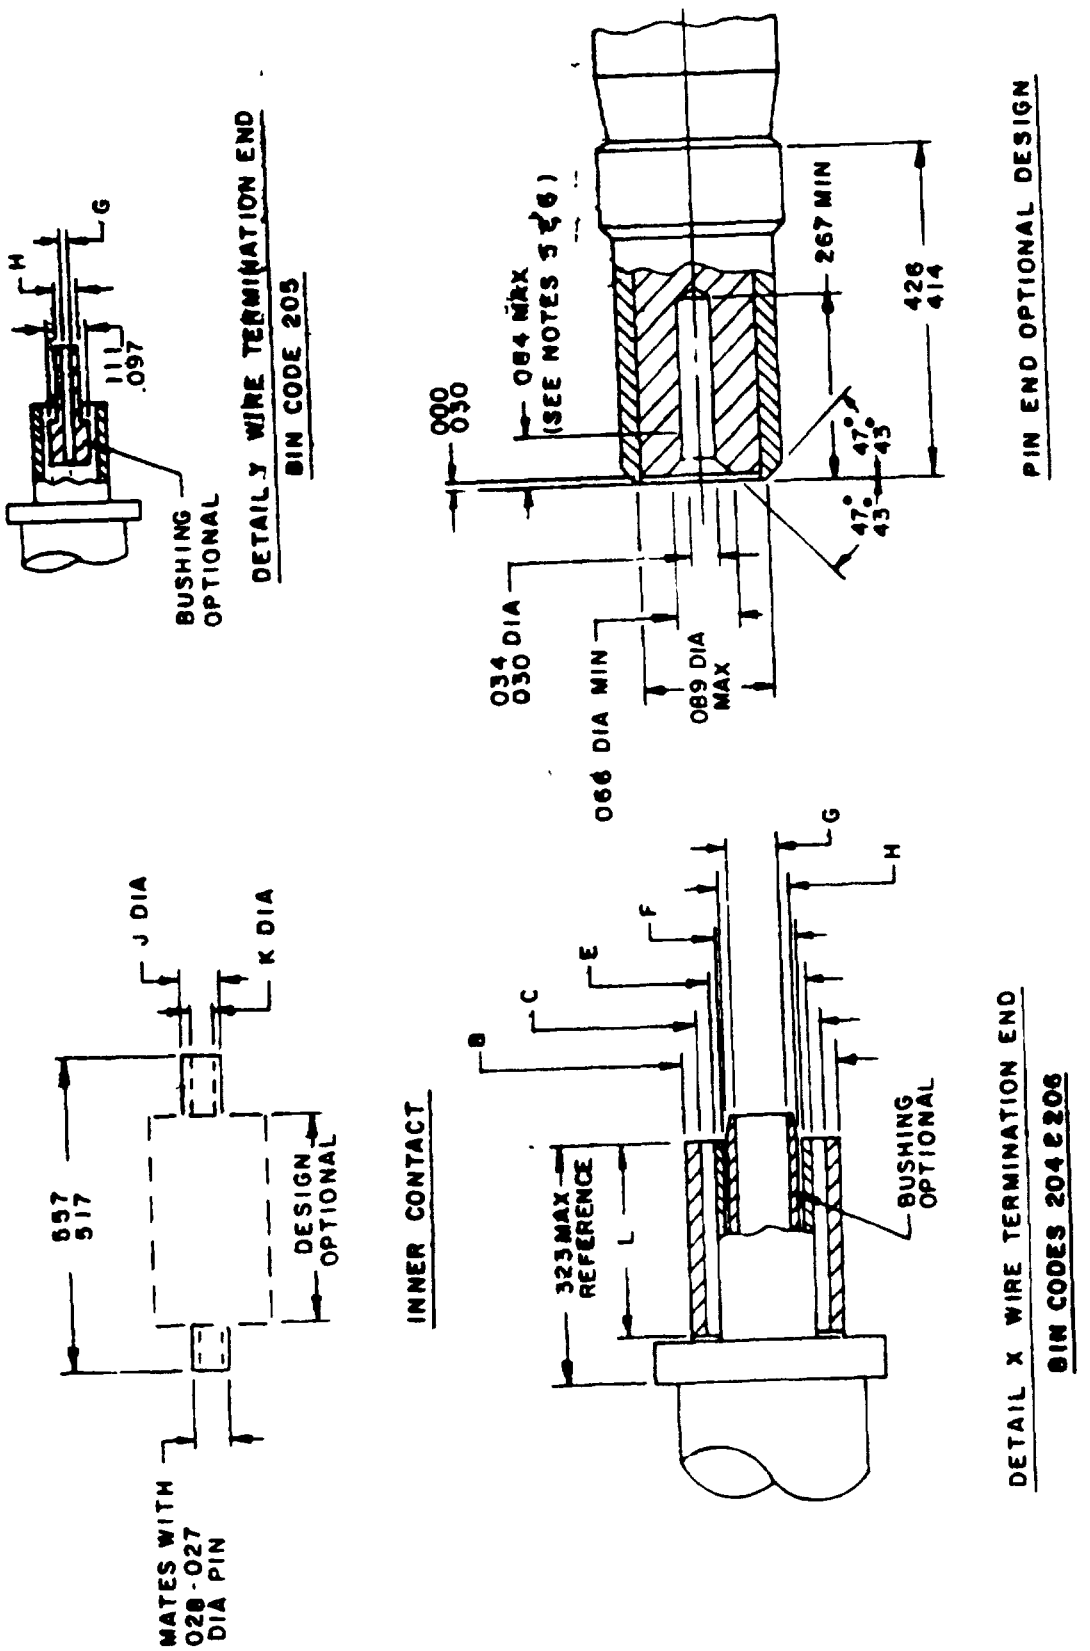


FIGURE 1. Connector contact. -Continued

Source: https://assist.dla.mil -- Downloaded: 202610-21T18:33Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions

BIN code	B	C	E	F	G	H	J	K	L
204	.201 (5.11) .189 (4.80)	.161 (4.09) .151 (3.84)	.136 (3.45) .126 (3.20)	.1150 (2.92) .1065 (2.70)	.069 (1.75) .065 (1.65)	.106 (2.69) .102 (2.59)	.055 (1.40) .045 (1.14)	.030 (.76) .020 (.51)	.270 (6.86) .230 (5.84)
205	---	---	.136 (3.45) .126 (3.20)	.1150 (2.92) .1065 (2.70)	.047 (1.19) .037 (.94)	.076 (1.93) .066 (1.68)	.055 (1.40) .045 (1.14)	.030 (.76) .020 (.51)	.330 (8.38) .290 (7.37)
206	.201 (5.11) .189 (4.80)	.161 (4.09) .151 (3.84)	.136 (3.45) .126 (3.20)	.1150 (2.92) .1065 (2.70)	.058 (1.47) .055 (1.40)	.106 (2.69) .102 (2.59)	.067 (1.70) .057 (1.45)	.044 (1.12) .034 (.86)	.270 (6.86) .230 (5.84)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Metric equivalents are in parentheses for overall length and diameter only.
4. Dimensions shown apply after plating.
5. Indicated dimension to be from front of contact to point of engagement of socket and a .028 (72 mm) diameter square end pin.
6. See individual assembly instruction packed with contact.

FIGURE 1. Connector contact. -Continued

Dash No. and BIN code	A	B	C
204 206	.468	.250	.156
205	.625	.250	.156

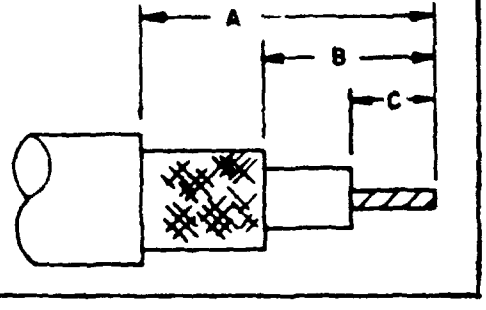


FIGURE 2. Cable stripping dimensions.

Source: https://assist.dla.mil -- Downloaded: 202610-21T18:33Z
Check the source to verify that this is the current version before use.

ASSEMBLY INSTRUCTIONS

A Strip cable as illustrated. Ends must be cut cleanly and at right angles to the axial plane of the cable. The cable must not be deformed while making cuts. See table.

B 1. Slide shield crimp sleeve back over cable jacket.

2. Slide retainer over the cable core and under the cable shield. Retainer must bottom against cable shield.

3. Slide back insulator over center conductor and cable core until it butts against the retainer

4. Slide inner socket contact over cable center conductor Cable center conductor must be visible through inspection hole in the inner socket contact. Contact must butt against the back insulator.

5. Crimp inner socket contact using crimp tool and positioner listed in table III.

C Slide front insulator, large end first, over the inner socket contact until insulator seats against inner socket contact shoulder.

D 1 Slide outer pin contact over insulator and retainer assembly Outer pin contact must butt against front insulator.

2. Bring shield crimp sleeve forward over cable shield and butt against outer pin contact shoulder

3. Crimp shield crimp sleeve using tool and dies listed in table IV

E Illustrates final assembly.

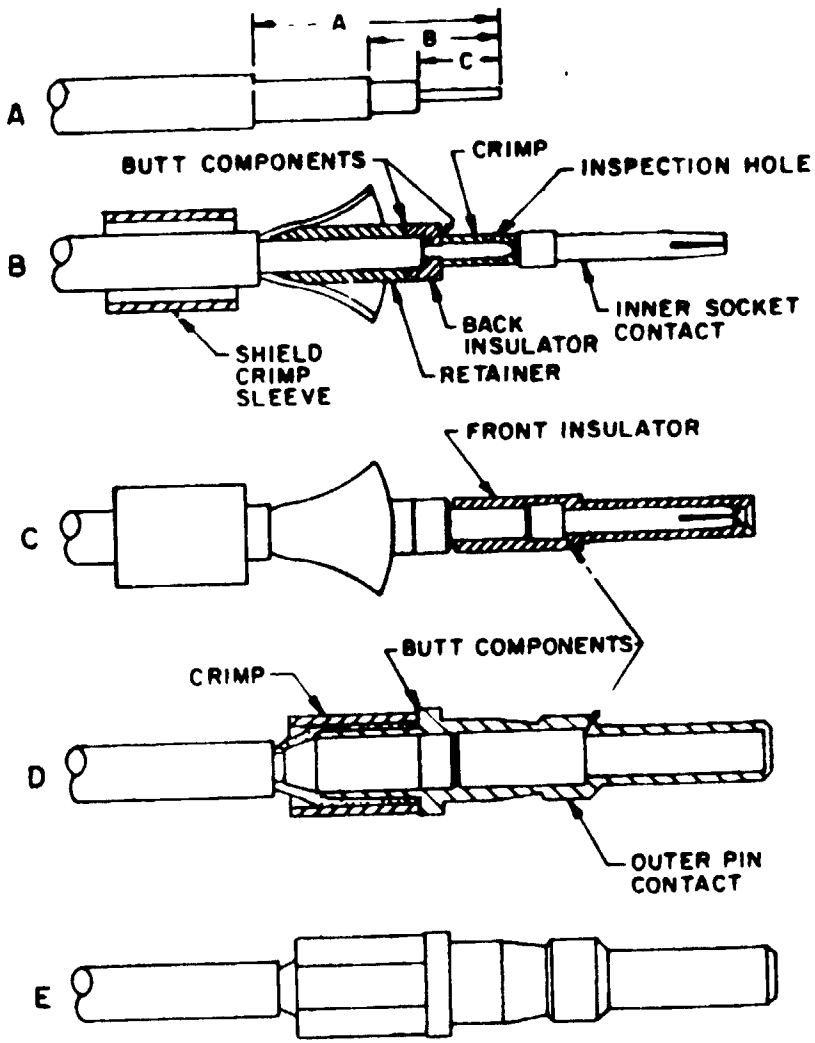


FIGURE 3. Assembly procedure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:33Z
Check the source to verify that this is the current version before use.

TABLE II. Reference data.

BIN code	Cable data					Mating contact
	Cable accommodated	O.D. of jacket	Number of shields	Dielectric O.D.	Inner conductor size	
204	M17/119-RG174	.100	1	.060	#26 AWG 7/ 0067	M39029/26-207
	M17/94-RG179	.105	1	.063	#30 AWG 7/ 004	
	M17/113-RG316	.102	1	.060	#26 AWG 7/.0067	
205	M17/93-RG178	.079 max	1	.034	#30 AWG 7/.004	M39029/26-208
206	No. 22 Shielded MIL-C-27500	.094 max	1	.048	#22 AWG 19/.0063	M39029/26-209

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T18:33Z
Check the source to verify that this is the current version before use.

TABLE III. Design characteristics.

BIN code	Color bands			Contact cavity size	Type	Class
	1st	2nd	3rd			
204	Red	Black	Yellow	12	D	A
205	Red	Black	Green	12		
206	Red	Black	Blue	12		

TABLE IV. Inner contact and shield crimp sleeve tooling.

BIN code	Inner contact tooling		Shield crimp sleeve tooling	
	Basic crimping tool	Positioner	Basic crimping tool	Die
204	M22520/2-01	M22520/2-32	M22520/5-01	M22520/5-10
205	↓	↓	---	---
206	↓	↓	M22520/5-01	M22520/5-10

(C) TABLE V. Outer contact tooling.

BIN code	Installing tool	Removal tool
204	M81969/17-05	M81969/19-09
205	↓	↓
206	↓	↓

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:33Z
Check the source to verify that this is the current version before use.

(C) TABLE VI. Contact resistance.

BIN code	Contact	accommodated	Test current (amps)	Maximum voltage drop (millivolts)					
				25° +3° -0° C		25° +3° -0° C After conditioning		150° +3° -0° C	
				Max	Max avg	Max	Max avg	Max	Max avg
204	Inner	M17/119-RG174	1	55	N/A	66	N/A	88	N/A
	Outer		12	85		102		136	
	Inner	M17/94-RG179	1	120		144		192	
	Outer		12	70		84		112	
	Inner	M17/113-RG316	1	55		66		88	
	Outer		12	75		90		120	
205	Inner	M17/93-RG178	1	120		144		192	
	Outer		12	110		132		176	
206	Inner	No. 22 shield shielded MIL-C-27500	1	10		12		16	
	Outer		12	60		72		96	

Source: https://assist.dla.mil -- Downloaded: 202640-21T18:33Z
Check the source to verify that this is the current version before use.

(C) TABLE VII. Low signal level contact resistance (inner contact only).

BIN code	Cable accommodated	Maximum contact resistance (milliohms)	
		Initial	After conditioning
204	M17/119-RG174	55	66
	M17/94-RG179	120	144
	M17/113-RG316	55	66
205	M17/93-RG178	120	144
206	No. 22 shielded MIL-C-27500	10	12

TABLE VIII. Contact engagement and separation force.

Test pin diameter (inches)	Socket contact only					
	Initial			After conditioning		
	Minimum separation force (ounces)	Maximum average engagement force (ounces)	Maximum engagement force (ounces)	Minimum separation force (ounces)	Maximum average engagement (ounces)	Maximum engagement force (ounces)
.0280 +.0002 -.0000	N/A	N/A	16	N/A	N/A	20
.0270 +.0000 -.0002	0.5	N/A	N/A	0 4	N/A	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:33Z
Check the source to verify that this is the current version before use.

TABLE IX. Dielectric withstanding voltage (applied between inner and outer contact)

Altitude	Test voltages, ac rms
Sea level	1000
50,000 feet	250

(C) TABLE X. Tensile strength (inner and outer contact crimp joint)

BIN code	Cable accommodated	Axial load (pounds minimum)	
		Inner contact	Outer contact
204	M17/119-RG174	15	15
	M17/94-RG179	3 5	15
	M17/113-RG316	15	15
205	M17/93-RG178	3.5	10
206	No 22 shielded MIL-C-27500	15	15

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:33Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, design characteristics, and configuration See figure 1 and tables I, II, and III.

Tools: See tables IV and V.

(C) Vibration: Method 2005 of MIL-STD-1344, test condition IV

(C) Shock (specified pulse): Method 2004 of MIL-STD-1344, test condition A

Mating contact See table II.

Contact resistance: The applicable test current shown in table VI shall be used.

Low signal level contact resistance (inner contact only): See table VII.

Contact engagement and separation forces:
The engagement depth shall be as encountered in normal service.
The test pins shall be in accordance with MS3197 except the diameters shall be as specified in table VIII and surface roughness shall not exceed 3.

Dielectric withstanding voltage: Applied between inner and outer contact (see table IX).

Tensile strength: Inner and outer contact crimp joint (see table X).

Manufacturer's recommend assembly instructions to be shipped with unit package.

Cable stripping: See figure 2.

(C) Assembly procedure: See figure 3.

Preparation of samples: Contacts shall be wired as required using wire in accordance with table II (cables accommodated column).

Contacts shall be supplied with all the parts required to make a complete contact assembly, including individual sealing bushings where required

QPL evaluating activity Naval Avionics Center, Code D-914, Indianapolis, Indiana 46218.

International interest: NEPR 57.

Military part number: See table XI.

(C) TABLE XI. Military part number.

BIN code	Military part number	Supersedes
204	M39029/25-204	M39029/25-01
205	M39029/25-205	M39029/25-02
206	M39029/25-206	M39029/25-03

Source: https://assist.dla.mil -- Downloaded: 202640-21T18:33Z
Check the source to verify that this is the current version before use.

Custodians
Army - CR
Navy - AS
Air Force - 85

Review activities
Army - AR, MI
Navy - EC, SH, MC
Air Force - 11, 17, 99
DLA - FS

User activities
Army -
Navy - OS
Air Force -

Preparing activity
Navy - AS

Agent:
DLA - ES

(Project 5935-3097-25)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:33Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Air Engineering Center
Engineering Specifications & Standards
Department (ESSD) Code 93
Lakehurst, NJ 08733

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions — Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE

3a NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:33Z
Check the source to verify that this is the current version before use.