MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR, PIN, CRIMP REMOVABLE, (FOR MIL-C-5015 SERIES MS3450 AND MIL-C-83723 SERIES 2 CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the contacts described herein shall consist of this specification and the latest issue of MIL-C-39029.

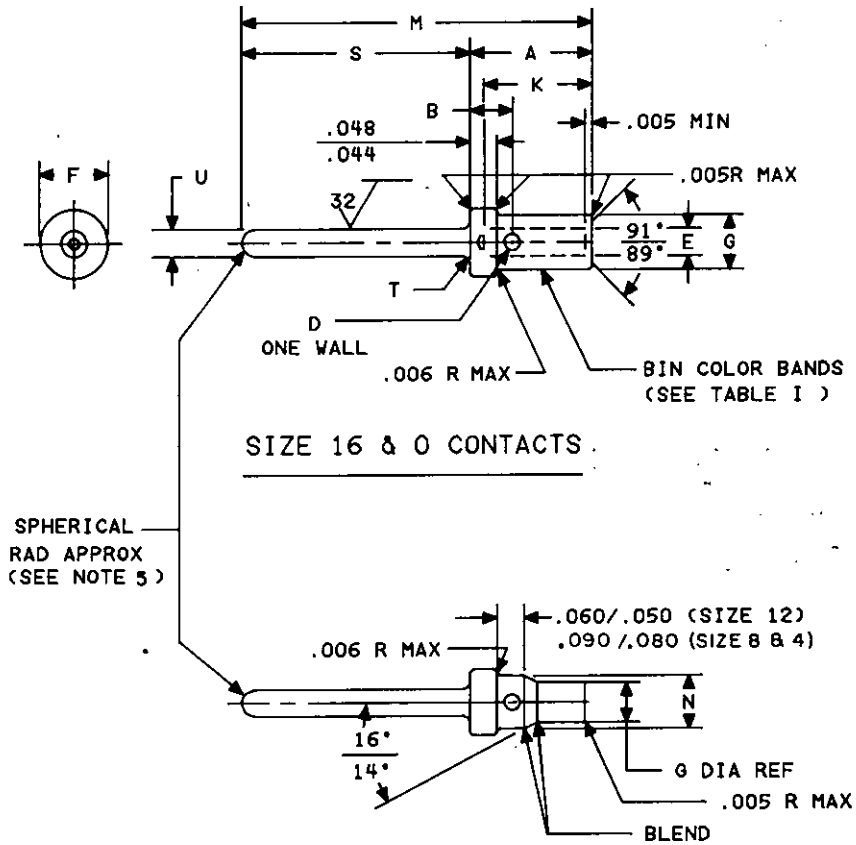


FIGURE 1. Connector contact.

Ⓑ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:34Z
Check the source to verify that this is the current version before use.

Ⓑ

BIN code	A	B	D DIA	E DIA	F DIA	G DIA	K MIN	M (REF)	N DIA	S	T MAX	U DIA
212	.300	.079	.042	.068 .066	.133 (3.38) .130 (3.30)	.103 .101		.923 (23.44)		.631 .619		.0635 .0615
213	.290	.073	.036	.102 .098	.189 (4.80) .186 (4.72)	.150 .147	.250	1.110 (28.19)	.160 .155		.015	.095 .093
214	.552	.094		.183 .179	.306 (7.77) .303 (7.70)	.265 .262	.485	1.362 (34.59)	.277 .272	.819		.143 .141
215	.542	.084	.072 .068	.283 .279	.417 (10.59) .414 (10.52)	.376 .373			.389 .384	.808		.226 .224
216	.678 .660	.124 .084		.455 .451	.615 (15.62) .611 (15.52)	.564 .561	.580	1.486 (37.74)			.065	.358 .356

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Metric equivalents are in parentheses for overall length and diameter only.
4. Dimensions shown apply after plating.
5. Spherical end dimension shall conform to MIL-C-39029A.

FIGURE 1. Connector contact - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, design characteristics, and configuration: See figure 1 and table I.

Tools: See table II.

Vibration: Method 2005 of MIL-STD-1344, test condition VI, letter J, except the duration shall be 8 hours in the longitudinal direction and 8 hours in the perpendicular direction (16 hours total).

Shock (specified pulse): Method 2004 of MIL-STD-1344, test condition A.

Mating contact: MIL-C-39029/30.

QPL evaluating activity: Naval Avionics Center, Code D-714, Indianapolis, Indiana 46218.

International interest: NEPR 57.

Superseded military part numbers will be referenced on unit package.

Military part numbers: See table III.

TABLE I. Design characteristics.

BIN code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st	2nd	3rd				
212	Red	Brown	Red	16	16	A	B
213	Red	Brown	Orange	12	12		
214 1/	Red	Brown	Yellow	8	8		
215 1/	Red	Brown	Green	4	4		
216 1/	Red	Brown	Blue	0	0		

1/ 214, 215, and 216 are not recommended for use with Navy shipboard cable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:34Z
Check the source to verify that this is the current version before use.

TABLE II. Tools.

BIN code	Basic crimpling tool	Die set	Locator	Positioner	Installing tool	Removal tool
212	M22520/1-01 M22520/7-01	---	---	M22520/1-02 Blue M22520/7-03	M81969/14-03	M81969/14-03
213	M22520/1-01	---	---	M22520/1-02 Yellow	M81969/14-04	M81969/14-04
214	M22520/23-01	M22520/23-02	M22520/23-09	---	---	M81969/29-02
215	M22520/23-01	M22520/23-04	M22520/23-11	---	---	M81969/29-03
216	M22520/23-01	M22520/23-05	M22520/23-13	---	---	M81969/29-04

TABLE III. Military part numbers.

BIN code	Military part number	Supersedes
212	M39029/29-212	M39029/29-16-16
213	M39029/29-213	M39029/29-12-12
214	M39029/29-214	M39029/29-8-8
215	M39029/29-215	M39029/29-4-4
216	M39029/29-216	M39029/29-0-0

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR
Navy - EC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army -
Navy - OS, SH
Air Force -

Agent:
DLA - ES

Preparing activity:
Navy - AS

(Project 5935-3238)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:34Z
Check the source to verify that this is the current version before use.