
MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR, SOCKET, CRIMP REMOVABLE, (FOR MIL-C-5015 MS3450 SERIES AND MIL-C-83723 SERIES II CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the contacts described herein shall consist of this document and the latest issue of Specification MIL-C-39029.

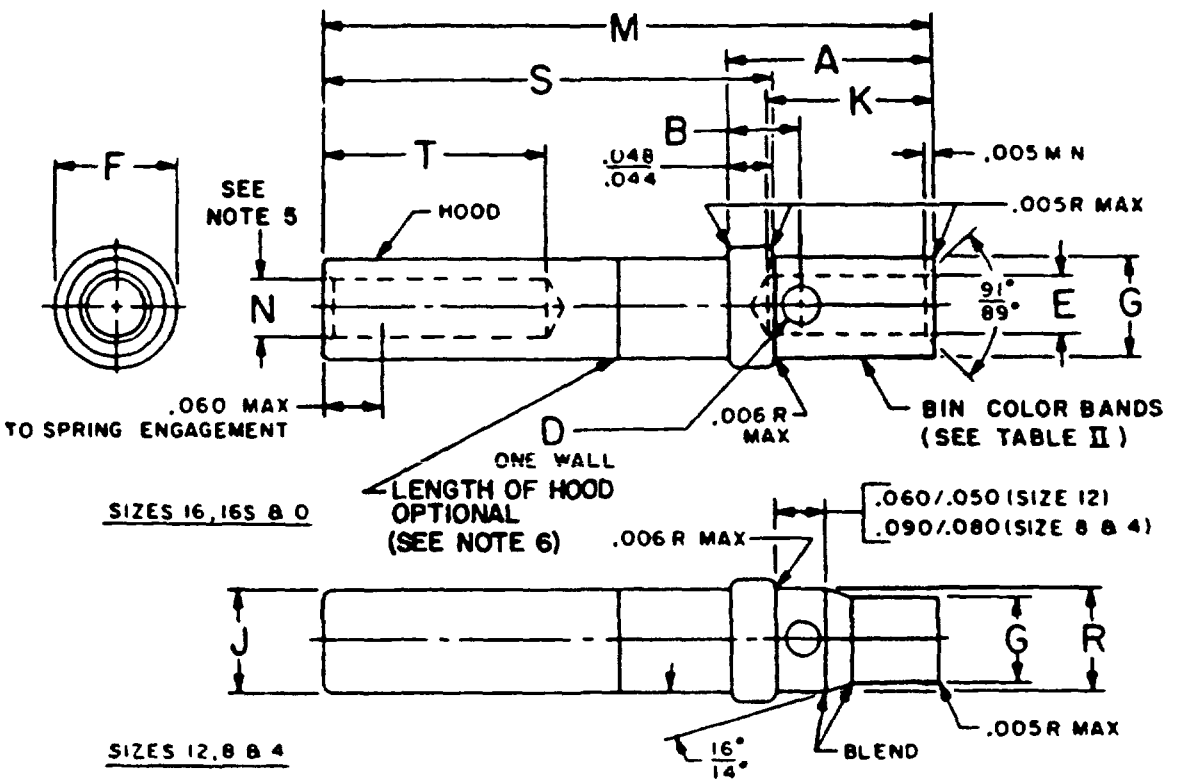

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Metric equivalents are in parentheses for overall length and diameter only.
4 Dimensions shown apply after plating.
5 E and N diameters bores shall not break through.
6 Maximum gap of .010 inch between hood and body of the contact.

(A) denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:34Z
Check the source to verify that this is the current version before use.

(A) TABLE I. Dimensions.

BIN code	A	B	D DIA	E DIA	F DIA	G DIA	J MAX DIA	K MIN	M REF	N DIA	R	S	T MIN
217				.068	.133 (3.38)	.103	.113		.911 (23.14)	.064		.666 .656	.399
218	.300 .290	.079 .073	.042 .036	.066	.130 (3.30)	.101		.250	1.101 (27.97)	1/		.856	.430
219				.102 .098	.189 (4.80) .186 (4.72)	.150 .147	.161			.0955 1/	.160 .155	.846	
220	.552	.094		.183 .179	.306 (7.77) .303 (7.70)	.265 .262	.257	.485	1.342 (34.09)	.157 .145	.277 .272		.587
221	.542	.084	.072 .068	.283 .279	.417 (10.59) .414 (10.52)	.376 .373	.336			.240 .228	.389 .384	.849 .833	
222	.678 .668	.124 .084		.455 .451	.615 (15.62) .611 (15.52)	.564 .561	.518	.580	1.466 (37.24)	.372 .360			

1/ MIN Diameter only

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:34Z
Check the source to verify that this is the current version before use.

TABLE II. Design characteristics.

BIN code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st	2nd	3rd				
217	Red	Brown	Violet	16S	16	A	B
218	Red	Brown	Gray	16	16		
219	Red	Brown	White	12	12		
220 1/	Red	Red	Black	8	8		
221 1/	Red	Red	Brown	4	4		
222 1/	Red	Red	Red	0	0		

1/ Contacts M39029/30-220, -221, and -222 are not recommended for use with Navy shipboard cable.

TABLE III. Tools

BIN code	Basic crimping	Positioner	Die set	Locator	Installing tool	Removal tool
217	M22520/1-01	M22520/1-02 Blue	---	---	M81969/14-03	M81969/14-03
218	M22520/1-01	M22520/1-02 Blue	---	---	M81969/14-03	M81969/14-03
219	M22520/1-01	M22520/1-02 Yellow	---	---	M81969/14-04	M81969/14-04
220	M22520/23-01	---	M22520/23-02	M22520/23-09	---	M81969/29-02
221	M22520/23-01	---	M22520/23-04	M22520/23-11	---	M81969/29-03
222	M22520/23-01	---	M22520/23-05	M22520/23-13	---	M81969/29-04

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, design characteristics, and configuration: See figure and tables I and II.

Tools: See table III.

(A) Vibration: Method 2005 of MIL-STD-1344, test condition VI, letter J, except the duration shall be 8 hours in the longitudinal direction and 8 hours in the perpendicular direction (16 hours total).

(A) Shock (specified pulse): Method 2004 of MIL-STD-1344, test condition A.

Mating contact: MIL-C-39029/29.

QPL evaluating activity: Naval Avionics Center, Code D-714, Indianapolis, Indiana 46218.

International interest: NEPR 57.

Superseded military part numbers will be referenced on unit package.

Military part number: See table IV.

(A) TABLE IV Military part number.

BIN code	Military part number	Supersedes
217	M39029/30-217	M39029/30-16S-16
218	M39029/30-218	M39029/30-16-16
219	M39029/30-219	M39029/30-12-12
220	M39029/30-220	M39029/30-8-8
221	M39029/30-221	M39029/30-4-4
222	M39029/30-222	M39029/30-0-0

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MU, MI
Navy - EC, SH, MC
Air Force - 11, 17, 99
DLA ES

User activities:
Army -
Navy - OS
Air Force -

Preparing activity.
Navy - AS

Agent:
DLA - ES

(Project 5935-3097-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:34Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, NJ 08733

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

U.S. MAIL

Engineering Specifications and Standards
Department (Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-C-39029/30A Contacts, Electrical Connector, Socket, Crimp Removable

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:34Z
Check the source to verify that this is the current version before use.