
MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR, SOCKET, CRIMP REMOVABLE, (FOR MIL-C-26482 SERIES 1, MIL-C-26500 AND MIL-C-26518 CONNECTORS)


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the contacts described herein shall consist of this document and the latest issue of Specification MIL-C-39029.

INACTIVE FOR NEW DESIGN
FOR AIR FORCE EQUIPMENT

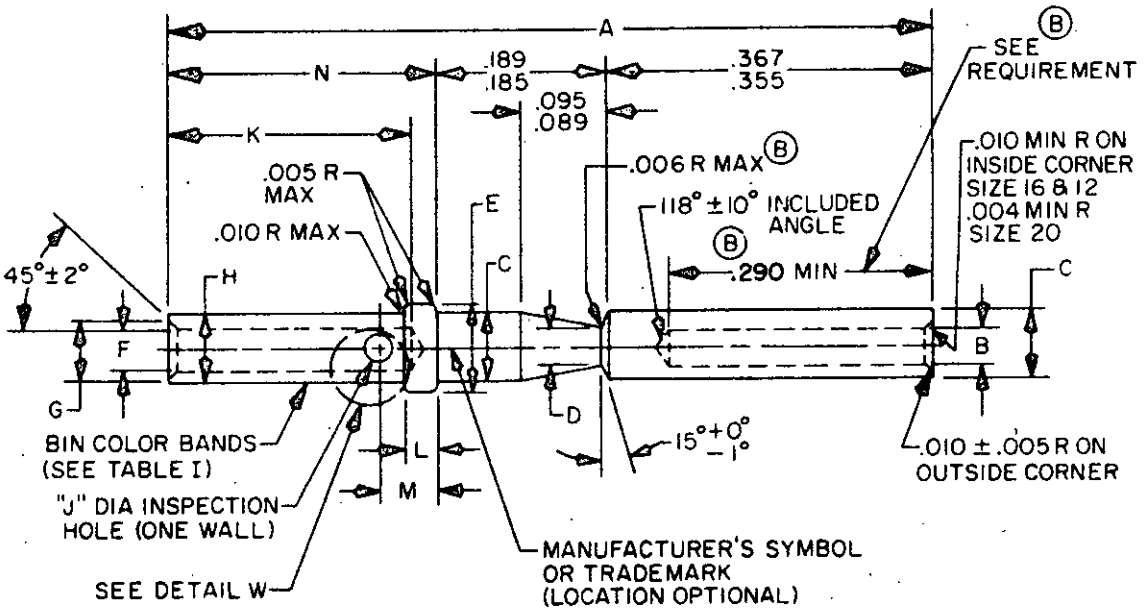

Ⓑ WIRE BARREL DESIGN
BIN CODES 247 THRU 258
(SIZE 16 & 12 CONTACTS)




DETAIL W


FIGURE 1. Socket contacts.

Ⓑ denotes changes


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:35Z
Check the source to verify that this is the current version before use.

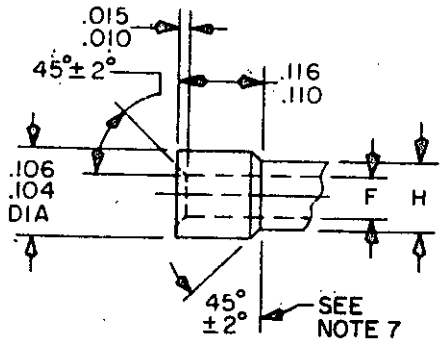

Ⓑ WIRE BARREL DESIGN
BIN CODE 449
SIZE 20 CONTACTS

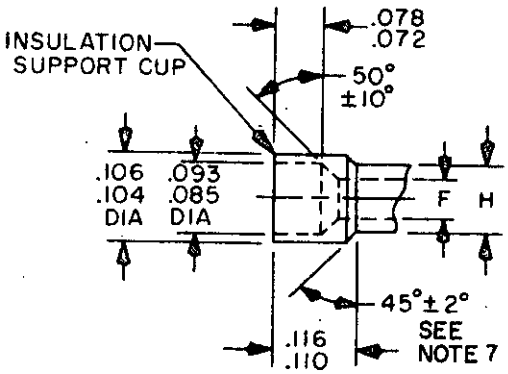

Ⓑ WIRE BARREL DESIGN
BIN CODES 259 & 260
SIZE 20 CONTACTS

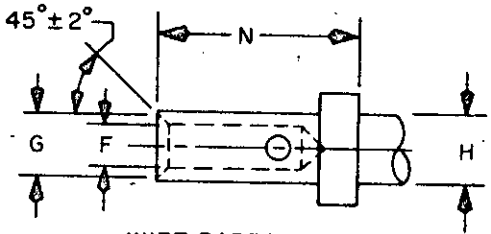

Ⓑ WIRE BARREL DESIGN
BIN CODES 242 THRU 246
SIZE 20 CONTACTS

TABLE I. Dimensions.

BIN code	A REF	B MIN	C DIA	D DIA 1/	E DIA	F DIA	G DIA	H DIA	J DIA	K MIN	L	M	N
242, 243, 244, 245 and 246	.854 (21.69)	.0415	.078	.052	.103 (2.62)	.050	.064	.078	.032		.033	.063	.308
			.076	.048	.100 (2.54)	.048	.060	.076	.026	.250	.029	.053	.304
247, 248, 249, 250, 251 and 252	.844 (21.44)	.064	.113	.087	.148 (3.76)	.068	.092	.105	.042		.048	.079	.298
			.110	.083	.144 (3.66)	.066	.080	.101	.036	.236	.044	.073	.294
253, 254, 255, 256, 257 and 258	.844 (21.44)	.0955	.161	.135	.202 (5.13)	.102	.135	.153	.042		.048	.079	.298
			.158	.131	.198 (5.03)	.098	.115	.147	.036	.236	.044	.073	.294
259, 260 and 449	.854 (21.69)	.0415	.078	.052	.103 (2.62)	.050	---	.078	.032		.033	.063	.308
			.076	.048	.100 (2.54)	.048	---	.076	.026	.267	.029	.053	.304

1/ See requirements.

FIGURE 1. Socket contacts - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:35Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.003	.08	.063	1.60	.097	2.46	.161	4.09
.004	.10	.064	1.63	.098	2.49	.185	4.70
.005	.13	.065	1.65	.100	2.54	.189	4.80
.010	.25	.068	1.73	.101	2.57	.236	5.99
.015	.38	.072	1.83	.102	2.59	.250	6.35
.026	.66	.073	1.85	.104	2.64	.267	6.78
.029	.74	.076	1.93	.105	2.67	.270	6.86
.032	.81	.078	1.98	.106	2.69	.281	7.14
.033	.84	.079	2.01	.110	2.79	.294	7.47
.036	.91	.080	2.03	.113	2.87	.298	7.57
.042	1.07	.083	2.11	.115	2.92	.300	7.62
.044	1.12	.085	2.16	.116	2.95	.304	7.72
.048	1.22	.087	2.21	.131	3.33	.308	7.82
.050	1.27	.089	2.26	.135	3.43	.355	9.02
.052	1.32	.092	2.34	.147	3.73	.367	9.32
.053	1.35	.093	2.36	.153	3.89	.854	21.69
.060	1.52	.095	2.41	.158	4.01		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Metric equivalents are in parentheses for overall length and diameter only.
4. Dimensions shown apply after plating.
5. Spherical end dimension to comply with MIL-C-39029A.
6. Contacts (Class A) are shipped for MIL-C-26482, series 1 connectors. Contacts (Class B) are shipped for MIL-C-26500 connectors.
7. Optional requirement of .036/.026 radius may be used as substitute.

FIGURE 1. Socket contacts - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:35Z
Check the source to verify that this is the current version before use.

TABLE II. Design characteristics.

BIN code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st	2nd	3rd				
(B) 242	Red	Yellow	Red	20	20	A	A
243	Red	Yellow	Orange	20	20	C-iron	A
244	Red	Yellow	Yellow	20	20	C-chromel	A
245	Red	Yellow	Green	20	20	C-alumel	A
246	Red	Yellow	Blue	20	20	C-constantan	A
247	Red	Yellow	Violet	16	16	A	A
248	Red	Yellow	Gray	16	16	A	B
249	Red	Yellow	White	16	16	C-iron	A
250	Red	Green	Black	16	16	C-chromel	A
251	Red	Green	Brown	16	16	C-alumel	A
252	Red	Green	Red	16	16	C-constantan	A
253	Red	Green	Orange	12	12	A	A
254	Red	Green	Yellow	12	12	A	B
255	Red	Green	Green	12	12	C-iron	A
256	Red	Green	Blue	12	12	C-chromel	A
257	Red	Green	Violet	12	12	C-alumel	A
258	Red	Green	Gray	12	12	C-constantan	A
259	Red	Green	White	20	20	A	A
260	Red	Blue	Black	20	20	A	B
449	Yellow	Yellow	White	20	20	A	B

REQUIREMENTS:

Dimensions, design characteristics, and configuration: See figure 1 and tables I and II.

Tools: See table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:35Z
Check the source to verify that this is the current version before use.

Ⓑ TABLE III. Tools.

BIN Code	Basic crimping tool	Positioner	Installing tool	Removal tool
242, 243, 244, 245 and 246	M22520/7-01 M22520/1-01 M22520/2-01	M22520/7-02 M22520/1-02 Red M22520/2-02	M81969/14-02 M81969/17-03	M81969/19-07
247, 248, 249, 250, 251, and 252	M22520/1-01 M22520/7-01	M22520/1-02 Blue M22520/7-03	M81969/14-03 M81969/17-04	M81969/19-08
253, 254, 255, 256, 257, and 258	M22520/1-01	M22520/1-02 Yellow	M81969/14-04 M81969/17-05	M81969/19-09
259, 260, and 449	M22520/1-01 M22520/2-01 M22520/7-01 M22520/7-01	M22520/1-02 Red M22520/2-02 M22520/7-02	M81969/17-03	M81969/19-07

Mating contact: MIL-C-39029/31.

Pressure members: Auxiliary pressure members of cantilever type shall not be used. Cantilever pressure members that are an integral part of the contact body are permissible.

Plating: Contact plating shall be in accordance with MIL-C-39029, except rhodium plated contacts shall have a minimum of thirty microinches of rhodium plate over three hundred microinches of silver plate or one hundred fifty microinches of nickel plate. Rhodium plated contacts can be used provided they were manufactured and date coded prior to 2 January 1978.

Ⓑ Location of wire stop: If an alternate method of manufacture is used, the "K" dimension shall define the location of the wire stop.

Ⓑ Vibration:

Class A contacts: Test condition III in accordance with method 2005 of MIL-STD-1344. Duration of vibration at extreme temperatures shall be 25 percent of the duration specified for the standard temperature condition.

Class B contacts: Test condition IV in accordance with method 2005 of MIL-STD-1344.

Ⓑ Shock (specified pulse):

Class A contacts: Test condition A in accordance with method 2004 of MIL-STD-1344.

Class B contacts: Test condition C in accordance with method 2004 of MIL-STD-1344.

QPL evaluating activity: Naval Weapons Support Center, Code 3064, Crane, Indiana, 47522.

International interest: NEPR 57.

Military part number: See table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:35Z
Check the source to verify that this is the current version before use.

TABLE IV. Military part number.

BIN code	Military part number	BIN code	Military part number
Ⓑ 242	MS3193-20-20A	252	MS3193-16-16C3
243	MS3193-20-20C4	253	MS3193-12-12A
244	MS3193-20-20C1	254	MS24255-12S
245	MS3193-20-20C2	255	MS3193-12-12C4
246	MS3193-20-20C3	256	MS3193-12-12C1
247	MS3193-16-16A	257	MS3193-12-12C2
248.	MS24255-16S	258	MS3193-12-12C3
249	MS3193-16-16C4	259	MS3193A20-20A
250	MS3193-16-16C1	260	MS24255-20S
251	MS3193-16-16C2	449	M39029/32-20-20

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, SH, MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army -
Navy - OS, MC
Air Force -

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5935-3051-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:35Z
Check the source to verify that this is the current version before use.