MILITARY SPECIFICATION

INDICATOR, VERTICAL SPEED, 0-6000 FPM, 2-INCH

This amendment forms a part of Military Specification MIL-I-18804B, 22 June 1964, and is mandatory for use by all Departments and Agencies of the Department of Defense.

Page 2, paragraph 2.1: Add "MIL-L-27160 Lighting, Instrument. Integral, White, General Specification for."

Page 4, paragraph 3.4.2.1: Add after first sentence "The zero setting mechanism shall be capable of repositioning the pointer a minimum of 400 FPM ascent to 400 FPM descent."

Page 4, paragraph 3.5.2: Add to paragraph "and MIL-L-27160."

Page 4, paragraph 3.5.3.: Delete second and third sentences and substitute: "A minimum of (2) two incandescent lamps for each color conforming to MIL-L-25467 and MIL-L-27160 shall be used."

Page 4, paragraph 3.5.5: Delete and substitute "Pins A and C shall be used for red lighing and pins A and B shall be used for white lighting."

Page 4, paragraph 3.6.2: Delete "1/3" in second line and substitute "1/32 inch". Sixth line after 30° add " for unlighted and 20° for lighted."

Page 4, paragraph 3.6.3: Add to first sentence " or Figure 2."

Page 5, paragraph 3.7: Add to last sentence " for the unlighted indicator."

Page 6, Figure 1 under column headed "MARKINGS": Delete "100-FT and 500-FT" and substitute " .5 and 1000-FPM." Deltete "100 FT" and substitute "100-FPM". Delete title of Figure 1 and substitute "Dial Markings for MS28075-1 and MS28075-2."

Add Figure 2 "Dial Markings for MS28075-1(B) and MS28075-2(B)" after Figure 1, page 6. Figure 2 forms page 3 of this Amendment.

FSC 6610

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:57Z
Check the source to verify that this is the current version before use.

Page 8: paragraph 4.4.2.1.2: Delete "Lighting contrast" and substitute "Lighting Plan A".

Page 8: paragraph 4.4.2.2.1: Delete "Lamp Life" and substitute "Lighting Plan B."

Page 9, paragraph 4.6.7: Delete "7" in last sentence and substitute "8".

Page 9, paragraph 4.6.7.1: Delete fourth sentence and substitute "The pointer shall return to zero within 250 FPM in both directions for the Figure 1 dial, and within 150 FPM in both directions for the Figure 2 dial".

Page 10, paragraph 4.6.14 : Delete and substitute: "Lighting Plan A. The indicator shall be subjected to and meet the requirements of the sampling Plan A test as specified in MIL-L-25467 and MIL-L-27160."


Page 12, paragraph 4.6.27: Delete and substitute: "Lighting Plan B. The indicator shall be subjected to and meet the requirements of the sampling Plan B test as specified in MIL-L-25467 and MIL-L-27160."

Custodians:
Army - AV
Navy - AS

Preparing Activity:
Navy - AS

Review Activities:
Navy - AS
Army - AV

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:57Z
Check the source to verify that this is the current version before use.

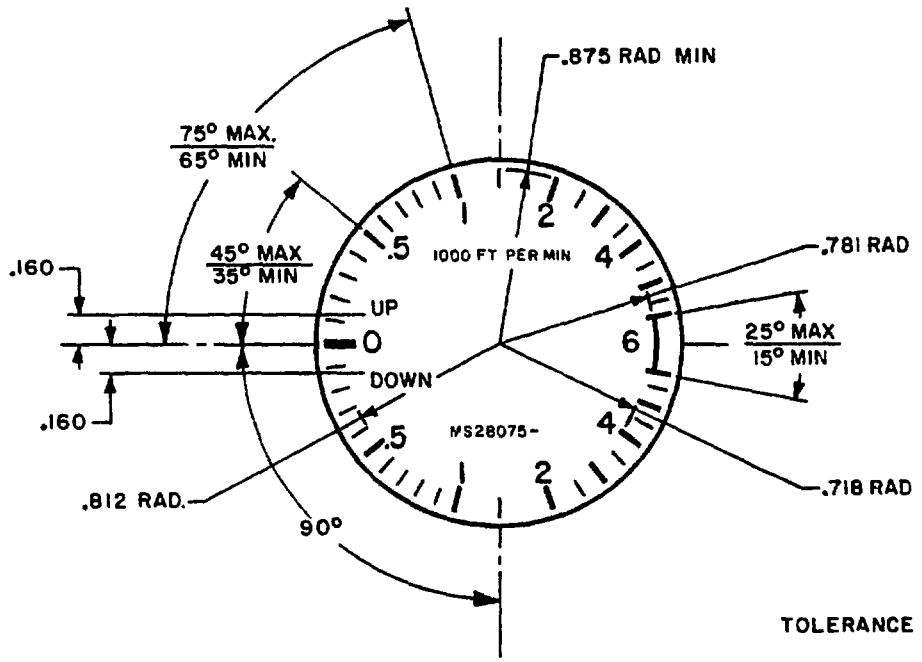

NUMERALS SHALL DISTINCTLY INDICATE THE GRADUATION TO WHICH EACH APPLIES.

MARKINGS	HEIGHT OR LENGTH ±.010	WIDTH OF LINE ±.002	MATERIAL OR FINISH
ZERO GRADUATION	---	.093	
.5 AND 1000 FPM GRADUATIONS	---	.030	
500 FPM GRADUATIONS	---	.020	LUSTERLESS WHITE FED-STD-595 COLOR 37875
100 FPM GRADUATIONS	---	.015	
ARC CONNECTING 6000 FPM MARKS	---	.030	
NUMERALS .5	.125	.020	
NUMERALS 0, 1, 2, 4, 6	.188	.024	
LETTERING "UP", "DOWN"	.094	.016	
LETTERING "1000 FT PER MIN."	.047	.008	
BACKGROUND OF DIAL	---	---	LUSTERLESS BLACK FED-STD-595 COLOR 37038
"MS28075-__" (ADD PROPER DASH NUMBER)	.047	.008	

FIGURE 2. DIAL MARKINGS FOR MS28075-1 (B) and MS28075-2 (B)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:57Z
Check the source to verify that this is the current version before use.