MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE SEALING, 45°, SHIELD TERMINATION, CATEGORY 1A (FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3, AND MIL-C-83723 SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of Specification MIL-C-85049.

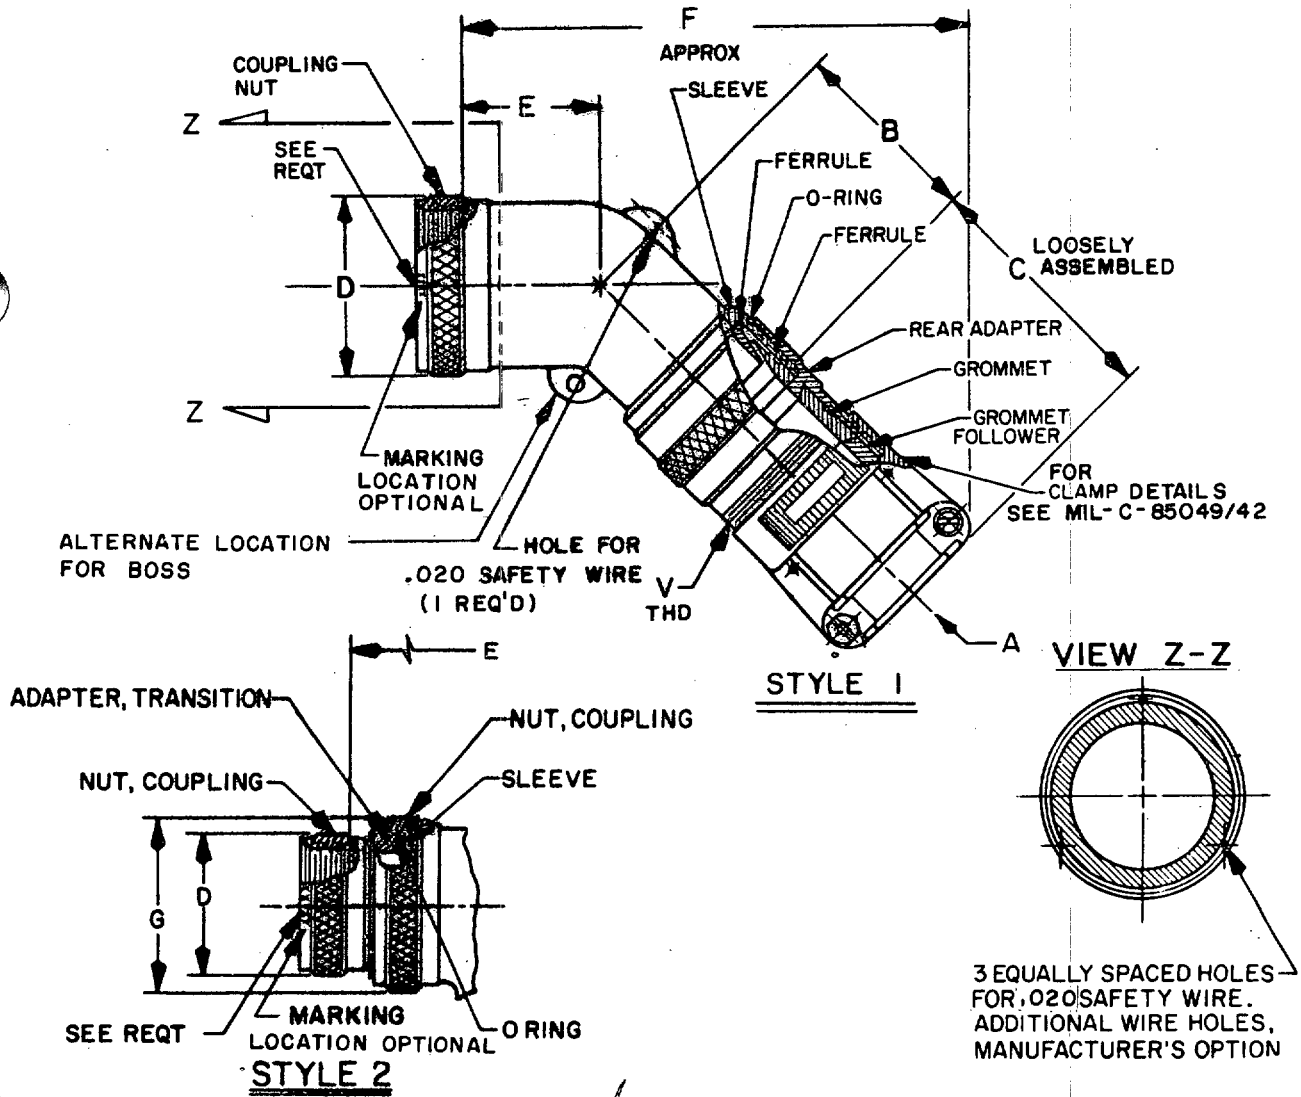


FIGURE 1. Configurations and dimensions.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
1	3				4	.125	.250	1	1.790	1.544	.669
2					6	.250	.437	2	1.910	1.544	.669
3		8	8S	8	4	.125	.250	1	1.182	1.544	.617
4		10	10S,10SL	10	4	.125	.312	1	1.850	1.544	.734
5					6	.250	.375	1	1.245	1.544	.734
6	7	12	12,12S	12	4	.125	.312	1	1.910	1.544	.858
7					6	.250	.437	1	1.910	1.544	.858
8					10	.350	.500	1	1.910	1.844	.858
9	12	14	14,14S	14	6	.250	.437	1	2.000	1.544	.984
10					10	.350	.575	1	1.655	1.844	.984

DASH NO	E ±.062	V THREAD CLASS 2A	F APPROX	G DIA MAX
1	.561	.625-24 UNEF	3.37	—
2	1.375	.750-20 UNEF	4.33	.858
3	.500	.625-24 UNEF	2.88	—
4	.561	.625-24 UNEF	3.41	—
5	.561	.750-20 UNEF	3.05	—
6	.625	.625-24 UNEF	3.52	—
7	.625	.750-20 UNEF	3.58	—
8	.625	1.000-20 UNEF	3.86	—
9	.688	.750-20 UNEF	3.71	—
10	688	1.000-20 UNEF	3.74	—

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C 83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
11	19	16	16,16S	16	6	.250	.437	1	2.110	1.544	1.112
12					12	.500	.700	1	1.750	1.916	1.112
13	27	18	18	18	10	.350	.625	1	2.300	1.844	1.218
14					16	.625	.779	1	1.938	2.000	1.218
15	37	20	20	20	10	.350	.625	1	2.300	1.844	1.345
16					16	.625	.904	1	1.938	2.000	1.345
17		22	22	22	12	.500	.750	1	2.450	1.916	1.468
18					20	.875	1.029	1	2.093	2.230	1.468
19		24	24	24	12	.500	.750	1	2.450	1.916	1.593
20					20	.875	1.144	1	2.093	2.230	1.593

DASH NO	E ±.062	V THREAD CLASS 2A	F APPROX	G DIA MAX
11	.781	.750-20 UNEF	3.88	–
12	.781	1.187-18 UNEF	4.03	–
13	.968	1.000-20 UNEF	4.48	–
14	.968	1.437-18 UNEF	4.49	–
15	.968	1.000-20 UNEF	4.48	–
16	.968	1.437-18 UNEF	4.49	–
17	1.063	1.187-18 UNEF	4.81	–
18	1.063	1.750-18 UNS	4.98	–
19	1.063	1.187-18 UNEF	4.81	–
20	1.063	1.750-18 UNS	4.98	–

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR				CLAMP SIZE	A CABLE RANGE		STYLE	B	C	D DIA
	MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III		MIN	MAX		±.062	REF	MAX
21			28		16	.625	.937	1	2.500	2.000	1.969
22					24	1.000	1.375	1	2.156	2.024	1.969
23			32		16	.625	.937	1	2.600	2.000	2.219
24					20	.875	1.250	1	2.600	2.230	2.219
25					28	1.250	1.625	1	2.250	2.550	2.219
26			36		16	.625	.937	1	2.690	2.000	2.469
27					24	1.000	1.375	1	2.690	2.024	2.469
28					32	1.437	1.840	1	2.344	2.600	2.469
29			40		16	.625	.937	1	2.690	2.000	2.719
30					24	1.000	1.375	1	2.690	2.024	2.719

DASH NO	E ±.062	V THREAD CLASS 2A	F APPROX	G DIA MAX
21	1.188	1.437-18 UNEF	5.11	–
22	1.188	2.000-18 UNS	5.09	–
23	1.250	1.437-18 UNEF	5.24	–
24	1.250	1.750-18 UNS	5.52	–
25	1.250	2.250-16 UN	5.73	–
26	1.281	1.437-18 UNEF	5.33	–
27	1.281	2.000-18 UNS	5.56	–
28	1.281	2.500-16 UN	5.95	–
29	2.031	1.437-18 UNEF	6.08	–
30	2.031	2.000-18 UNS	6.31	–

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
31			40		32	1.437	1.875	1	2.344	2.600	2.719
32					16	.625	.937	1	2.690	2.000	2.969
33			44		24	1.000	1.375	1	2.690	2.024	2.969
34					32	1.437	1.875	1	2.344	2.600	2.969
35					16	.625	.937	1	2.690	2.000	3.219
36			48		24	1.000	1.375	1	2.690	2.024	3.219
37					32	1.437	1.875	1	2.344	2.600	3.219
38	61				12	.500	.750	1	2.450	1.916	1.653
39					20	.875	1.184	1	2.093	2.230	1.653
40	19	16	16,16S	16	10	.350	.625	1	2.110	1.844	1.112

DASH NO	E ±.062	V THREAD CLASS 2A	F APPROX	G DIA MAX
31	2.031	2.500-16 UN	6.70	–
32	2.031	1.437-18 UNEF	6.08	–
33	2.031	2.000-18 UNS	6.31	–
34	2.031	2.500-16 UN	6.70	–
35	2.031	1.437-18 UNEF	6.08	–
36	2.031	2.000-18 UNS	6.31	–
37	2.031	2.500-16 UN	6.70	–
38	1.063	1.187-18 UNEF	4.81	–
39	1.063	1.750-18 UNS	4.98	–
40	.781	1.000-20 UNEF	4.16	–

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR				CLAMP SIZE	A CABLE RANGE		STYLE	B	C	D DIA
	MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III		MIN	MAX		±.062	REF	MAX
41	27	18	18	18	4	.125	.312	1	2.300	1.544	1.218
42					6	.250	.437	1	2.300	1.544	1.218
43	37	20	20	20	6	.250	.437	1	2.300	1.544	1.345
44		22	22	22	4	.125	.312	1	2.450	1.544	1.468
45					6	.250	.437	1	2.450	1.544	1.468
46		24	24	24	10	.350	.625	1	2.450	1.844	1.593
47			36		12	.500	.750	1	2.690	1.916	2.469
48			40		12	.500	.750	1	2.690	1.916	2.719
49		10	10S, 10SL	10	6	.250	.437	2	1.910	1.544	.734
50	12	14	14, 14S	14	12	.500	.750	2	2.300	1.916	.984

DASH NO	E ±.062	V THREAD CLASS 2A	F APPROX	G DIA MAX
41	.968	.625-24 UNEF	4.13	–
42	.968	.750-20 UNEF	4.20	–
43	.968	.750-20 UNEF	4.20	–
44	1.063	.625-24 UNEF	4.34	–
45	1.063	.750-20 UNEF	4.40	–
46	1.063	1.000-20 UNEF	4.68	–
47	1.281	1.187-18 UNEF	5.20	–
48	2.031	1.187-18 UNEF	5.95	–
49	1.375	.750-20 UNEF	4.33	.858
50	1.717	1.187-18 UNEF	5.36	1.218

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
51	19	16	16,16S	16	16	.625	.937	2	2.450	2.000	1.112
52	27	18	18	18	12	.500	.750	1	2.300	1.916	1.218
53	61				16	.625	.937	1	2.450	2.000	1.653
54	37	20	20	20	12	.500	.750	1	2.300	1.916	1.345
55					20	.875	1.250	2	2.500	2.230	1.345
56		22	22	22	10	.350	.625	1	2.450	1.844	1.468
57					16	.625	.937	1	2.450	2.000	1.468
58					20	.875	1.250	2	2.500	2.230	1.468
59		24	24	24	16	.625	.937	1	2.450	2.000	2.093
60			28		12	.500	.750	1	2.500	1.916	1.969

DASH NO	E ±.062	V THREAD CLASS 2A	F APPROX	G DIA MAX
51	1.812	1.437-18 UNEF	5.70	1.468
52	.968	1.187-18 UNEF	4.61	—
53	1.063	1.437-18 UNEF	4.95	—
54	.968	1.187-18 UNEF	4.61	—
55	1.936	1.750-18 UNS	6.14	1.969
56	1.063	1.000-20 UNEF	4.68	—
57	1.063	1.437-18 UNEF	4.95	—
58	1.936	1.750-18 UNS	6.14	1.969
59	1.063	1.437-18 UNEF	4.95	—
60	1.188	1.187-18 UNEF	4.97	—

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
61			28		20	.875	1.250	1	2.500	2.230	1.969
62			32		24	1.000	1.375	1	2.600	2.024	2.219
63			36		20	.875	1.250	1	2.690	2.230	2.469
64					28	1.250	1.625	1	2.690	2.550	2.469
65			40		20	.875	1.250	1	2.690	2.230	2.719
66					28	1.250	1.625	1	2.690	2.550	2.719
67			44		20	.875	1.250	1	2.690	2.230	2.969
68					28	1.250	1.625	1	2.690	2.550	2.969
69			48		20	.875	1.250	1	2.690	2.230	3.219
70					28	1.250	1.625	1	2.690	2.550	3.219

DASH NO	E ±.062	V THREAD CLASS 2A	F APPROX	G DIA MAX
61	1.188	1.750-18 UNS	5.39	—
62	1.250	2.000-18 UNS	5.47	—
63	1.281	1.750-18 UNS	5.62	—
64	1.281	2.250-16 UN	6.08	—
65	2.031	1.750-18 UNS	6.37	—
66	2.031	2.250-16 UN	6.83	—
67	2.031	1.750-18 UNS	6.37	—
68	2.031	2.250-16 UN	6.83	—
69	2.031	1.750-18 UNS	6.37	—
70	2.031	2.250-16 UN	6.83	—

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
71	7	12	12,12S	12	10	.350	.625	2	2.110	1.844	.858
72	27	18	18	18	16	.625	.937	2	2.450	2.000	1.218
73	X	24	24	24	20	.875	1.250	2	2.500	2.230	1.468
74	12	14	14,14S	14	4	.125	.312	1	2.000	1.544	.984
75	19	16	16,16S	16	4	.125	.312	1	2.110	1.544	1.112

DASH NO	E ±.062	V THREAD CLASS 2A	F APPROX	G DIA MAX
71	1.529	1.000-20 UNEF	4.90	1.112
72	1.812	1.437-18 UNEF	5.69	1.468
73	1.936	1.750-18 UNS	6.13	1.969
74	.688	.625-24 UNEF	3.64	—
75	.781	.625-24 UNEF	3.81	—

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.617	15.67	2.093	53.16	3.64	92.5	4.34	110.2	5.09	129.3	5.69	144.5
.669	16.99	2.219	56.36	3.71	94.2	4.40	111.8	5.11	129.8	5.70	144.8
.734	18.64	2.469	62.71	3.74	95.0	4.48	113.8	5.20	132.1	5.73	145.5
.858	21.79	2.719	69.06	3.81	96.8	4.49	114.0	5.24	133.1	5.95	151.1
.984	24.99	2.88	73.2	3.86	98.0	4.61	117.1	5.33	135.4	6.08	154.4
1.112	28.24	2.969	75.41	3.88	98.6	4.68	118.9	5.36	136.1	6.13	155.7
1.218	30.94	3.05	77.5	4.03	102.4	4.81	122.2	5.39	136.9	6.14	156.0
1.345	34.16	3.219	81.76	4.13	104.9	4.90	124.5	5.47	138.9	6.31	160.3
1.468	37.29	3.37	85.6	4.16	105.7	4.95	125.7	5.52	140.2	6.37	161.8
1.593	40.46	3.41	86.6	4.20	106.7	4.97	126.2	5.56	141.2	6.70	170.2
1.653	41.99	3.52	89.4	4.33	110.0	4.98	126.5	5.62	142.7	6.83	173.5
1.969	50.01	3.58	90.9								

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals and ±.02 (.51 mm) for two place decimals.
4. Dimensions apply after plating.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.

Interface dimensions shall conform to MS3155 (design standard).


Material and finish:
Accessory components shall be as shown in table I.
Grommet and O-Ring - Silicone, per ZZ-R-765, class 3A or 3B.
Clamp assembly screws - 316 series corrosion resistant steel.

TABLE I. Material and finish

Component	Material	Finish
Body	Aluminum alloy in accordance with MIL-C-85049	W 1/ N
Body	Corrosion resistant steel 316 series per QQ-S-763	B, S

1/ Not for Navy use.

Part number: See example below:

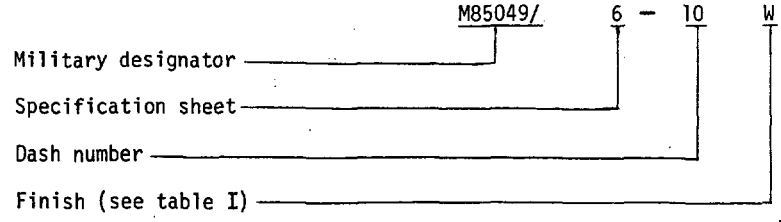

Simplified assembly instructions shall be packaged with each accessory.


Applications:
a. These accessories are for shield termination and environmental applications. Armor shield termination and environmental applications may be achieved by reversing the ferrules and grommets.
b. For assembly instructions see figure 2 of MIL-C-85049/25.
c. Style 2 applies when the cable diameter exceeds the "E" diameter of MS3155.

Qualification:
See MIL-C-85049, category 1A.

QPL evaluating activity: Naval Weapons Support Center, Code 3064, Crane, IN 47522.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Supersession data:

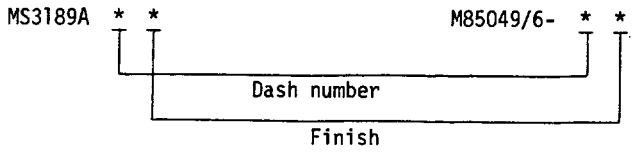

old	new
A and C	W
N	N
D	W
S	S,B

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11
DLA - ES

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5935-3067-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-85049/6

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, NJ 08733

POSTAGE AND FEES PAID
Navy Department
DOD-316

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Engineering Specifications and Standards Department(Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.