MIL-R-82507A(OS)
19 Nov 1970
Superseding
MIL-R-82507(OS)
7 August 1967

MILITARY SPECIFICATION

REAR COVER

(For Torpedo Mark 37 Mod 2 and Mod 3)

This specification has been approved by the Naval Ordnance Systems Command, Department of the Navy

1. SCOPE

1.1 This specification establishes the requirements for the procurement of a rear cover, LD 162552, which provides the necessary connectors to adapt the acoustic panel to the wiring in the torpedo cabling.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-B-621	Box, Wood, Nailed and Lock-Corner

Military

MIL-P-116	Preservation, Method of
MIL-E-82590	Environmental Requirements and Tests (For Torpedo Mk 37 Components and Assemblies)

STANDARDS

Military

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-147	Palletized and Containerized Unit Loads, 40" x 48" Pallets, Skids,

FSC 1355

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

DRAWINGS

Naval Ordnance Systems Command

NAVORD LD 162552	Rear Cover, Assembled Unit
NAVORD Dwg 696713	Rear Cover Schematic Diagram

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Bureau of Standards Publications

Handbook H28	Screw Thread Standards for Federal Service

(Applications for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402.)

United States of America Standards Institute

USAS Y32.2 1967	Graphic Symbols for Electrical and Electronic Diagrams

(Applications for copies should be addressed to DOD Single Stock Point, U.S. Naval Supply Depot, Philadelphia, Pennsylvania 19120.)

3. REQUIREMENTS

3.1 Description. The rear cover is a flanged aluminum cover which contains the connecters necessary to adapt the wiring in the interconnection plate assembly to the wiring in the torpedo. The cover also provides a seal for the acoustic panel assembly.

3.2 General requirements.

3.2.1 Data required. No data is required by this specification (other than reports accompanying samples submitted for preproduction and periodic

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:12Z
Check the source to verify that this is the currentversion before use.

production testing), or by applicable documents referenced in Section 2, unless specified in the contract or order (see 6.2).

3.2.2 Preproduction sample. Unless otherwise specified in the contract or order, preproduction samples of the rear cover shall be manufactured using the methods and procedures proposed for the production lot. These units shall be tested as specified in Section 4 herein and are for the purpose of determining, prior to starting production, that the contractor's production methods are capable of producing rear covers that comply with the technical requirements of the contract. See 4.3.1.

3.2.3 Materials. Unless otherwise specified in the contract, requisition, or order, all materials and purchased parts entering into the final assembly of the rear cover shall conform strictly to the detailed requirements indicated on the applicable drawings, specifications, and publications listed in LD 162552.

3.2.4 Surface treatment, construction, and dimensions. Surface treatment, construction, and dimensions for the rear cover shall be in accordance with applicable drawings, specifications, and publications listed in LD 162552.

3.2.5 Moisture, fungus, and corrosion. The rear cover shall be rendered moisture, fungus, and corrosion resistant in accordance with detail requirements specified on the drawings and specifications listed in LD 162552.

3.2.6 Marking. Marking of assemblies, subassemblies, and parts shall be in accordance with applicable drawings listed in LD 162552.

3.2.7 Threads. Unless otherwise specified, all threads shall be in accordance with National Bureau of Standards Handbook H28. The class or fit for threads shall be as specified on the applicable drawings.

3.2.8 Conflicting requirements. In the event of conflict between the documents referenced herein and the contents of this specification, the contents of this specification shall apply.

3.3 Symbols. Schematic diagram symbols shall be interpreted in accordance with USAS Y32.2 1967.

3.4 Performance requirements and product characteristics. The rear cover shall meet the following performance requirements and product characteristics:

3.4.1 Continuity. All wires in the rear cover shall be electrically continuous, when tested as specified in 4.4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

3.4.1.1 Continuity shall exist between each pin of P801 and the corresponding pin or pins of J801, J806, and P805, as depicted on NAVORD Drawing 696713.

3.4.1.2 Continuity shall exist between each pin of P802 and the corresponding pin or pins of J802, as depicted on NAVORD Drawing 696713.

3.4.1.3 Continuity shall exist between each pin of P803 and the corresponding pin or pins of J803 and J806, as depicted on NAVORD Drawing 696713.

3.4.1.4 Continuity shall exist between each pin of P804 and the corresponding pin or pins of J804, as depicted on NAVORD Drawing 696713.

3.4.1.5 Continuity shall exist between each pin of P805 and the corresponding pin or pins of J801, J803, and J806, as depicted on NAVORD Drawing 696713.

3.4.1.6 Continuity shall exist between pins A, B, F, H, J, N, 3, 8, 11, 12, 15 of J806 and the corresponding pin or pins of J801, J803, and J804, as depicted on NAVORD Drawing 696713.

3.4.2 Dielectric. The rear cover shall withstand the specified potentials without breakdown, puncturing of insulation, or arcing, when tested as specified in 4.4.4.2.

3.4.2.1 The dielectric withstanding voltage for connector 801 shall be 1000 volts rms at 60 Hertz (Hz) for one minute, applied between each pin and all other pins and the connector shell, except for pin M. The dielectric withstanding voltage for pin M shall be 2400 volts rms at 60 Hz for one minute applied between pin M and all other pins and the connector shell.

3.4.2.2 The dielectric withstanding voltage for connector 802 shall be 1000 volts rms at 60 Hz for one minute applied between each pin and all other pins and the connector shell.

3.4.2.3 The dielectric withstanding voltage for connector 803 shall be 1000 volts rms at 60 Hz for one minute applied between each pin and all other pins and the connector shell.

3.4.2.4 The dielectric withstanding voltage for connector 804 shall be 1000 volts rms at 60 Hz for one minute applied between each pin and all other pins and the connector shell.

3.4.2.5 The dielectric withstanding voltage for connector 805 shall be 1000 volts rms at 60 Hz for one minute applied between each pin and all other pins and the connector shell.

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:12Z
Check the source to verify that this is the currentversion before use.

3.4.3 Insulation resistance. The rear cover shall meet the minimum insulation resistance requirements when tested as specified in 4.4.4.3.

3.4.3.1 With an applied voltage of 500 volts dc the insulation resistance shall be 30 megohms between each wire and all other wires and the connector shell. This test is to be performed on all connectors.

3.4.4 Direct current resistance. The rear cover shall meet the minimum direct-current resistance requirements when tested as specified in 4.4.4.4.

3.4.4.1 The direct current resistance between the shell of P802 and the threaded hole marked GRD (located on the panel mounting flange) shall not exceed 0.20 ohm.

3.5 Environmental requirements. The rear cover shall meet the other applicable requirements of this specification during or after the tests defined or specified in 4.5.

3.5.1 Vibration. The rear cover shall meet the following vibration requirements:

3.5.1.1 Vibration, nonoperating. The rear cover shall show no damage and shall meet all the performance requirements and product characteristics of this specification after being tested as in 4.5.2.2.

3.5.1.2 Vibration, operating. The rear cover shall show no damage and shall meet all the performance requirements and product characteristics of this specification during and after the test specified in 4.5.2.3.

3.5.1.3 Vibration, transportation. The rear cover shall show no damage and shall meet all the performance requirements and product characteristics of this specification after being tested as in 4.5.2.4.

3.5.2 Shock, transportation. The rear cover shall show no damage and shall meet all the performance requirements and product characteristics of this specification after being tested as in 4.5.3.

3.5.3 Temperature and humidity

3.5.3.1 High temperature and humidity, nonoperating. The rear cover shall show no damage and shall meet all the performance requirements and product characteristics of this specification after being tested as in 4.5.4.1.

3.5.3.2 High temperature, operating. The rear cover shall be capable of meeting all the performance requirements of this specification while undergoing the test specified in 4.5.4.2.

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:12Z
Check the source to verify that this is the currentversion before use.

3.5.3.3 Low temperature, nonoperating. The rear cover shall meet all the performance requirements and product characteristics of this specification after being tested as in 4.5.4.3.

3.5.3.4 Low temperature, operating. The rear cover shall be capable of meeting all the performance requirements of this specification while undergoing the test specified in 4.5.4.4.

3.6 Cleanup. Prior to and after final assembly all parts, components and the assembly shall be throughly cleaned of loose, spattered, or excess solder, metal chips and other foreign matter. Burrs and sharp edges as well as excessive rosin flash shall be removed.

3.7 Workmanship. The rear cover, including all parts and accessories, shall be constructed and finished in a manner to ensure compliance with all requirements of this specification. Particular attention shall be paid to neatness and thoroughness of soldering, wiring, impregnation of coils, marking of parts and assemblies, plating, painting, riveting, machine screw assemblage, welding, brazing, and freedom of parts from burrs and sharp edges. The standards of workmanship exhibited in any approved preproduction sample, subject to any qualification stated in the Government's notice of approval, shall be determinative of the requirements of the contract relative to workmanship insofar as not specifically covered by applicable specifications.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. Inspection of the rear covers shall be classified as follows:

(a) Preproduction inspection (paragraph 4.5)

(b) Quality conformance inspection (paragraph 4.4)

(c) Periodic production inspection (paragraph 4.5)

4.3 Sampling

4.3.1 Preproduction. A preproduction sample of five rear covers, manufactured in accordance with 3.2.2, shall be subjected to the preproduction tests detailed in 4.5 at an activity designated by the procuring activity. Acceptance of the preproduction sample shall be based on no defects in the sample. Further production of the rear cover by the supplier, prior to the approval of the preproduction sample, shall be at the supplier's risk.

4.3.2 Lot size. Unless otherwise specified in the contract or order, each shipment of units of product shall be a separate "inspection lot" and may differ from the quantity specified in the total order or contract. In any event, all units of a single "inspection lot" shall be made to the same design, with the same materials and manufacturing techniques, and shall be part of one continuous production run.

4.3.3 Periodic production samples. From each succeeding lot or grand lot of 300 or less that have passed the quality conformance inspection of 4.4, a random sample of five rear covers will be selected for submission to an activity designated by the procuring activity to determine compliance of the samples with the requirements of the contract, specification, and drawings. The rear covers shall be considered satisfactory if they meet all specification and pertinent drawings requirements and withstand the tests specified in 4.4 and 4.5. Failure of the periodic production sample to comply with these requirements will result in the rejection of the lot, as determined by the procuring activity.

4.4 Quality conformance inspections. Each rear cover delivered under contract shall be subjected to the following tests and examinations. Failure to satisfactorily pass any test specified herein shall be considered cause for rejection.

4.4.1 Test conditions. Unless otherwise specified, the rear cover shall be subjected to quality conformance tests under the following conditions:

4.4.1.1 Temperature: Room ambient 65 degrees F to 95 degrees F (18 degrees Centigrade (C) to 35 degrees C).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

4.4.1.2 Altitude: Normal ground atmospheric pressure.

4.4.1.3 Vibration: None.

4.4.1.4 Humidity: Room ambient to 95 percent relative maximum.

4.4.2 Test and inspection equipment and facilities. The manufacturer shall furnish and maintain all necessary test equipment and facilities and shall provide personnel for performing all quality conformance tests. The test equipment shall be adequate in quantity and, unless definite requirements are specified, shall be of sufficient accuracy and quality to permit performance of the required quality conformance tests.

4.4.3 Test equipment. The following items of test equipment are required to perform the quality conformance tests set forth in this specification.

4.4.3.1 A continuity checker, MOD NMD/Y or equivalent.

4.4.3.2 A high potential test set capable of producing ac voltage of 60 Hz, continuously variable from 0 to 3000 volts, and containing a sensing element to indicate insulation failure and a meter to indicate terminal voltage.

4.4.3.3 A megohmmeter, having a range of 0-50 megohms with an accuracy of 2 percent, capable of measuring insulation resistance at 500 volts dc.

4.4.3.4 An ohmmeter, AN/USM-21 or equivalent.

4.4.4 Test procedure

4.4.4.1 Continuity tests

4.4.4.1.1 For each combination of pins on P801 and J801, J806, or P805 described in 3.4.1.1, connect one terminal of the continuity checker to a pin of P801 and connect the other terminal of the checker to the corresponding pin of J801, J806, or P805. In each case when the connections to the checker are completed the checker buzzer shall sound and the checker lamp shall light, indicating a closed circuit.

4.4.4.1.2 For each combination of pins on J802 and P802, described in 3.4.1.2, connect one terminal of the continuity checker to a pin of J802 and connect the other terminal of the checker to the corresponding pin of P802. In each case when the connections to the checker are completed the checker buzzer shall sound and the checker lamp shall light, indicating a closed circuit.

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:12Z
Check the source to verify that this is the current version before use.

4.4.4.1.3 For each combination of pins on P803 and J803 or J806, described in 3.4.1.3, connect one terminal of the continuity checker to a pin of P803 and connect the other terminal of the checker to the corresponding pin in J803 or J806. In each case when the connections to the checker are completed the checker buzzer shall sound and the checker lamp shall light, indicating a closed circuit.

4.4.4.1.4 For each combination of pins on P804 and J804, described in 3.4.1.4, connect one terminal of the continuity checker to a pin of P804 and connect the other terminal of the checker to the corresponding pin in J804. In each case when the connections to the checker are completed the checker buzzer shall sound and the checker lamp shall light, indicating a closed circuit.

4.4.4.1.5 For each combination of pins of P805 and J801, J803, or J806, described in 3.4.1.5, connect one terminal of the continuity checker to a pin of P805 and connect the other terminal of the checker to the corresponding pin of either J801, J803, or J806. In each case when the connections to the checker are completed the checker buzzer shall sound and the checker lamp shall light, indicating a closed circuit.

4.4.4.1.6 For each combination of pins of J806 and J801, J803, or J804, described in 3.4.1.6, connect one terminal of the continuity checker to the specified pins of J806 and connect the other terminal of the checker to the corresponding pin of either J801, J803, or J804. In each case when the connections to the checker are completed the checker buzzer shall sound and the checker lamp shall light, indicating a closed circuit.

4.4.4.2 Dielectric tests

4.4.4.2.1 Connector 801 shall withstand a test potential of 2400 volts 60 Hertz ac between pin M and all mutually insulated pins and between pin M and the connector shell for one minute minimum without breakdown.

4.4.4.2.2 Connector 801 shall withstand a test potential of 1000 volts 60 Hertz ac between pin L and all mutually insulated pins and between pin L and the connector shell for one minute minimum without breakdown.

4.4.4.2.3 With the exception of pins L and M, connector 801 shall withstand a test potential of 1000 volts 60 Hertz ac between each pin and all mutually insulated pins and between each pin and the connector shell for one second without breakdown.

4.4.4.2.4 Connectors 802, 803, 804, and 805 shall withstand a test potential of 1000 volts 60 Hertz ac between each pin and all mutually insulated pins and between each pin and the connector shell for one second without breakdown.

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:12Z
Check the source to verify that this is the currenversion before use.

4.4.4.2.5 For each combination of wires of connector P805, described in 3.4.2.5, connect one terminal of the power supply to a pin of P805 and connect all other pins of P805 and the connector shell to the return terminal of the power supply. Apply the potential indicated in 3.4.2.5 for one second, after which connector P805 shall show no damage.

4.4.4.3 Insulation resistance test. The insulation resistance between hi-potted points shall be 30 megohms minimum at 500 volts dc.

4.4.4.4 Direct current resistance. Connect one lead of the ohmmeter to the shell of P802 and the other lead of the ohmmeter to the threaded hole marked GRD (located on the panel mounting flange). The resistance indicated shall not exceed the minimum requirement specified in 3.4.4.1.

4.4.4.5 Visual and dimensional examination. Each rear cover shall be examined to determine conformance with the requirements for workmanship and dimensions.

4.4.4.6 Preservation, packaging, packing, and marking. Preservation, packaging, packing, and marking of the rear cover shall conform to Section 5 of this specification.

4.5 Preproduction and periodic production inspection. The preproduction and periodic production samples, after satisfactorily passing the quality conformance inspections detailed in 4.4, shall be subjected to the following tests and examinations. Certified inspection data covering the results of preproduction and periodic production inspections shall be forwarded to the procuring activity.

4.5.1 Dielectric and insulation resistance

4.5.1.1 Connector 801 shall withstand a test potential of 2400 volts 60 Hertz ac between pin M and all mutually insulated pins and between pin M and the connector shell for one minute minimum without breakdown.

4.5.1.2 With the exception of pin M, connector 801 shall withstand a test potential of 1000 volts 60 Hertz ac between each pin and all mutually insulated pins and between each pin and the connector shell for one minute minimum without breakdown.

4.5.1.3 Connectors 802, 803, 804, and 805 shall withstand a test potential of 1000 volts 60 Hertz ac between each pin and all mutually insulated pins and between each pin and the connector shell for one minute minimum without breakdown.

4.5.1.4 The insulation resistance between hi-potted points shall be 30 megohms minimum at 500 volts dc.

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:12Z
Check the source to verify that this is the currentversion before use.

4.5.2 Vibration

4.5.2.1 Mounting. The rear cover, less pack or packaging, shall be mounted to a test fixture as shown in Figure 1 and tested as specified in 4.5.2.2 and 4.5.2.3.

4.5.2.2 Vibration, nonoperating. The rear cover shall be subjected to the "Vibration, nonoperating" test of MIL-E-82590 and thereafter shall meet the requirements of 3.5.1.1.

4.5.2.3 Vibration, operating. The rear cover shall be subjected to the "Vibration, operating" test of MIL-E-82590 and during and thereafter shall meet the requirements of 3.5.1.2.

4.5.2.4 Vibration, transportation. The rear cover shall be subjected to the "Vibration, transportation" test of MIL-E-82590 and thereafter shall meet the requirements of 3.5.1.3.

4.5.3 Shock, transportation. The rear cover shall be subjected to the "Shock, transportation" test of MIL-E-82590 and thereafter shall meet the requirements of 3.5.2.

4.5.4 Temperature and humidity

4.5.4.1 High temperature and humidity, nonoperating. The rear cover shall be subjected to the "High temperature and humidity, nonoperating" test of MIL-E-82590 and thereafter shall meet the requirements of 3.5.3.1.

4.5.4.2 High temperature, operating. The rear cover shall be subjected to the "High temperature, operating" test of MIL-E-82590 and, while at the test temperature, shall meet the requirements of 3.5.3.2.

4.5.4.3 Low temperature, nonoperating. The rear cover shall be subjected to the "Low temperature, nonoperating" test of MIL-E-82590 and thereafter shall meet the requirements of 3.5.3.3.

4.5.4.4 Low temperature, operating. The rear cover shall be subjected to the "Low temperature, operating" test of MIL-E-82590 and, while at the test temperature, shall meet the requirements of 3.5.3.4.

4.6 Waiver of tests. Tests specified in 4.5.2.4 and 4.5.3 above may be waived by the procuring agency for Level C packs only, provided the contractor guarantees safe delivery to the using activity.

4.7 Functional tests. At the conclusion of the tests specified in 4.5.2.4 and 4.5.3 above, functional and other tests, as applicable, shall be conducted on the rear cover to determine freedom from operational malfunction and compliance with all performance requirements and product characteristics of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. The levels of preservation and packaging shall be as specified (see 6.2).

5.1.1 Level A

5.1.1.1 Unit packaging. The rear cover shall be packaged in accordance with Method IIB of MIL-P-116.

5.1.2 Level B. Not applicable.

5.1.3 Level C

5.1.3.1 Unit packaging. The rear cover shall be packaged in accordance with Method III of MIL-P-116.

5.2 Packing. Packing shall be Level A or Level C, as specified (see 6.2).

5.2.1 Level A

5.2.1.1 Consolidation container. The rear cover, packaged as described in 5.1.1.1, shall be packed in a wooden box in accordance with PPP-B-621, Class 2.

5.2.1.2 Palletizing. When specified, Level A packs shall be palletized in accordance with MIL-STD-147, Pattern No. 95 (MS 53101) (see 6.2).

5.2.2 Level C. The rear cover, packaged in accordance with 5.1.3.1, shall be packed to afford protection against damage during shipment from the supply source to the first receiving activity for immediate use. Containers shall comply with common carrier regulations applicable to the mode of transportation.

5.3 Levels A or C cushioning. The unit package shall incorporate sufficient cushioning material, bracing, or other adequate shock absorbing devices to ensure that the rear cover will meet all the requirements of Section 3 after being tested in accordance with paragraph 4.5.2.4 (Vibration) and 4.5.3 (Shock). At the time of packaging or packing, the moisture content of the cushioning material shall be no more than five percent.

5.4 Marking

5.4.1 Special markings. None, unless otherwise specified.

5.4.2 Normal markings. In addition to the markings required by the contract or order, unit packages and shipping containers shall be marked in accordance with the requirements of MIL-STD-129, including serial numbers.

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:12Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The rear cover is intended for use in Torpedo Mk 37 Mods 2 and 3.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Any exceptions to this specification.

(c) Required level of preservation and packaging (see 5.1).

(d) Required level of packing, including palletizing (see 5.2).

(e) Assigned activity for preproduction and periodic production inspections.

(f) Data required other than that specified in 3.2.1.

(g) That additional samples required because of failure of any unit(s) to pass the prescribed periodic production inspections shall be provided and inspected at the expense of the supplier.

(h) Guarantee clause (see 6.3).


6.2.1 The attention of the contracting officer is invited to the options in 4.6.

6.3 Guarantee. The contract or order shall include a requirement for a guarantee stating that any rear cover which fails to meet the requirements of this specification within one year after delivery because of a defect in material or workmanship or because of the vendor's failure to comply with the requirements of the applicable drawings and specifications shall be replaced by the vendor at no cost to the Government.

Preparing Activity
Navy - OS
Project No. 1355-N184

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:12Z
Check the source to verify that this is the currentversion before use.

FIGURE 1. REAR COVER MOUNTING REQUIREMENTS

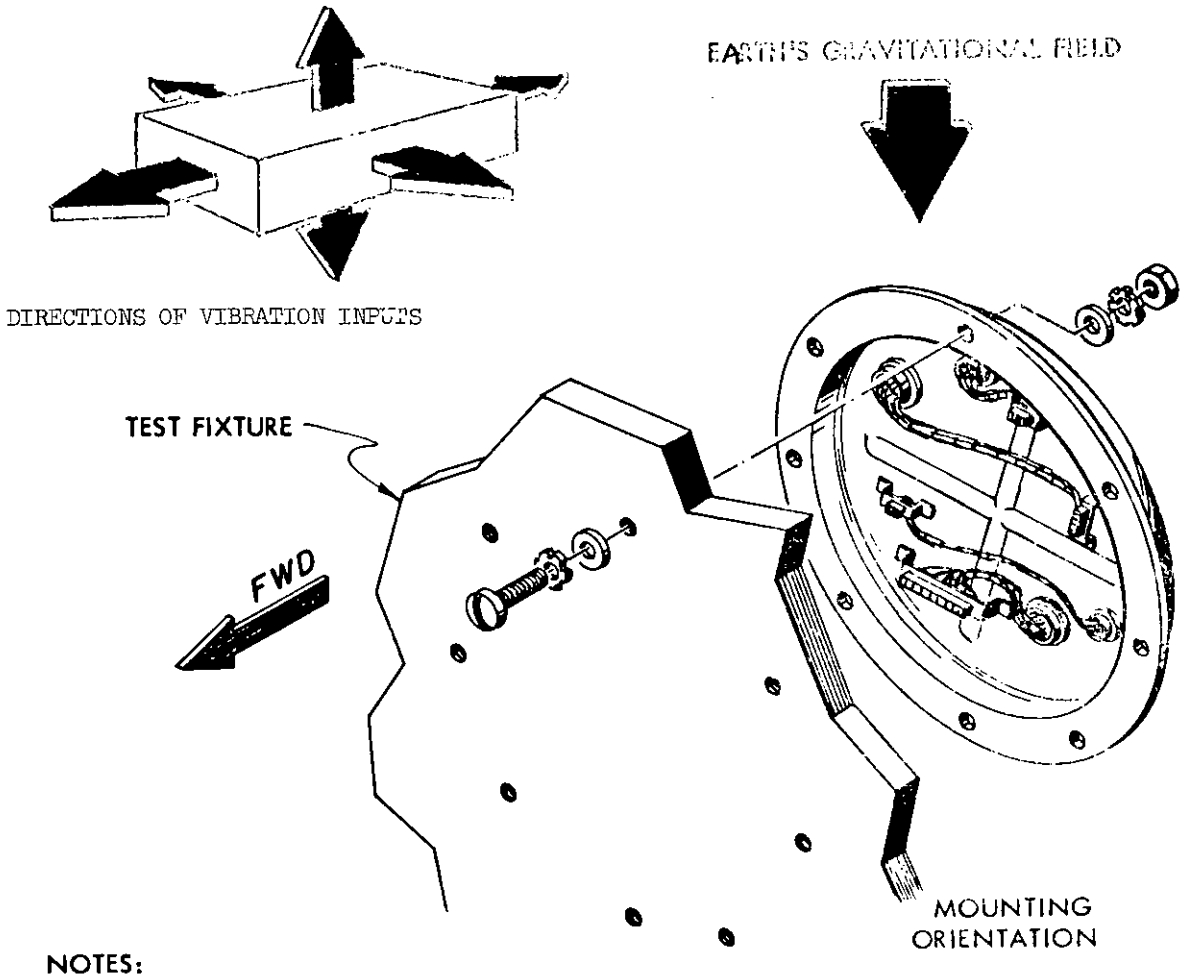

NOTES:

1. FOR VIBRATION, ORIENTATION OF TEST ITEM WITH RESPECT TO EARTH'S GRAVITATIONAL FIELD SHALL BE MAINTAINED FOR ALL TEST DIRECTIONS.
2. FOR VIBRATION, THE TEST ITEM SHALL BE SECURED TO THE TEST FIXTURE AS SHOWN.
3. THE TEST FIXTURE SHALL NOT ALTER THE INPUTS FROM VIBRATION EXCITER TO THE MOUNTING POINTS OF THE TEST ITEM.

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:12Z
Check the source to verify that this is the current version before use.