
MIL-STD-1323-174
(NAVY)

7 MARCH 1986

MILITARY STANDARD

UNIT LOAD FOR UNDERWAY REPLENISHMENT ROCKETS MK 4, MK 40, OR MK 66 AND ROCKET MOTOR MK 66 IN ROCKET LAUNCHERS LAU-61C/A OR LAU-68D/A IN PALLET, LOADING AND STORAGE, MHU-108/E

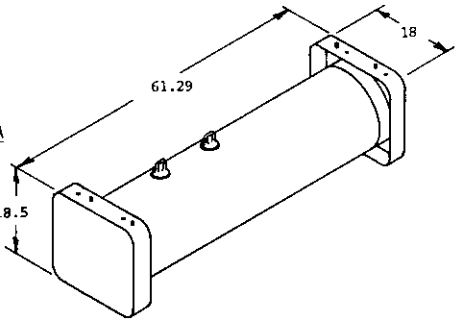

U. S. NAVY PART NO.
67A280J1-LAU-61C/A

UNIT LOAD DATA


	LAU-61C/A	LAU-68D/A
NO. OF LAUNCHERS PER UNIT LOAD	4	9
NO. OF ROCKETS/ROCKET MOTORS PER LAUNCHER	19	7
NO. OF ROCKETS/ROCKET MOTORS PER UNIT LOAD	76	63
GROSS WT. ONE LAUNCHER-MK 4, 40, OR 66 ROCKETS	584 LBS	238.7 LBS
GROSS WT. ONE LAUNCHER-MK 66 ROCKET MOTORS	407.4 LBS	173.6 LBS
WEIGHT OF PALLET AND STRAPPING	317 LBS	317 LBS
GROSS WT. OF UNIT LOAD OF ROCKETS △	2653 LBS	2465 LBS
GROSS WT. OF UNIT LOAD OF ROCKET MOTORS △	1947 LBS	1880 LBS
CUBE	56.1 CU FT	57.3 CU FT

△ DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN
4 UNIT LOADS HIGH IN STORAGE.

HAZARD CLASSIFICATIONS

	ROCKETS	ROCKET MOTORS
DOT	CLASS A	CLASS B
C G	CLASS IV	CLASS II-B

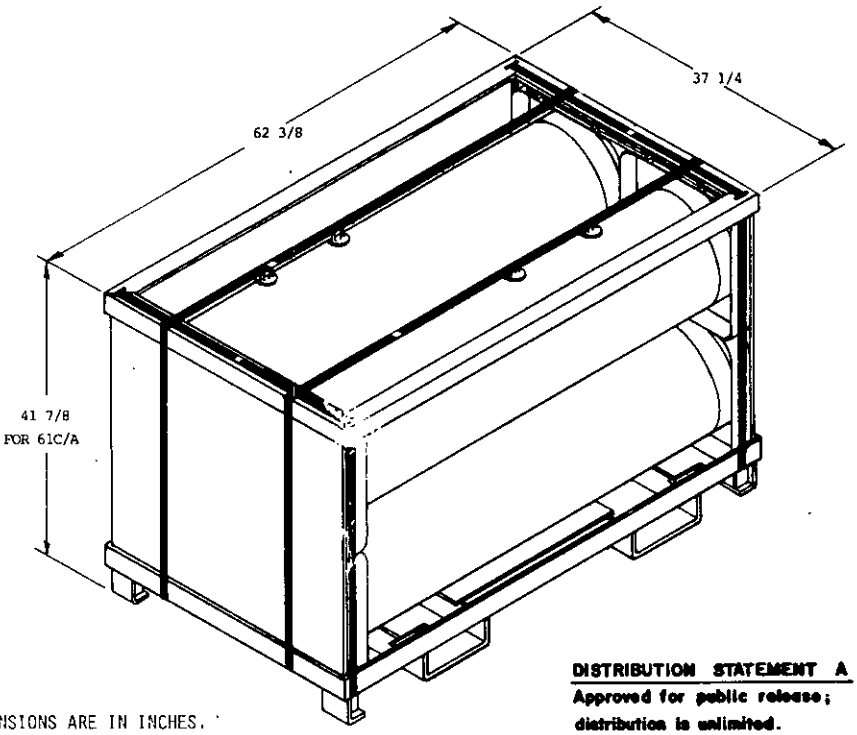

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
Approved for public release; distribution is unlimited.

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

M.S. Gray NWHC 3/6/86
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J C Kelly 3/7/86
SIGNATURE AIRSYSCOM HQ DIRECTION DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY)

ORIGINATOR Charles McBride 3/7/86
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-28T20:59Z
Check the source to verify that this is the current version before use.

LAU-61C/A PALLETIZING PROCEDURE

(A) POSITION TWO LAUNCHERS ON BASE ASSEMBLY, ITEM 1, WITH SHOCKPAN LUGS IN THE APPROPRIATE SLOTS. (LAUCHERS ARE TO BE STAGGERED IN THE FORE AND AFT POSITION AS SHOWN).

(B) POSITION THE SECOND ROW OF LAUNCHERS, ENGAGING THE SHOCKPAN LUGS WITH HOLES IN ADJACENT LAUNCHERS.

(C) POSITION THE END PANEL, ITEM 3, BETWEEN SHOCKPANS AND BASE ASSEMBLY, AS SHOWN.


(D) PLACE THE TOP FRAME, ITEM 2, ON UNIT LOAD ENGAGING SHOCKPAN LUGS WITH APPROPRIATE SLOTS.

(E) POSITION STRAPPING, ITEM 4, THROUGH SLOTS IN BASE ASSEMBLY, OVER SHOCKPANS AND THROUGH SLOTS IN TOP FRAME, TENSION AND DOUBLE NOTCH SEAL, ITEM 6.

(F) POSITION STRAPPING, ITEM 5, UNDER BASE ASSEMBLY AND AROUND THE UNIT LOAD, TENSION AND DOUBLE NOTCH SEAL.

MARKING: IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1323.

NOTE: ROCKETS ARE MADE UP OF ROCKET MOTORS PLUS WARHEADS.

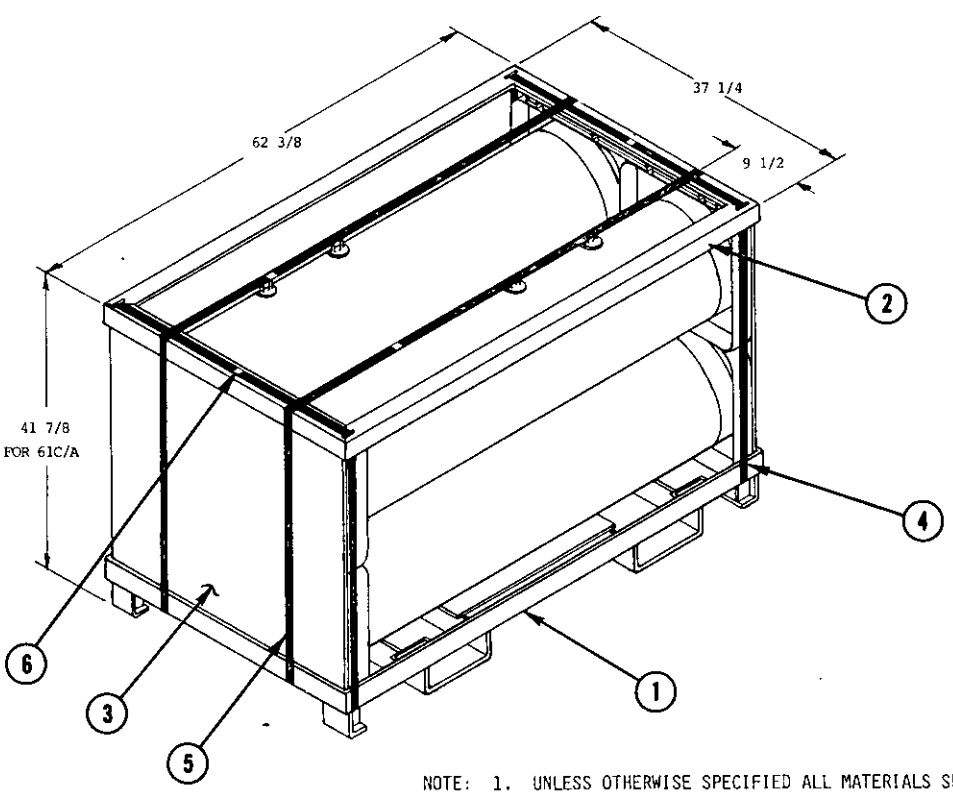

NOTE: 1. UNLESS OTHERWISE SPECIFIED ALL MATERIALS SHALL BE IN ACCORDANCE WITH MIL-STD-1323.

2. DO NOT USE TYPE I STRAPPING WITH POWER MACHINES.

DEPALLETIZING PROCEDURE

(A) CUT AND REMOVE STRAPPING.

(B) REMOVE TOP FRAME.

(C) REMOVE END PANELS.

(D) REMOVE LAUNCHERS.

(E) REMOVE BASE.

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
4	6	SEAL	SEE NOTE 1	FOR 1 1/4 STRAP
2	5	STRAPPING	SEE NOTES 1&2	1 1/4X.035X18FT
2	4	STRAPPING	SEE NOTES 1&2	1 1/4X.035X14FT
2	3	END PANEL	PLYWOOD	1/4X36 1/2X36 1/2
1	2	TOP FRAME	DWG 67A218F3	-
1	1	BASE ASSEMBLY	DWG 67A218F2	-

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:56Z
Check the source to verify that this is the current version before use.

LAU-68D/A PALLETIZING PROCEDURE

(A) POSITION THREE LAUNCHERS ON BASE ASSEMBLY, ITEM 1, WITH SHOCKPAN LUGS IN THE APPROPRIATE SLOTS. (LAUNCHERS ARE TO BE STAGGERED IN THE FORE AND AFT POSITION AS SHOWN).

(B) POSITION THE SECOND AND THIRD ROW OF LAUNCHERS ENGAGING THE SHOCKPAN LUGS WITH HOLES IN ADJACENT LAUNCHERS.


(C) POSITION THE END PANEL, ITEM 3, BETWEEN SHOCKPANS AND BASE ASSEMBLY, AS SHOWN.

(D) PLACE THE TOP FRAME, ITEM 2, ON THE UNIT LOAD.


(E) POSITION STRAPPING, ITEM 4, THROUGH SLOTS IN BASE ASSEMBLY, OVER SHOCKPANS AND THROUGH THE SLOTS IN TOP FRAME, TENSION AND DOUBLE NOTCH SEAL, ITEM 6.

(F) POSITION STRAPPING, ITEM 5, UNDER BASE ASSEMBLY AND AROUND THE UNIT LOAD, TENSION AND DOUBLE NOTCH SEAL.

MARKING: IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1323.

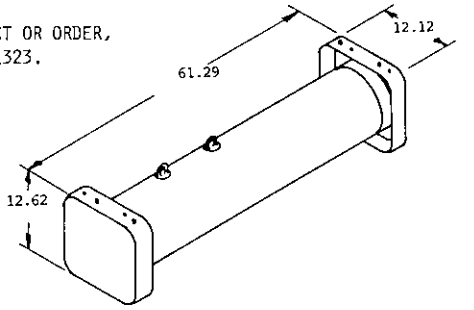

U.S. NAVY PART NO.
67A282J1-LAU-68D/A

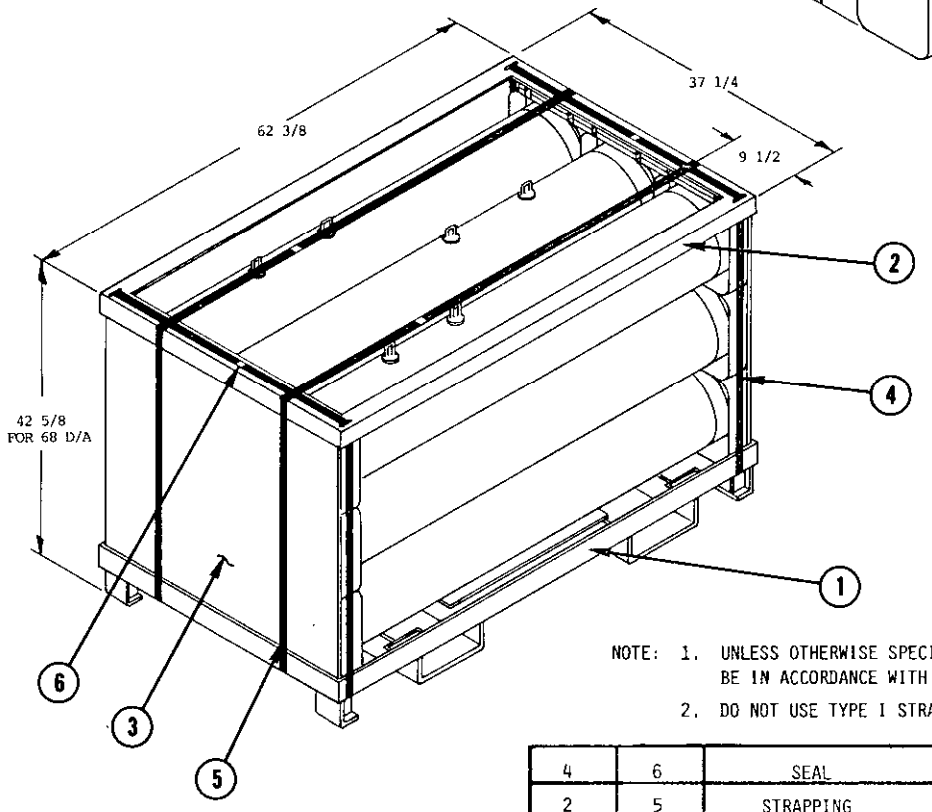

NOTE: 1. UNLESS OTHERWISE SPECIFIED ALL MATERIALS SHALL BE IN ACCORDANCE WITH MIL-STD-1323.

2. DO NOT USE TYPE I STRAPPING WITH POWER MACHINES.

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
4	6	SEAL	SEE NOTE 1	FOR 1 1/4 STRAP
2	5	STRAPPING	SEE NOTES 1 & 2	1 1/4X.035X18FT
2	4	STRAPPING	SEE NOTES 1 & 2	1 1/4X.035X14FT
2	3	END PANEL	PLYWOOD	1/4X36 1/2X37 3/8
1	2	TOP FRAME	DWG 67A218F3	-
1	1	BASE ASSEMBLY	DWG 67A218F2	-

LIST OF MATERIALS

DEPALLETIZING PROCEDURE

(A) CUT AND REMOVE STRAPPING.

(B) REMOVE TOP FRAME.

(C) REMOVE END PANELS.

(D) REMOVE LAUNCHERS.

(E) REMOVE BASE.

REVIEW ACTIVITY:
NAVY-OS, AS

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-N696)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:56Z
Check the source to verify that this is the current version before use.