MILITARY STANDARD

MIL-STD-1323-239A
(NAVY)
11 JANUARY 1988

SUPERSEDING MIL-STD-1323-239
29 JUNE 1984

UNIT LOAD
FOR UNDERWAY REPLENISHMENT
BOMB,GENERAL PURPOSE: 500 LB MK 82 MOD 2 (THERMALLY PROTECTED)
AND BOMB,BDU-45/B, INERT LOADED, (THERMALLY PROTECTED)
ON PALLET, LOADING AND STORAGE
(MHU-122/E, DL 623AS100, AND MHU-122A/E, DL 623AS200)


UNIT LOAD DATA	DODIC/NALC NO.	MK 82 MOD 2 E488	BDU-45/B F019
NUMBER OF BOMBS PER UNIT LOAD		6	
GROSS WEIGHT OF ONE CONTAINER		485 LBS	
WEIGHT OF BOMB PALLET		170 LBS	
WEIGHT OF STEEL STRAPPING		13 LBS	
GROSS WEIGHT OF UNIT LOAD		3,093 LBS	
WEIGHT OF BOTTOM FRAME		108 LBS	
CUBE		36.1 CU FT	

DO NOT USE FOR SHIPPING WEIGHT


DO NOT STACK MORE THAN
6 UNIT LOADS HIGH IN STORAGE

HAZARD CLASSIFICATION (MK 82 MOD 2 ONLY)
DOT..... CLASS A
CG..... CLASS X-A

AMSC NO. - N/A

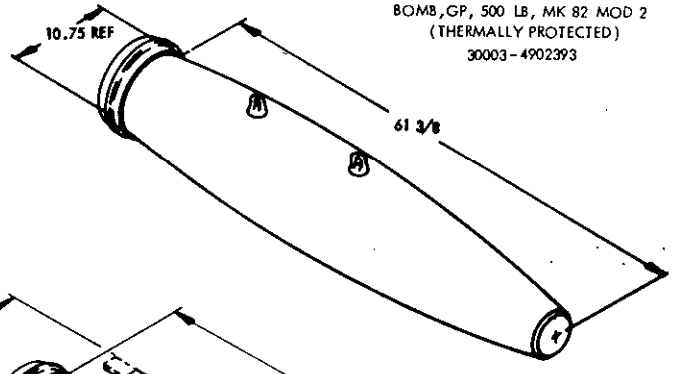

BOMB,GP, 500 LB, MK 82 MOD 2
(THERMALLY PROTECTED)
30003-4902393

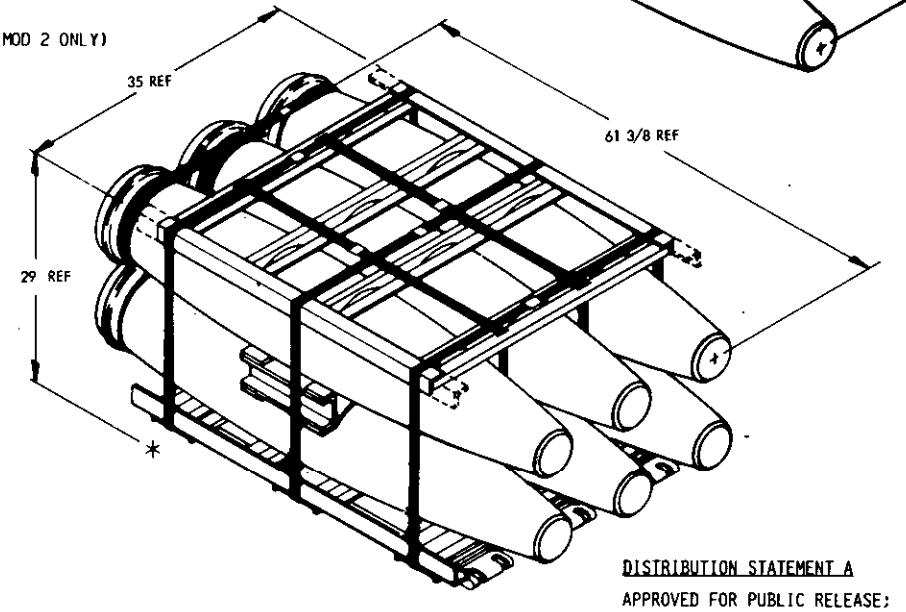

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION IS UNLIMITED

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA APPROVAL	SYSCOM APPROVAL
A	CLARIFIED STRAPPING PROCEDURE	1-11-88	CR	JEH
MIL-STD	ADDED EXTRA TAIL STRAP, ITEM 6, TO PREVENT ROTATION OF OUT OF TOLERANCE BOMBS			

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING STORAGE AND TRANSFER-AT SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

M S Gray NWHC 6/28/84
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J E Kelly 6/29/84
SIGNATURE AIR SYSCOM, BY DIRECTION DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).

ORIGINATOR Charles McBride 6/29/84
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:57Z
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE

(A) POSITION THE LONGITUDINAL STRAPPING, ITEM 4, UNDER THE NOTCHED SECTIONS OF THE BOTTOM FRAME.

(B) PLACE THREE BOMBS ON THE BOTTOM FRAME, ITEM 1, WITH THE FORWARD END OF THE BOMBS ON THE FORWARD END OF THE FRAME. ASCERTAIN THE PROPER ALIGNMENT OF THE SUSPENSION LUGS. THE LONGITUDINAL AXIS OF THE LUGS SHOULD BE PARALLEL TO THE LONGITUDINAL AXIS OF THE BOMB. WITH THE LUGS IN THIS POSITION, THEY WILL FIT ON THE OUTSIDE OF THE CENTER HAT SECTIONS AND THE BOMBS MUST BE TURNED SO THAT THE LUGS WILL BE IN THE 5 OR 7 O'CLOCK POSITION. SEE SECTION A-A AND VIEW B-B.

(C) POSITION THE INTERMEDIATE FRAME, ITEM 2, ON THE FIRST ROW OF BOMBS, VERTICAL TO THE CENTER HAT SECTIONS OF THE BOTTOM FRAME. SEE VIEW B-B.

(D) POSITION THE SECOND ROW OF BOMBS ON THE INTERMEDIATE FRAME, WITH SUSPENSION LUGS DOWN AND IN THE SAME POSITION AS THE FIRST ROW. SEE SECTION A-A AND VIEW B-B.

(E) POSITION THE TOP FRAME, ITEM 3, WITH THE FORWARD END OF THE FRAME IN THE SAME DIRECTION AS THE FORWARD END OF THE BOMBS.


(F) POSITION THE LONGITUDINAL STRAPPING, ITEM 4, BETWEEN THE ENDS OF THE BOMBS AND THROUGH THE SLOTS IN THE TOP FRAME, TENSION, AND DOUBLE NOTCH THE SEAL, ITEM 7.

(G) POSITION STRAPPING, ITEM 5, UNDER THE CHANNELS ON THE BOTTOM FRAME (SEE DETAIL A) AND AROUND THE UNIT LOAD, TENSION AND DOUBLE NOTCH SEAL.

(H) THREAD STRAPPING, ITEM 6, AROUND OUTBOARD BOMBS, WEAVING AROUND AND OVER THE TOP OF THE CENTER BOMB AS SHOWN IN SECTION A-A AND DETAIL B. STRAPPING TO BE ADJACENT TO THE SHIPPING CAPS.

MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1323.

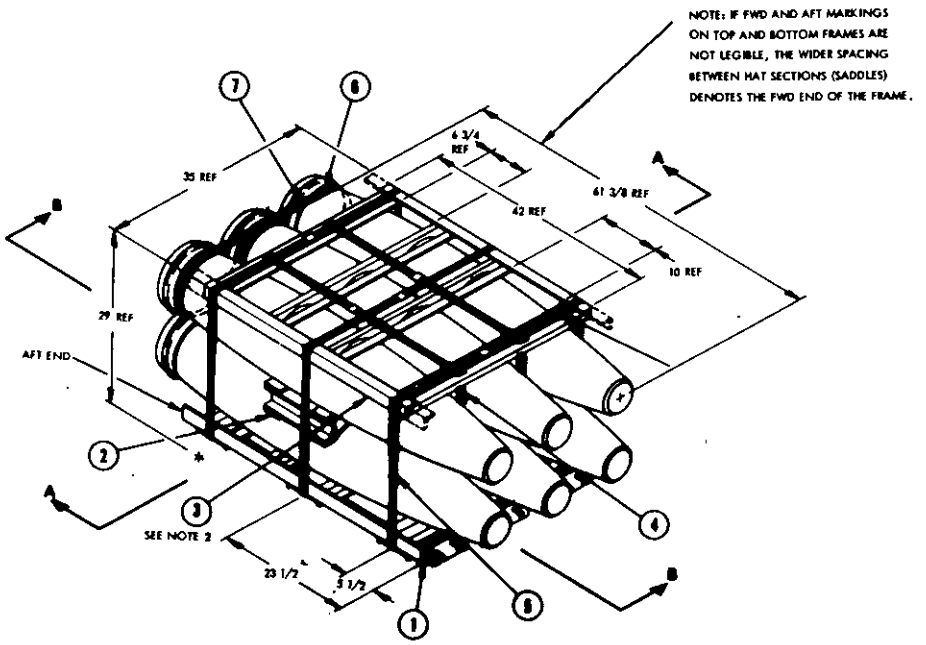

NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL MATERIAL SHALL BE IN ACCORDANCE WITH MIL-STD-1323.
2. EARLY PRODUCTION TOP FRAMES, ITEM 3, HAVE EXTENDED ANGLES (46-3/4 LONG) AS SHOWN IN PHANTOM.
3. DO NOT USE TYPE 1 STRAPPING WITH POWER MACHINE.


REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
6	7	SEAL	SEE NOTE 1	1 1/4
1	6	STRAPPING	SEE NOTES 1 & 3	1 1/4 X .035 X 9 FT
3	5	STRAPPING	SEE NOTES 1 & 3	1 1/4 X .035 X 11 FT 6
2	4	STRAPPING	SEE NOTES 1 & 3	1 1/4 X .035 X 12 FT 6
1	3	FRAME, TOP PALLET MHU-122/E	STEEL, 623AS101	SEE NOTE 2
1	2	FRAME, INTERMEDIATE PALLET, MHU-122/E	STEEL, 623AS 102	
1	1	FRAME, BOTTOM PALLET MHU-122/E	STEEL, 623 AS 103	

LIST OF MATERIALS


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:57Z
Check the source to verify that this is the current version before use.

DEPALLETIZING PROCEDURES


(A) CUT AND REMOVE STRAPPING.
(B) REMOVE THE TOP FRAME.
(C) REMOVE THE TOP ROW OF BOMBS.
(D) REMOVE THE INTERMEDIATE FRAME.
(E) REMOVE THE BOTTOM ROW OF BOMBS.
(F) POSITION THE INTERMEDIATE AND THE TOP FRAMES ON THE BOTTOM FRAME.

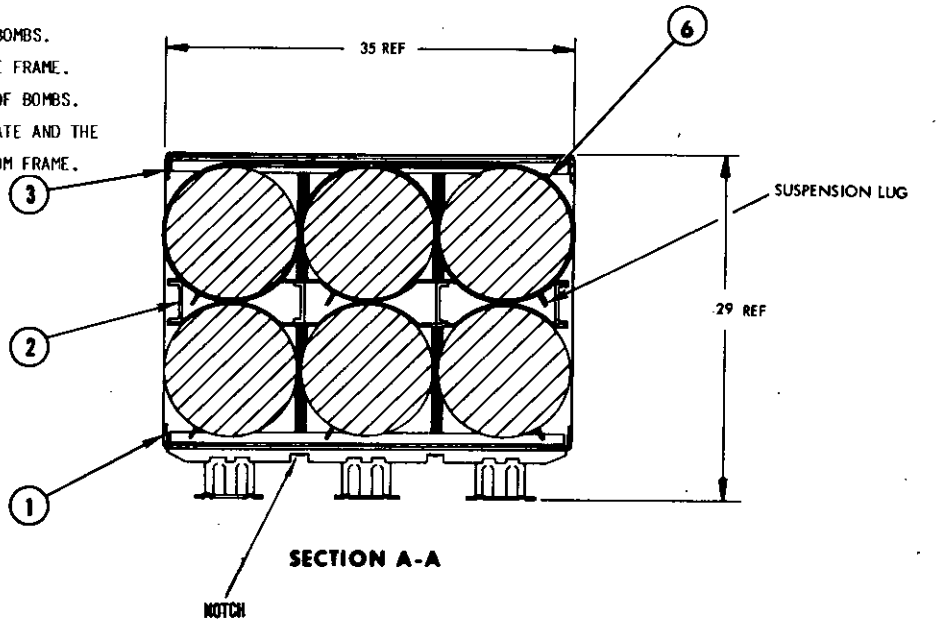


SECTION A-A



DETAIL A



DETAIL B

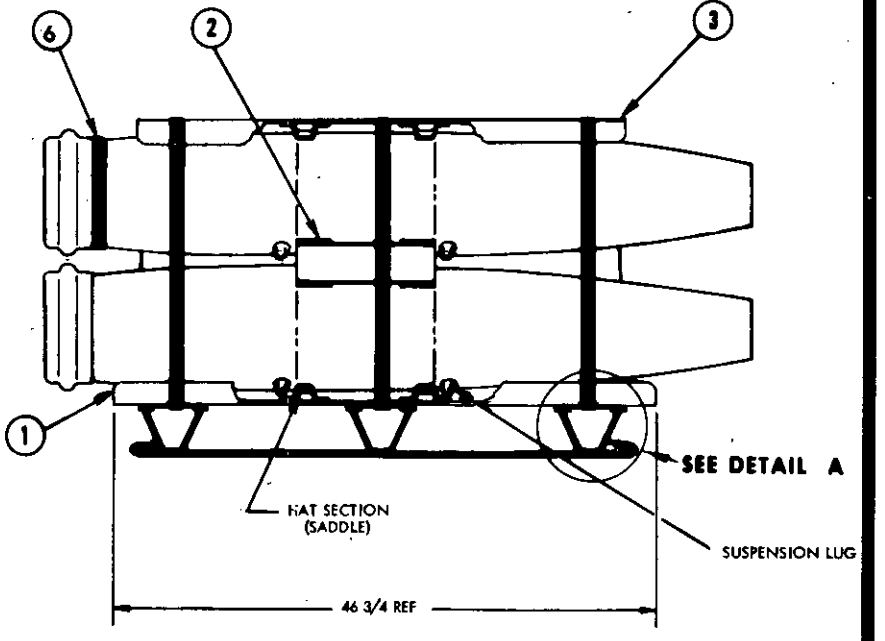

VIEW B-B

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:57Z
Check the source to verify that this is the current version before use.