INCH-POUND

MIL-PRF-22684E
AMENDMENT 1
11 October 2000

PERFORMANCE SPECIFICATION

RESISTORS, FIXED, FILM (INSULATED),
GENERAL SPECIFICATION FOR

This amendment forms a part of MIL-PRF-22684E, dated 24 September 1999, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

1.2.1, 1.2.1.1, 1.2.1.2, 1.2.1.3, 1.2.1.4, and Table I; delete and substitute the following:

"1.2.1 Part or Identifying Number (PIN). Resistors specified herein are identified by the PIN which consist of the basic number, associated specification, and a coded dash number.

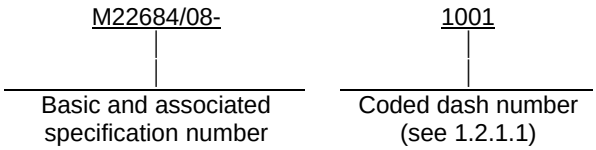

1.2.1.1 Coded dash number. The coded dash number is a coded value which identifies the resistance value, resistance tolerance, and the terminal (see 3.1)."

PAGE 18

After 6.2.1 add, 6.2.2, 6.2.2.1, 6.2.2.2, 6.2.2.3, and 6.2.2.4.

"6.2.2 Type designation. The type designation for identifying these parts is as follows:

NOTE: This is for information only. For the correct PIN, see 3.1.

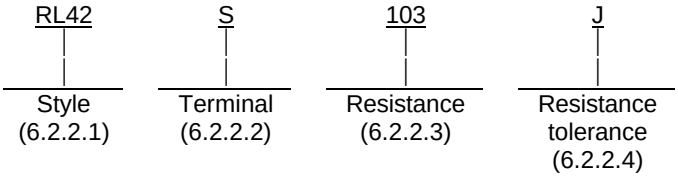

6.2.2.1 Style. The style is identified by the two letter symbol "RL" followed by a two digit number; the letters identify insulated, film, fixed resistors, and the number identifies the sizes and power rating of the resistors.

6.2.2.2 Terminal. The terminal is identified by the single letter "S" indicating solderable.

6.2.2.3 Resistance. The nominal resistance value expressed in ohms is identified by a three digit number; the first two digits represent significant figures and the last digit specifies the number of zeros to follow. Minimum and maximum resistance values are as specified (see 3.1). The standard value for every decade follows the sequence demonstrated for the "10 to 100" decade.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:22Z
Check the source to verify that this is the current version before use.

6.2.2.4 Resistance tolerance. The resistance tolerance is identified by a single letter in accordance with table VII-1.

"TABLE VII-1. Resistance tolerance.

Symbol	Resistance tolerance Percent (±)
G	2
J	5

"

Table VIII, delete and substitute.

"TABLE VIII. Critical resistance value for qualification inspection. 1/

Style	Critical resistance value 2/ (Megohms)
RL07	0.240
RL20	0.240
RL32	0.240
RL42	0.120

1/ Maximum continuous working voltage shall be applied (see 3.1).
2/ The critical resistance value is the maximum standard resistance value which will dissipate full wattage when the maximum continuous working voltage is applied."

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AR, AT, AV, CR4, MI
Navy - AS, CG, MC, OS
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5905-1595)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:22Z
Check the source to verify that this is the current version before use.