MILITARY SPECIFICATION SHEET

AMPLIFIER, AUDIO FREQUENCY, AM 7067A/A (A)

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the unit described herein shall consist of this document and the latest issue of specification MIL-A-23595(AS).

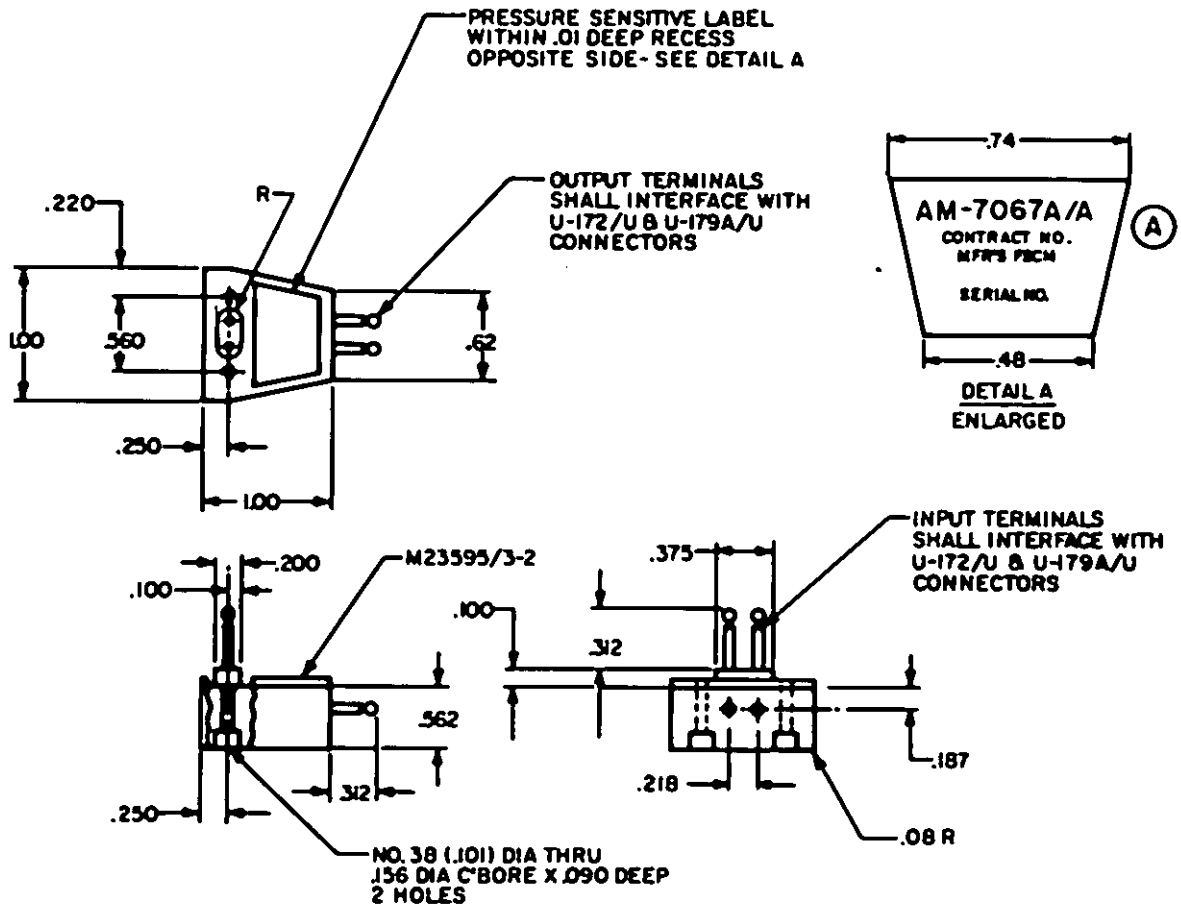


FIGURE 1. Amplifier AM-7067A/A P/N M23595/3-1. (A)

AMSC N/A FSC 5831

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:20Z
Check the source to verify that this is the current version before use.

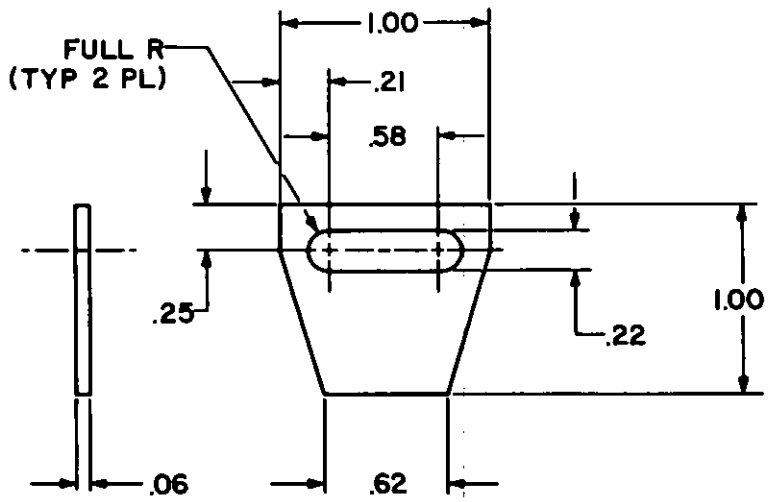


FIGURE 2. Gasket P/N M23595/3-2.

REQUIREMENTS:

1. The amplifier P/N M23595/3-1 shall be supplied with the following:

   1 M23595/3-2 Gasket
   2 MS35275-210 Screw, Machine, Fillister Head (2-56 x 7/8 Lg)

2. The gasket shall be silicone rubber commercial grade.

3. The output terminal shall be capable of supporting X pounds when tested in accordance with Figure X and show no evidence of cracking or deformation and shall pass all electrical tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:20Z
Check the source to verify that this is the current version before use.

NOTES:

1. When connected to grounded source or measuring system, the red dot denotes the common lead.
2. Do not ground connections to the input and output at the same time.
3. All dimensions are in inches.
4. Tolerances are two place ±.02 three place ±.005.

Preparing Activity:
Navy - AS
Project No. 5831-N052-2

☆U.S. GOVERNMENT PRINTING OFFICE: 1988 — 704-036/45394

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:20Z
Check the source to verify that this is the current version before use.