MIL-A-83406B(USAF)
AMENDMENT 2
20 October 1978
SUPERSEDING
AMENDMENT 1
27 July 1976

MILITARY SPECIFICATION

ANTI-G GARMENT, CUTAWAY, CSU-13B/P

This amendment forms a part of Military Specification MIL-A-83406B(USAF) dated 3 September 1975.

* Page 1, paragraph 2.1: Delete "MIL-C-43600 Cloth, Twill, Nylon, High Temperature Resistant" and "MIL-T-43115 Tape, Pressure-Sensitive, Adhesive, for Packaging and Sealing". Add "MIL-T-22085 Tapes, Adhesive, Preservation and Sealing", "MIL-C-83429 Cloth, Plain and Basket Weave, Aromatic Polyamide, Non-Melting", "MIL-C-83489 Cloth, Coated, Nylon, Polyurethane Coated", and "FED-STD-595 Colors".

Page 3, paragraph 3.4.1.1, second line: Delete "MIL-C-43600" and substitute "MIL-C-83429".

* Pages 3 and 4, paragraph 3.4.1.2, table I, and table II: Delete and substitute:

"3.4.1.2 Polyurethane coated nylon cloth. The material for the bladder (including the attachment patches) shall conform to type I of MIL-C-83489."

* Page 5, paragraph 3.4.4, first and second lines: Delete "3/32 inch (plus or minus 1/64 inch) thick and shall be" and substitute "0.0800 to 0.1200 inch thick and shall be Style No. PDH 60498 (manufactured by Chicopee Manufacturing Co., Cornelia, Georgia),".

Page 5, paragraph 3.4.6: Before the third last sentence add "The tape of the slide fasteners shall have colorfastness in accordance with V-F-106 except that fair colorfastness in lieu of good colorfastness to light will be acceptable."

Page 7, paragraph 3.4.13, second line: Delete "color of the tape" and substitute "sleeve may have 16 carriers in lieu of 20 carriers, the length shall be 39-1/2 inches in lieu of 45 inches for each yard of webbing, and the color".

* Page 8, paragraph 3.4.22, second line: Delete "opening shall" and substitute "opening and for the knife pocket reinforcement shall".

* Page 9, paragraph 3.4.25, second line: Delete "MIL-T-43115" and substitute "type II of MIL-T-22085".

FSC 8475


Source: https://assist.dla.mil -- Downloaded: 202640-23T08:00Z
Check the source to verify that this is the current version before use.

Page 9: Add:

"3.4.26 Rubber band. The rubber band (see figure 6) shall be 3/4 inch (plus or minus 1/32 inch) inside diameter, 1-1/4 inches (plus or minus 1/16 inch) long, and 0.035 inch (minimum) thickness. The color of the rubber band shall be black that conforms to 27040, 37038, or 37056 of FED-STD-595 or shall be green that conforms to 34096, 34097, or 34128 of FED-STD-595. The rubber shall comply with class 2, type A of MIL-R-6855."

Page 9, paragraph 3.6.1: Add "Thread ends of all stitching inside and outside of the anti-g garment shall be trimmed flush with the fabric."

Pages 11 and 12; table VI; No. 5(c), 6(c), and 6(f); second column: Add "Before completing the stitching of the binding at the top and the bottom of each lacer cover, fold the raw edges of each end of the binding (two ends per lacer cover) so that no raw edges are exposed (see the turned-under binding in the sketch below), and complete the stitching of the binding to the fastener tape."

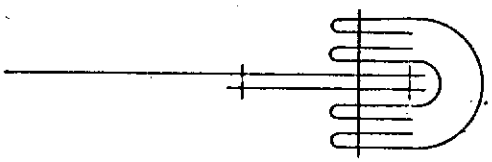

Page 12, table VI, No. 7(b), second column: Delete "the body" in the first line and substitute "the outside body".

Page 12, table VI, second column, between No. 7(b) and 7(c): Add:

"Note: The terms front body bladder cover, front body bladder case, outside cover, and forward cover as indicated in this specification and on the pattern drawings of the bladder cover shall be interpreted as that portion of the bladder cover on the outside (away from the wearer's body) and has a truncated section cut off. The term back body bladder cover or case shall be interpreted as the cover positioned next to the wearer's body and is full size as indicated on the pattern drawings."

Page 18, table VI, No. 14: Add:

"(g) Cut four, 2-3/4-inch squares of the basic fabric to reinforce the slide fasteners. Turn the outside edges of each reinforcement under 1/4 inch on all four sides, and stitch two reinforcements to

Source: https://assist.dla.mil -- Downloaded: 202640-23T08:00Z
Check the source to verify that this is the current version before use.

each pocket with an "X" stitch inside a box. The reinforcements shall be positioned so that a reinforcement will be adjacent to each end of the metal portion of the slide fastener (centered from the top and the bottom on the inside of the pocket). Use stitch type 301, seam type LSa-1, and 10-12 stitches per inch."

* Pages 20, 27 and 28; table VI; No. 18(d) and 27(a); second column: Add "Bartack both ends of each lacer loop, across the full width of the lacer loop including the loop material, 3/8 inch from the top and the bottom edges. Use stitch type bartack and 21-22 stitches per bartack."

Page 23, table VI, No. 22(b), second column, last line: Delete "inside" and substitute "outside".

Pages 23 and 26; table VI; No. 22(d), 23(n), and 23(o); second column; third line: Delete "1/16 inch" and substitute "1/8 inch".

* Pages 24 and 25, table VI, between No. 23(d) and 23(e): Add:

"Place the leather reinforcement piece on the outside of the knife pocket, flat and smooth, with the bottom edge resting on the center notch on the knife pocket and the top edge toward the round end of the knife pocket. Stitch the leather reinforcement piece 1/8 inch (plus or minus 1/16 inch) from the edge on all four sides. Double stitch across the top of the leather reinforcement piece with 1/4-inch gage. Use stitch type 301, seam and stitching type SSa-1, and 10-12 stitches per inch."

Page 25, table VI, No. 23(e), third sentence: Delete and substitute "The leather reinforcement piece shall be on the outside after binding."

* Pages 25 and 26, table VI, No. 23(i), second column: Delete "1/4-inch" in the second sentence and substitute "1/8-inch". Delete "(pocket width) shall be a minimum of 1-3/4 inches" in the last sentence and substitute "shall be 2-1/4 inches (plus or minus 1/8 inch)".


Page 31, table VI, No. 37: Add:

"(b) Attach the rubber sleeve to the connector as shown in figure 6."

Source: https://assist.dla.mil -- Downloaded: 202640-23T08:00Z
Check the source to verify that this is the current version before use.

* Pages 35 and 36, paragraph 3.6.2: Delete "taffeta" in the second and fourteenth lines. Delete "bladder, and 1/16 inch from each side of the seam tape" in the fifteenth sentence and substitute "bladder to the outside edge of the bond, and 1/16 inch from the folded edge of the seam tape (see sketch underneath this paragraph)". Delete the twenty-first and the twenty-second sentences. Underneath the last line insert the sketch below.

DIMENSIONS IN INCHES

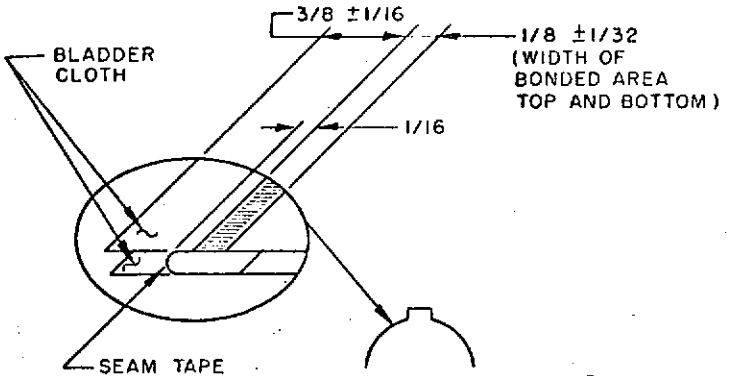

Page 37, paragraph 3.8, thirteenth line: Delete "circumference straight" and substitute "circumference, with the thigh take-up slide fasteners closed for the minimum finished measurement and with the thigh take-up slide fastener open for the maximum finished measurement, straight".

* Page 40, paragraph 3.11.1, fourth line: Delete "clot" and substitute "cloth".

* Page 41, paragraphs 4.4 and 4.5, last sentence: Delete.

* Page 41, paragraph 4.4.1: Delete "one" in the third line and substitute "and one". Delete "long, 1 linear yard of uncoated nylon taffeta cloth, and 1 linear yard of polyurethane coated nylon taffeta cloth" in the fourth and fifth lines.

* Page 42, tables X and XI: Delete.

* Page 43, paragraph 4.5.1.1: Delete "long," in the second line and substitute "long and". Delete "long, 1 linear yard of uncoated nylon taffeta cloth and 1 linear yard of polyurethane coated nylon taffeta cloth" in the third and the fourth lines and substitute "long".

* Pages 44 and 52, paragraphs 4.6.4, 4.7.9, 4.7.9.1, and 4.7.9.2: Delete.

Page 47, table XIII, between eighth and ninth defects: Add "Thread ends not trimmed flush with fabric" in the first column. Add an "X" opposite this defect in the third column.

Source: https://assist.dla.mil -- Downloaded: 202640-23T08:00Z
Check the source to verify that this is the current version before use.

* Page 47, table XIII, last defect: Delete "Width of inside opening of knife pocket (distance between longitudinal stitch lines) less than 1-3/4 inches" and substitute "Distance between inside longitudinal stitch lines attaching knife pocket to reinforcement patch greater than 2-3/8 inches or less than 2-1/8 inches."

Page 48, table XIII, sixth defect: Delete "Run-offs" in the first column and substitute "Run-off".

Page 63, figure 6: Delete "BLACK OR OLIVE GREEN RUBBER BAND (3/4 ID X 1-1/4 LG" and substitute "RUBBER BAND (SEE 3.4.26)".

Note: The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in the notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Air Force - 11

Reviewer:
Air Force - 99

Preparing activity:
Air Force - 11

Project No. 8475-F115

Source: https://assist.dla.mil -- Downloaded: 202640-23T08:00Z
Check the source to verify that this is the current version before use.