
MIL-C-83413/1
23 March 1984
SUPERSEDING
MS3493B
22 September 1977
MS27574B
4 February 1972


MILITARY SPECIFICATION SHEET

CONNECTORS AND ASSEMBLIES, ELECTRICAL, AIRCRAFT
GROUNDING: TYPE I GROUNDING ASSEMBLY, DISCHARGER, ELECTROSTATIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the assembly described herein shall consist of this specification and the latest issue of MIL-C-83413.

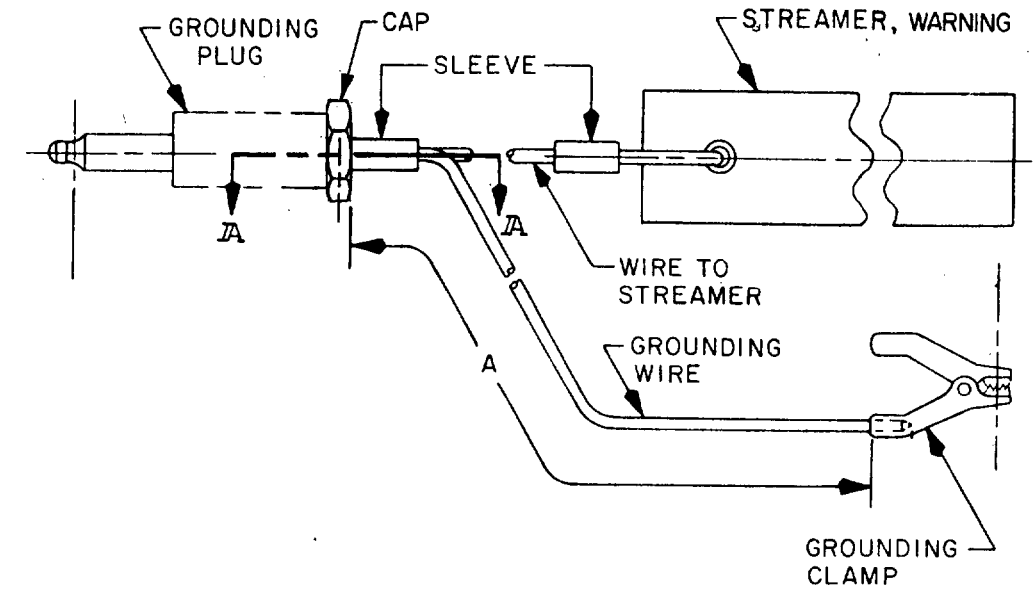

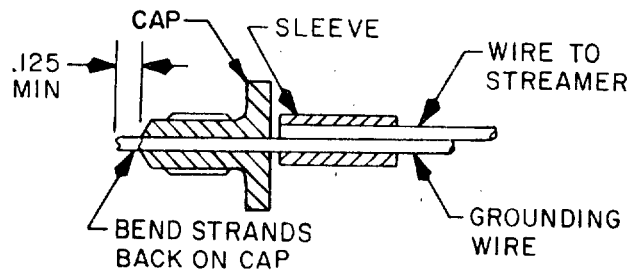

SECTION A-A
WITH PLUG REMOVED

FIGURE 1. Type I grounding assembly.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T08:01Z
Check the source to verify that this is the current version before use.
FSC 5920

REQUIREMENTS:

Grounding plug: Per MIL-C-83413/4.

Grounding wire: 7 X 7 wire per MIL-W-83420, type II, composition B, jacket color international orange in accordance with FED-STD-595.

Grounding clamp: Per MIL-C-83413/7.


Sleeves: Shall be manufactured from MS20659 terminals.

Warning streamers: Shall be per MS51700-36, and shall be attached securely near the plug. See figure 1.

Splices: Shall not be used.

Assembly resistance: Resistance of the grounding assembly shall not exceed 505 +(6XA) milliohms.

Part number:

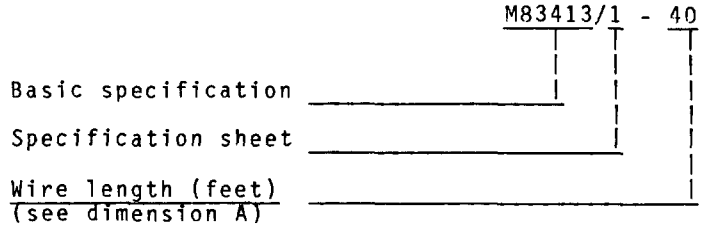

Wire length shall be 10, 20, or 40 feet ±1 foot.

Custodians:
Army - AV
Navy - AS
Air Force - 11

Review activities:
Army - ME, AR, CR, MI
Air Force - 13, 18, 82, 85, 90, 99
DLA - ES

User activity:
Navy - MC

Agent:
DLA - ES

Preparing activity:
Air Force - 11

(Project 5920-0408-1)

☆U.S. GOVERNMENT PRINTING OFFICE: 1984 — 706-040/A2184

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:01Z
Check the source to verify that this is the current version before use.