MIL-C-83413/2
23 March 1984
SUPERSEDING
MS3493B
22 September 1977
MS27574B
4 February 1972

MILITARY SPECIFICATION SHEET

CONNECTORS AND ASSEMBLIES, ELECTRICAL, AIRCRAFT GROUNDING: TYPE II GROUNDING ASSEMBLY, DISCHARGER, ELECTROSTATIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the assembly described herein shall consist of this specification and the latest issue of MIL-C-83413.

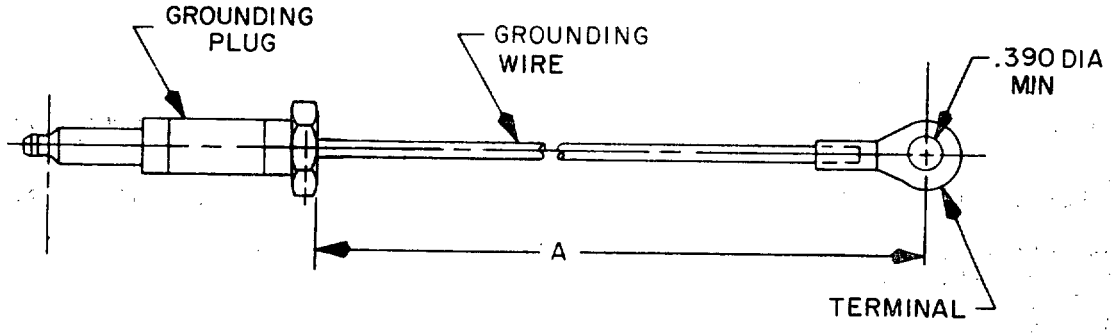

FIGURE 1. Type II grounding assembly.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Grounding plug: Per MIL-C-83413/4.

Grounding wire: 7 X 7 wire per MIL-W-83420, type II, composition B, jacket color international orange in accordance with FED-STD-595.

Terminal: Per MS20659. Terminal shall accommodate .375 stud.

Splices: Shall not be used.

Assembly resistance: Resistance of the grounding assembly shall not exceed 5 +(6XA) milliohms.

Part number:

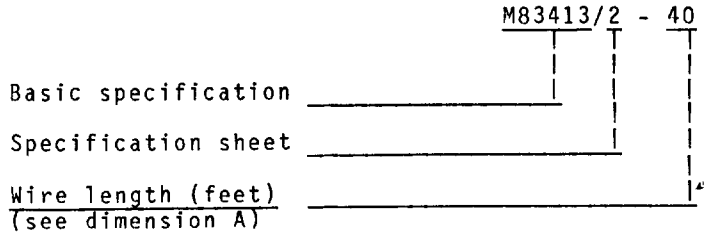

Wire length shall be 10, 20, or 40 feet ±1 foot.

Custodians:
Army - AV
Navy - AS
Air Force - 11

Review activities:
Army - ME, AR, CR, MI
Air Force - 13, 18, 82, 85, 90, 99
DLA - ES

User activity:
Navy - MC

Agent:
DLA - ES

Preparing activity:
Air Force - 11

(Project 5920-0408-2)

☆U.S. GOVERNMENT PRINTING OFFICE: 1984 — 706-040/A2185

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:01Z
Check the source to verify that this is the current version before use.