MILITARY SPECIFICATION SHEET

CONNECTORS AND ASSEMBLIES, ELECTRICAL, AIRCRAFT GROUNDING: TYPE III GROUNDING ASSEMBLY, DISCHARGER, ELECTROSTATIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the assembly described herein shall consist of this specification and the latest issue of MIL-C-83413.

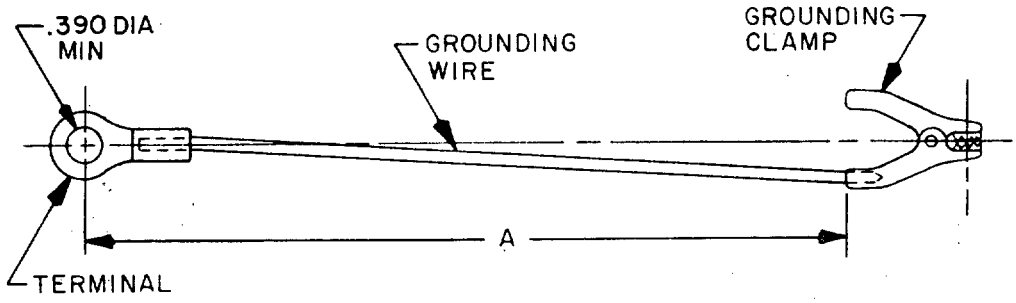

FIGURE 1. Type III grounding assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Grounding wire: 7 X 7 wire per MIL-W-83420, type II, composition B, jacket color international orange in accordance with FED-STD-595.

Grounding clamp: Per MIL-C-83413/7.

Terminals: Per MS20659. Terminal shall accommodate .375 stud.

Splices: Shall not be used.

Assembly resistance: Resistance of the grounding assembly shall not exceed 500 +(6XA) milliohms.

Part number:

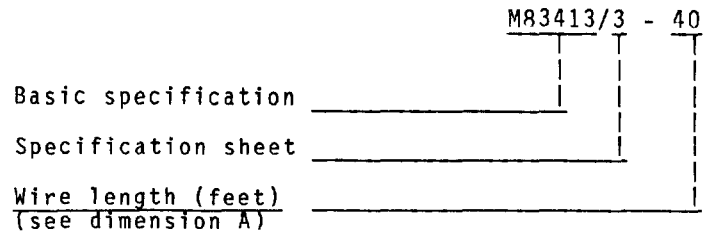

Wire length shall be 10, 20, or 40 feet ±1 foot.

Custodians:
Army - AV
Navy - AS
Air Force - 11

Review activities:
Army - ME, AR, CR, MI
Air Force - 13, 18, 82, 85, 90, 99
DLA - ES

User activity:
Navy - MC

Agent:
DLA - ES

Preparing activity:
Air Force - 11

(Project 5920-0408-3)

☆U.S. GOVERNMENT PRINTING OFFICE: 1984 — 705-040/A2186

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:01Z
Check the source to verify that this is the current version before use.