INCH - POUND

MIL-DTL-83413/5A
30 November 2006
SUPERSEDING
MIL-C-83413/5
12 October 1983


DETAIL SPECIFICATION SHEET

CONNECTORS AND ASSEMBLIES, ELECTRICAL, AIRCRAFT GROUNDING: RECEPTACLES, ONE PIECE

Inactive for new design after 01 January 1984. For new design use MIL-DTL-83413/6.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83413.

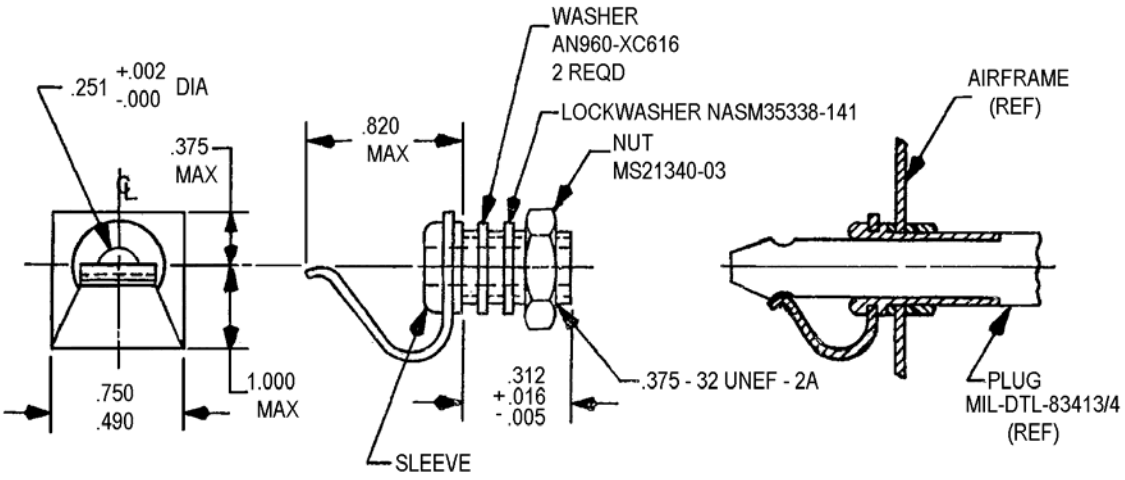

Inches	mm	Inches	mm
.001	0.03	.375	9.53
.002	0.05	.490	12.45
.005	0.13	.750	19.05
.016	0.41	.820	20.83
.251	6.38	1.000	25.40
.312	7.92		

FIGURE 1. Grounding receptacle, one-piece.

AMSC N/A FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:01Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ± .016 (.41mm) for decimals and ± 0.5° for angles.
4. Where only maximum dimensions are shown, the receptacle need not have the shape shown, but the receptacle including all protrusions shall be contained within maximum outline shown.

FIGURE 1. Grounding receptacle, one-piece – Continued.

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2.

Material:
Sleeve: Brass in accordance with ASTM-B36/B36M.
Contact: Phosphor bronze in accordance with ASTM-B139/B139M.

Finish: Cadmium plate in accordance with SAE-AMS-QQ-P-416, type II, class 2, or aluminum coating or plating.

Threads: In accordance with FED-STD-H28.

Detent action: Shall be provided for the mating plug.

Torque: In addition to meeting the requirements of MIL-DTL-83413, the receptacle shall be held fixed while the sleeve is subjected to 20 inch-pounds of torque. The sleeve shall not turn-in, or break loose from the contact, nor shall the contact be deformed.

Durability: In accordance with MIL-DTL-83413, except that the withdrawal force required to clear the detent shall be no less than 8 pounds nor more than 14 pounds.

Contact resistance: Test current 10 ± 1 ampere, millivolts drop 50 maximum.

Altitude-low temperature: Not applicable.

Fluid immersion: Not applicable.


Mating plug: In accordance with MIL-DTL-83413/4.

Part or Identifying Number (PIN): M83413/5-1.

Qualification: Required. The activity responsible for qualification and the Qualification Products List (QPL) for this specification sheet is the Defense Supply Center Columbus, DSCC-VQ, 3990 East Broad Street, Columbus, Ohio 43213-1199.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:01Z
Check the source to verify that this is the current version before use.

Example of PIN: M83413/5-1

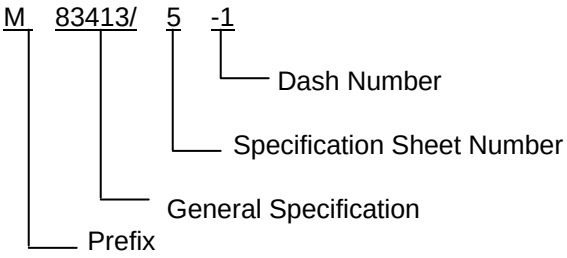

Certain provisions of this specification sheet are the subject of International Standardization Agreement NATO STANAG 3632. When amendment, revision or cancellation of this specification sheet is proposed that will modify the international agreement concerned, the preparing activity will take appropriate action through international agreement standardization channels, including departmental standardization offices to change the agreement or make other appropriate accommodations.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-83413, this document references the following:

MIL-DTL-83413/4
MIL-DTL-83413/6
FED-STD-H28
SAE-AMS-QQ-P-416
ASTM-B139/B139M
ASTM-B36/B36M
NATO STANAG 3632

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:01Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy – AS
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army - AR, CR, CR4, MI
Navy - MC
Air Force – 02, 99

(Project 5935-2005-057)

International interest:
NATO STANAG 3632

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:01Z
Check the source to verify that this is the current version before use.