
MILITARY SPECIFICATION SHEET


CONNECTORS AND ASSEMBLIES, ELECTRICAL, AIRCRAFT
GROUNDING: RECEPTACLES, TWO PIECE, WITH INSERTS AND HOUSINGS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the receptacles described herein shall consist of this specification and the latest issue of MIL-C-83413.

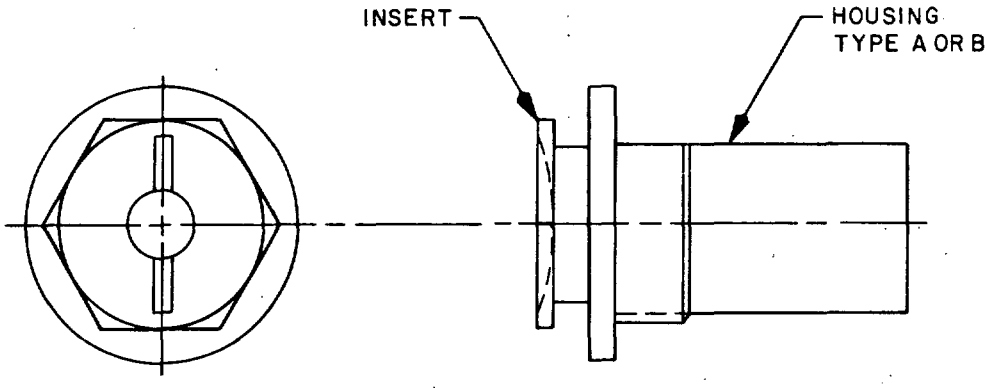


ASSEMBLED RECEPTACLES

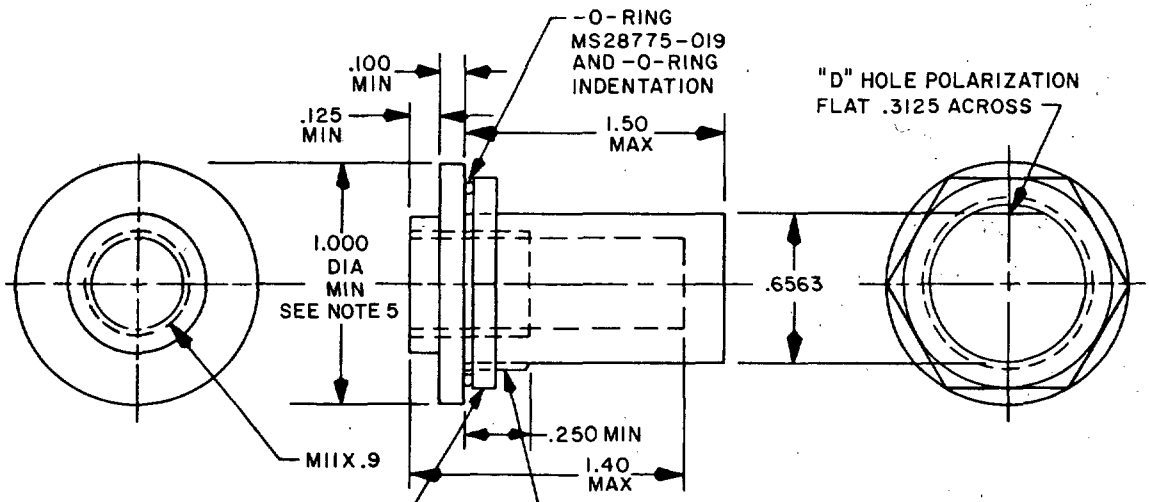


HOUSING TYPE A
COUPLING NUT MOUNTING

FIGURE 1. Grounding receptacles.

FSC 5935
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:02Z
Check the source to verify that this is the current version before use.

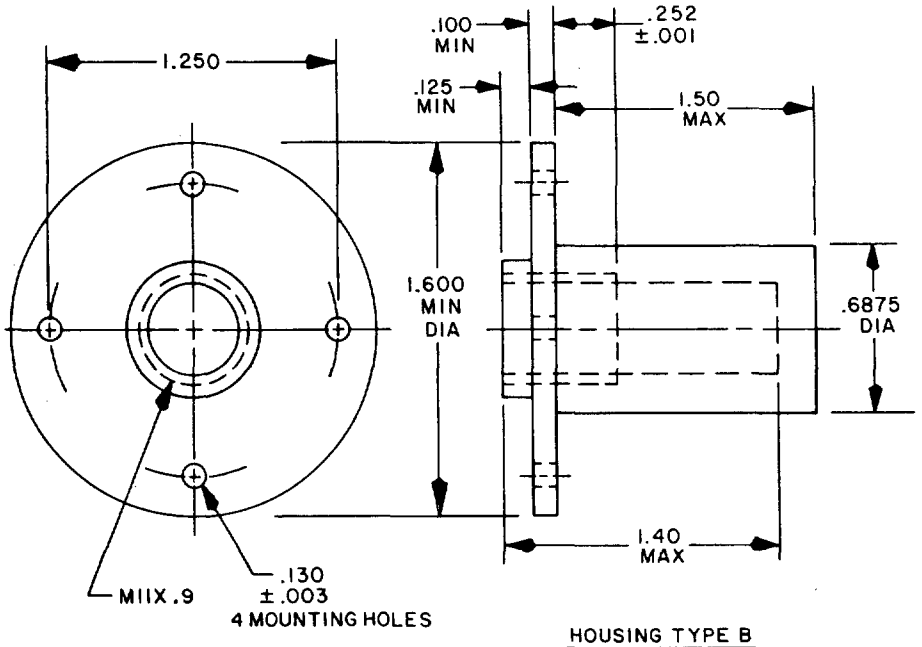

HOUSING TYPE B
RIVET MOUNTING

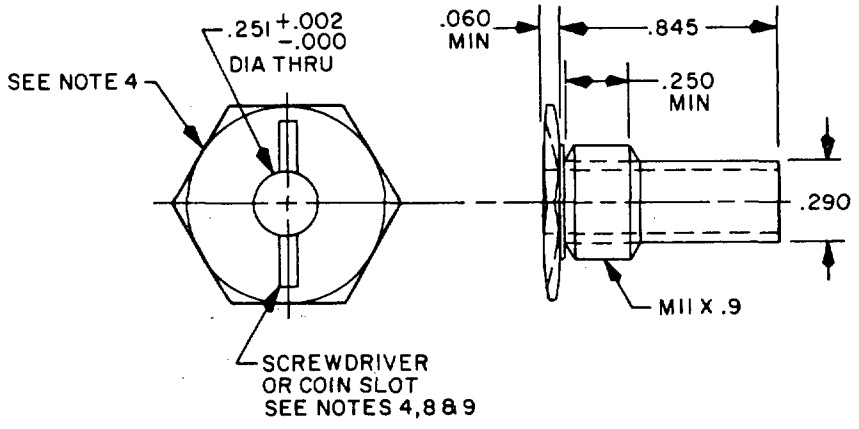

INSERT

INCHES	MM	INCHES	MM
.002	.05	.290	7.37
.003	.08	.3125	7.94
.060	1.52	.6563	16.67
.100	2.54	.6875	17.46
.125	3.18	.845	21.46
.130	3.30	1.000	25.40
.250	6.35	1.250	31.75
.251	6.37	1.40	35.6
.252	6.40	1.50	38.1
		1.600	40.64

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm) for three place decimals and ±.0010 (.025 mm) for four place decimals.
4. When hex flanges are used on inserts, the hex shall be .750 inch (19.05 mm) for opposite flats and .438 inch (11.13 mm) across the flats. Circularly flanged inserts shall be turnable by a standard screwdriver. Hex flanged inserts shall be turnable by means of a coin.
5. Housing flanges need not be circular, however, the surface area of the flange shall be at least of the minimum size shown.
6. M16 x 1.0 metric threads may be used as an option. .6875-24 UNEF-2B threads may be used as an option, mounting nut then shall be MS3186-36 or MS 27514-9E.
7. Changes in the bore dimensions will result in international interoperability problems.
8. Coin slot width .073 (1.85 mm) minimum.
9. .068 (1.73 mm) is minimum depth measured to theoretical intersection of the arc with the horizontal centerline.
10. Housing may be welded or brazed.
11. Insert/housing threads (unless otherwise specified) are metric.

FIGURE 1. Grounding receptacles - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Material:

Inserts: Brass per QQ-B-613.

Insert detents: Beryllium copper per QQ-C-530.

Housing: Stainless steel per MIL-S-7720, 300 series composition, condition A, passivated per QQ-P-35.

Finish: Cadmium plate per QQ-P-416, type II, class 2, or aluminum coating, plating, or zinc per ASTM B633.

Contact resistance: Shall not exceed 5.0 milliohms.

Durability: 3,000 cycles.


O-rings: Shall be supplied with housing type A.

Mounting nut: Shall be supplied with housing type A.

Fluid immersion: Not applicable to housing type B.

Mating plug: Per MIL-C-83413/4.

Part number:

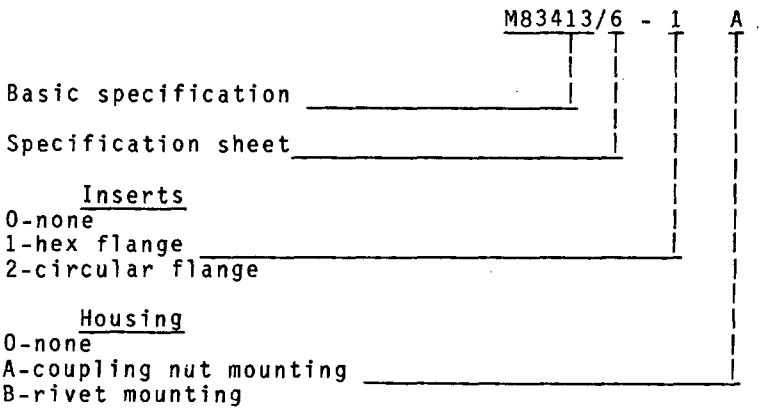

Certain provisions of this specification are the subject of International Standardization Agreements ASCC AIR STD 12/25 and NATO STANAG 3632. When revision or cancellation of this specification is proposed which will affect or violate the international agreements concerned, the preparing activity will take appropriate reconciliation action through international standardization channels, including departmental standardization offices, if required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:02Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AV
Navy - AS
Air Force - 11

Review activities:
Army - ME, AR, CR, MI
Air Force - 13, 18, 82, 85, 90, 99
DLA - ES

User activity:
Navy - MC

Agent:
DLA - ES

Preparing activity:
Air Force - 11

(Project 5935-3142-6)

☆U.S. GOVERNMENT PRINTING OFFICE: 1984 — 705-040/A2193

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:02Z
Check the source to verify that this is the current version before use.