
INCH-POUND
MIL-C-83413/6A
27 Dec 93
SUPERSEDING
MIL-C-83413/6
23 March 1984

MILITARY SPECIFICATION SHEET


CONNECTORS AND ASSEMBLIES, ELECTRICAL, AIRCRAFT
GROUNDING: RECEPTACLES, TWO PIECE, WITH INSERTS AND HOUSINGS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

(A) The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of specifications and standards (DODISS) specified in the solicitation: MIL-C-83413.

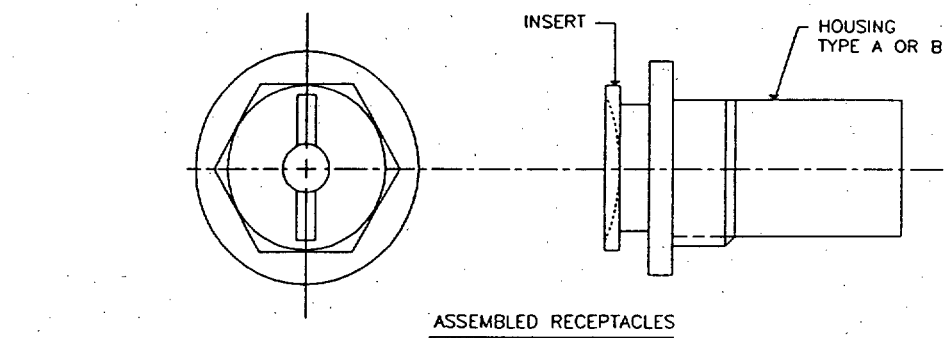

ASSEMBLED RECEPTACLES

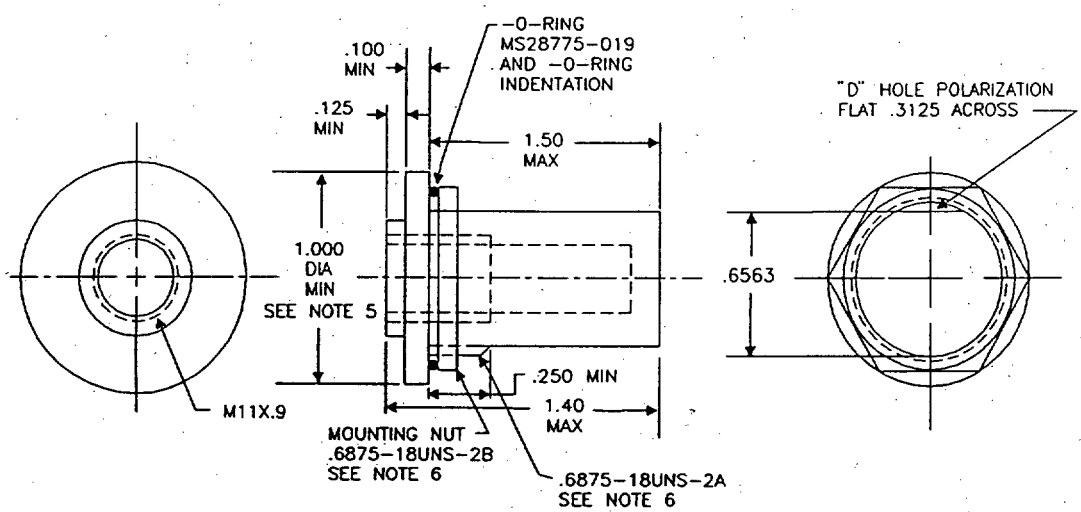


HOUSING TYPE A
COUPLING NUT MOUNTING

FIGURE 1. Grounding receptacle.

(A) denotes changes


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:01Z
Check the source to verify that this is the current version before use.

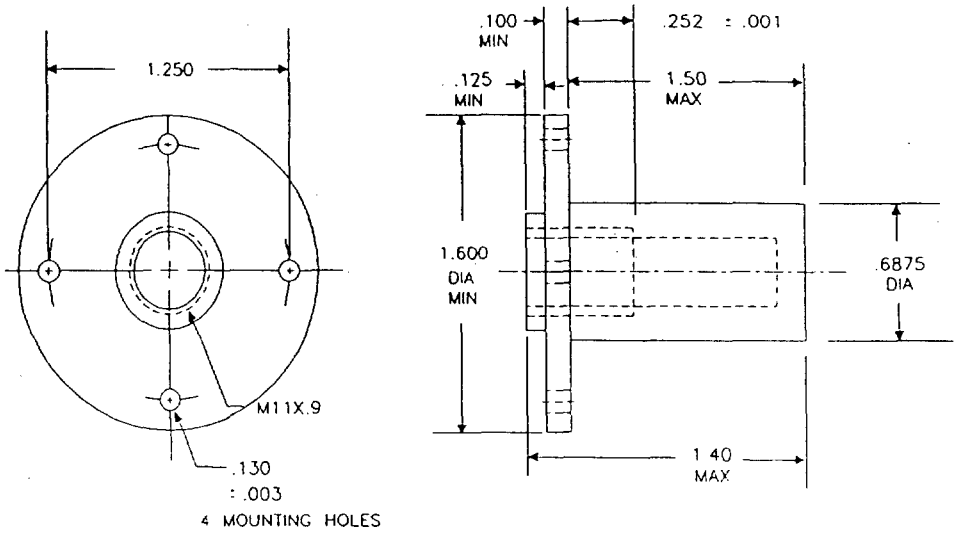

HOUSING TYPE B

COUPLING NUT MOUNTING

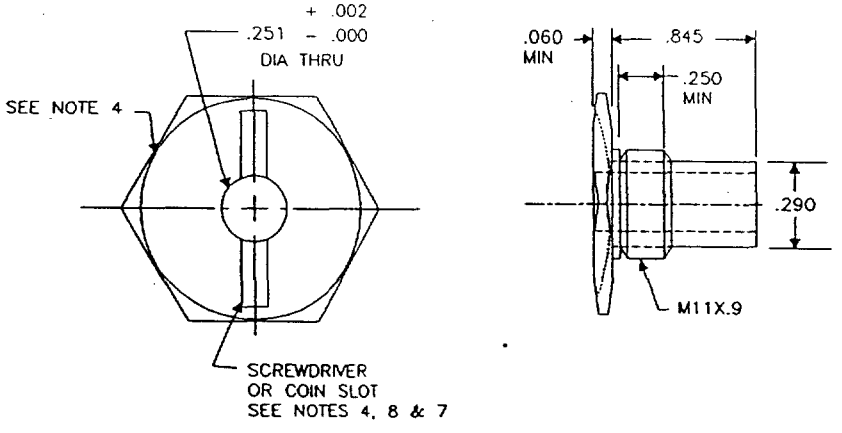

INCHES	MM	INCHES	MM
.002	.05	.290	7.37
.003	.08	.3125	7.94
.060	1.52	.6563	16.67
.100	2.54	.6875	17.46
.125	3.18	.845	21.46
.130	3.30	1.000	25.40
.250	6.35	1.250	31.75
.251	6.37	1.40	35.60
.252	6.40	1.50	38.10
		1.600	40.64

INSERT

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm) for three place decimals and ±.0010 (0.025 mm) for four place decimals.
4. When hex flanges are used on inserts, the hex shall be .750 inch (19.05 mm) for opposite flats and .438 inch (11.13 mm) across the flats. Circularly flanged inserts shall be turnable by a standard screwdriver. Hex flanged inserts shall be turnable by means of a coin.
5. Housing flanges need not be circular, however, the surface area of the flange shall be at least of the minimum size shown.
6. M16 X 1.0 metric threads may be used as an option. .6875-24 UNEF-28 threads may be used as an option, mounting nut then shall be MS3186-36 or MS27514-9E.
7. Changes in the bore dimensions will result in international interoperability problems.
8. Coin slot width .073 (1.85 mm) minimum.
9. .068 (1.73 mm) is minimum depth measure to theoretical intersection of the arc with the horizontal centerline.
10. Housing may be welded or brazed.
11. Insert/housing threads (unless otherwise specified) are metric.

FIGURE 1. Grounding receptacles - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Material:

Inserts: Brass in accordance with QQ-B-613.

Insert detents: Beryllium copper in accordance with QQ-C-530.

Housing: Stainless steel in accordance with MIL-S-7720, 300 series composition, condition A, passivated in accordance with QQ-P-35.

Finish: Cadmium plate in accordance with QQ-P-416, type II, class 2, or aluminum coating, plating, or zinc per ASTM B633.

Contact resistance: Shall not exceed 5.0 milliohms.

Durability: 3,000 cycles.


O-rings: Shall be supplied with housing type A.

Mounting nut: Shall be supplied with housing type A.

Fluid immersion: Not applicable to housing type B.

Mating plug: In accordance with MIL-C-83413/4.

Part or Identifying Number (PIN):

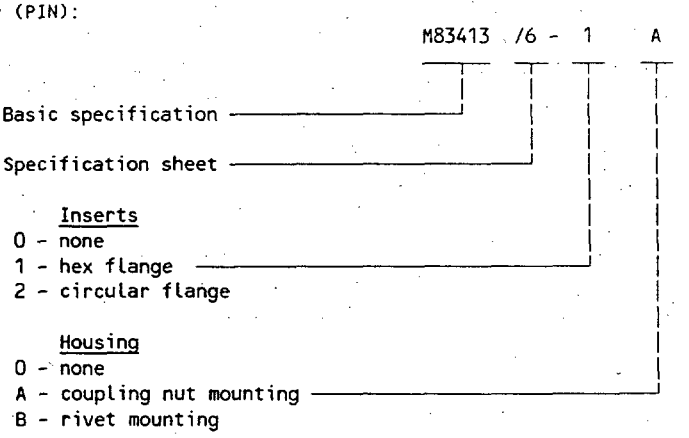

(A) QUALIFICATION:

(A) Qualification is not required for this specification sheet. First article inspection shall be a visual and mechanical inspection in accordance with 4.7.1 of MIL-C-83413.

Certain provisions of this specification are the subject of International Standardization Agreements ASCC AIR STD 12/25 and NATO STANAG 3632. When revision or cancellation of this specification is proposed which will affect or violate the international agreements concerned, the preparing activity will take appropriate reconciliation action through international standardization channels, including departmental standardization offices, if required.

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air Force - 85

Review activities:
Army - AR, CR, ME, MI
Navy - MC
Air Force - 13, 18, 82, 90, 99

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3962-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:01Z
Check the source to verify that this is the current version before use.