NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

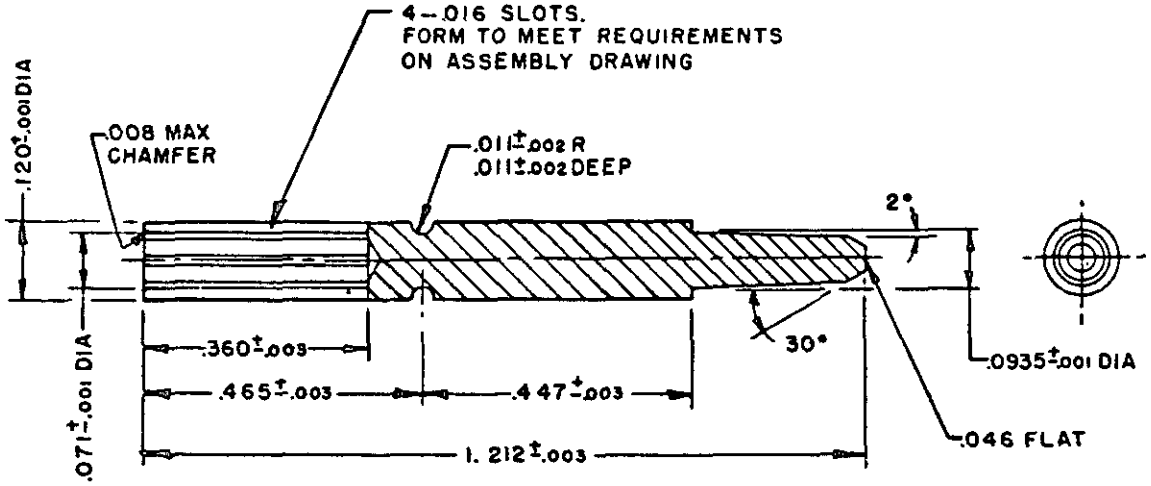

NOTE: HEAT TREAT IN SALT BATH
TO COND HT AFTER FORMING.

CANCELLED AFTER 10 JANUARY 1983. NO SUPERSEDING STANDARD.

NOTE: SPECIFICATIONS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONAL: ± 1/64 INCH
DECIMAL: ± .005 INCH
ANGULAR: ± 1/2 DEGREE

BERYLLIUM COPPER	MIL-C-947 COND H
MATERIAL	SPECIFICATION

APPROVED 7 Dec. 1951 REVISED (A) 10 JAN 1983

CUSTODIAN: BuShips Signal Corps	MILITARY STANDARD	MS90264
PROCUREMENT SPECIFICATION NONE	CONTACT; PART OF R F COAXIAL CONNECTORS	SHEET 1 OF 1

Other interest: Army - CT: Navy - AOrS: USAF

☆ GPO : 1952—O 980758

☆ U.S. GOVERNMENT PRINTING OFFICE: 1983—605-034-1169

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:33Z
Check the source to verify that this is the current version before use.