FED. SUP CLASS 5925

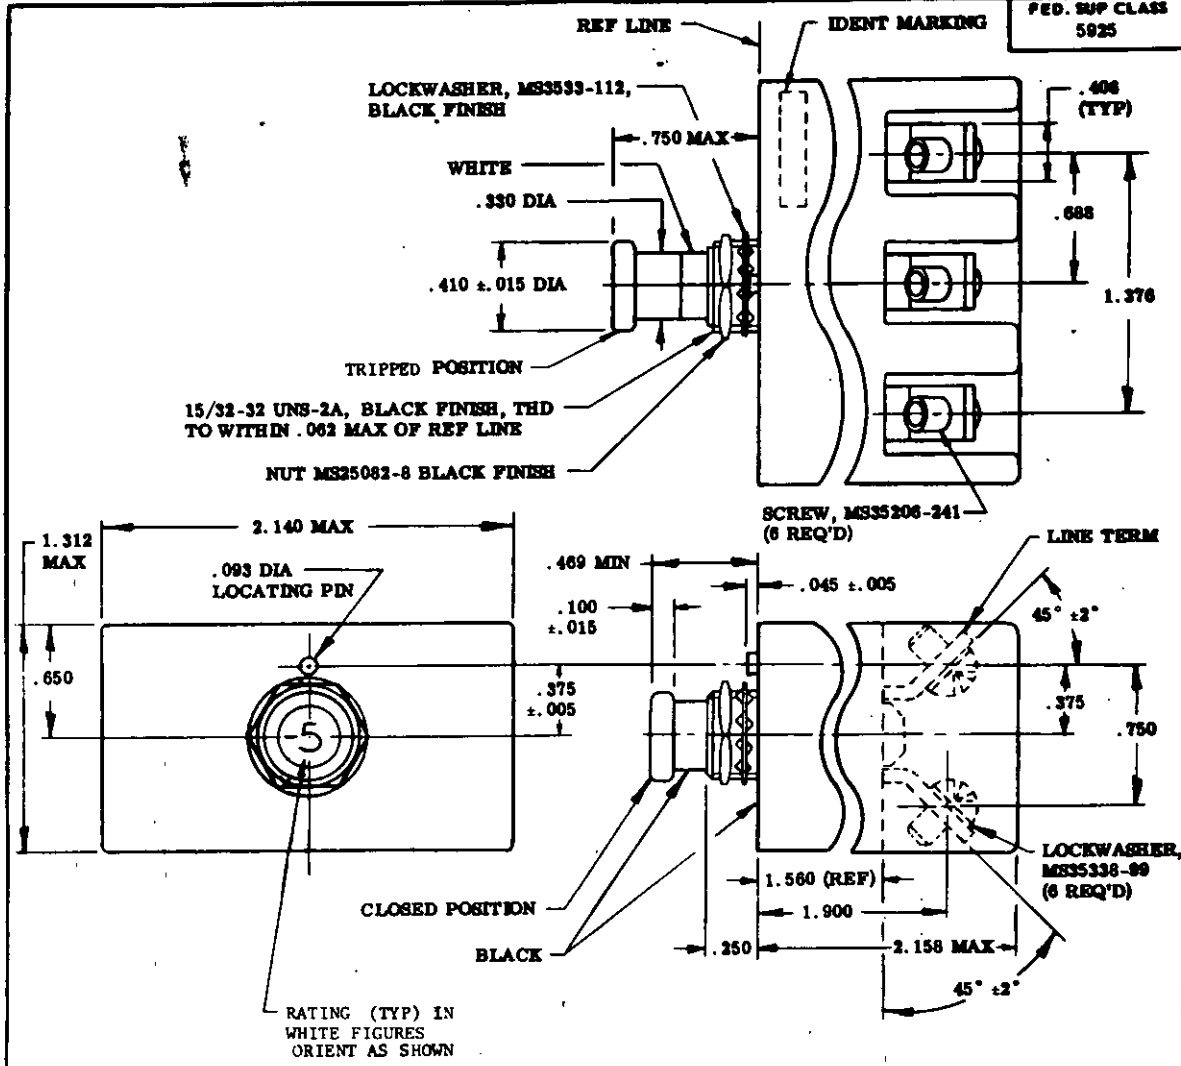

NOTE:

1. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.031. DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH USASI Y14.5-1966.

APPROVED 16 OCT 64 — REVISED (A) 25 APRIL 1969 (B) 19 JUNE 1981

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(B) CANCELLED AFTER 19 JUNE 1981. NO SUPERSEDING STANDARD.

P.A. NAVY-AS Other Cust	INTERNATIONAL INTEREST ASCC 12/3	TITLE: CIRCUIT BREAKER, TRIP FREE, PUSH-PULL, 3 PHASE, 5 THRU 50 AMP TYPE 1	MILITARY STANDARD MS90351(AS)
PROCUREMENT SPECIFICATION MIL-C-5809		SUPERSEDES: MS90351(WP)	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Limited coordination) — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. — PLATE NO. 17709

This standard has been approved by the NAVAL AIR SYSTEMS COMMAND, Department of the NAVY, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1981 0 — 703-023/5159

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:35Z
Check the source to verify that this is the current version before use.