INCH-POUND

MIL-R-83726/8E
23 July 2013
SUPERSEDING
MIL-R-83726/8D
7 July 2005


MILITARY SPECIFICATION SHEET

RELAYS, HYBRID, TIME DELAY, (ON RELEASE), TYPE IIA, CLASS A, 2 AMPERES, 2PDT, FIXED TIME, 0.100 TO 300 SECONDS

Inactive for new design after 22 July 1992.
For new design use MIL-PRF-83726/29.

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-83726.

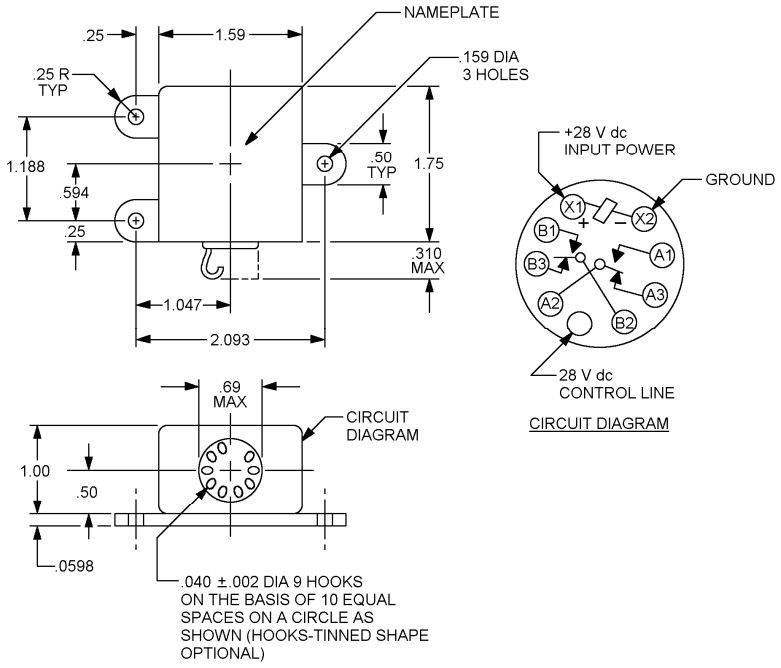

Inches	mm	Inches	mm
.002	0.05	.50	12.70
.005	0.13	.594	15.09
.010	0.25	.69	17.53
.030	0.76	1.00	25.40
.040	1.02	1.047	26.59
.0598	1.52	1.188	30.18
.159	4.04	1.59	40.39
.25	6.35	1.75	44.45
.310	7.87	2.093	53.16

FIGURE 1. Outline dimensions and configuration of relay.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:27Z
Check the source to verify that this is the current version before use.

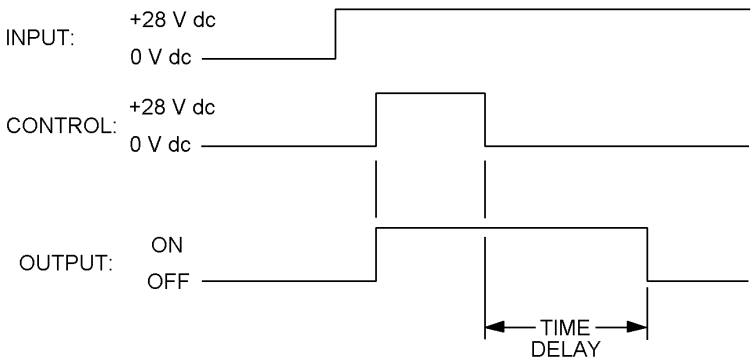

TIMING DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.010 (0.25 mm) for three place decimals and ±.03
3. (0.8 mm) for two place decimals.
4. Metric equivalents are given for general information only.
5. Terminal numbers shall not appear on the relay header and there shall be affixed to the relay a permanent legible schematic diagram that identifies each terminal location specified.

FIGURE 1. Outline dimensions and configuration of relay - Continued.

TABLE I. Available time delay relays. 1/

Dash number	Time delay seconds ±10%	Dash number	Time delay seconds ±10%	Dash number	Time delay seconds ±10%	Dash number	Time delay seconds ±10%
-1000	2/ .100	-1402	14	-7002	70	-1803	180
-5000	2/ .500	-1602	16	-7502	75	-1903	190
-7500	2/ .750	-1802	18	-8002	80	-2003	200
-1001	1	-2002	20	-8502	85	-2103	210
-2001	2	-2202	22	-9002	90	-2203	220
-3001	3	-2502	25	-9502	95	-2303	230
-4001	4	-3002	30	-1003	100	-2403	240
-5001	5	-3502	35	-1103	110	-2503	250
-6001	6	-4002	40	-1203	120	-2603	260
-7001	7	-4502	45	-1303	130	-2703	270
-8001	8	-5002	50	-1403	140	-2803	280
-9001	9	-5502	55	-1503	150	-2903	290
-1002	10	-6002	60	-1603	160	-3003	300
-1202	12	-6502	65	-1703	170		

1/ Additional time delay relays within the .100- to 300 second delay range are available. To establish Part or Identifying Numbers (PIN's) not listed in table I (see "PIN" herein).

2/ Add ±10 milliseconds to ±10 percent tolerance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

CONTACT DATA:

Configuration: 2PDT; 2 form C.

Life/load rating (relay case grounded):

Type of load	Life (cycles)	28 V dc	Amperes 115 V ac - 1 phase 60 and 400 Hz
Resistive	100,000	2.0	0.3
Inductive	100,000	1.0	0.3
Lamp	100,000	0.1	0.1

Contact voltage drop:

Initial: 0.150 volt maximum.

After life tests: 0.200 volt maximum.

Intermediate current: Applicable in accordance with MIL-R-5757.

Contact bounce: 2 milliseconds maximum, to be measured on each contact set using an oscilloscope, contacts shall be loaded with rated current and voltage.

Overload:

Resistive: 200 percent rated current.

Inductive: 200 percent rated current.

INPUT DATA:

Duty power: Continuous.

Range of voltage: 18 to 31 V dc.

Input power: 18 to 31 V dc.

Control line power: 18 to 31 V dc.

Minimum voltage - high temperature: 18 V dc.

Maximum current at 25°C and 28 V dc: 110 milliamperes.

Time delay: Fixed time .1 to 300 seconds (see table I).

Time delay tolerance: ±10 percent except as noted in table I, under all combinations of input voltage and all environmental conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:27Z
Check the source to verify that this is the current version before use.

Recycle characteristics:

Before time out: Control power must remain off at least 25 milliseconds or 1 percent of the nominal time delay, whichever is greater, after which reapplication of control power for 25 milliseconds minimum will recycle the timer with a loss in timing no greater than 10 percent.

After time out: Reapplication and subsequent removal of control power will recycle the timer. Control power must be applied for 25 milliseconds or 1 percent of the total time delay, whichever is greater, to insure a loss in timing accuracy no greater than 10 percent.

Polarity protection: The unit will be inoperative during, and undamaged by, reversal of the input polarity.

ELECTRICAL DATA:

Insulation resistance at 500 V dc 1/:

Initial: 1,000 megohms minimum.

After life or environmental tests: 500 megohms minimum.

Dielectric withstanding voltage (sea level):

Input (1 and 9) 1/ :

Initial: 1,000 V rms.

After life: 1,000 V rms

All other points 2/:

Initial: 1,000 V rms.

After life: 500 V rms.

Dielectric withstanding voltage (altitude):

Input (1 and 9): 350 V rms 1/

All other points: 350 V rms 2/

Transients: In accordance with MIL-STD-704 for 28 V dc system (figure 11).

1/ Input terminals 1, 5, and 9 must be connected together during this test.
2/ All pins to case for this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:27Z
Check the source to verify that this is the current version before use.

ENVIRONMENTAL DATA:

Temperature range: -65°C to +125°C.

Altitude: 80,000 feet.

Shock: 50 G's for 11 ±1 milliseconds, MIL-STD-202, method 213A, condition A.

Contact opening: 10 microseconds maximum duration. Monitor in accordance with method 310 of MIL-STD-202.

Vibration (sinusoidal): 10-80 Hz at .06 inch peak double amplitude, 80-3,000 Hz at 20 G's.

Acceleration: 50 G's steady state, no opening of closed contacts.

Sealing: Not applicable.

PHYSICAL DATA:

Dimensions and configuration: See figure 1.

Weight: 0.25 pound maximum.

Terminal strength: 3 ±0.5 pounds pull maximum.

Finish: Bright nickel in accordance with SAE-AMS-QQ-N-290, class 1, type IV.

Marking: See MIL-PRF-83726. In addition, relays shall be marked with the ESDS identifier as specified in MIL-STD-1285.

Electrostatic discharge (ESD) control program: Applicable (see MIL-PRF-83726).

Part or Identifying Number (PIN): Consists of the prefix M83726/8-, a four-digit dash number expressed in milliseconds as follows:

M	83726/8-	1001

Military designation

Specification sheet number

The first three digits are significant; the fourth digit is the number of zeros to follow the first three digits. (The time delay is expressed in milliseconds and converted to seconds.) See examples.

Example: M83726/8 - 0600 - 60 millisecond time delay.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:27Z
Check the source to verify that this is the current version before use.

CONFORMANCE INSPECTION:

Performance of groups B and C tests are not applicable.

The Qualified Products List (QPL) associated with this inactive for new design specification will be maintained until acquisition of the product is no longer required, whereupon this specification and the QPL will be canceled.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-PRF-83726, this document references the following:

MIL-R-5757	MIL-PRF-83726/29	SAE-AMS-QQ-N-290
MIL-STD-202	MIL-STD-704	MIL-STD-1285

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA – CC

Preparing activity:
DLA - CC

(Project 5945-2013-032)

Review activity:
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:27Z
Check the source to verify that this is the current version before use.