H–B–481c
August 31, 1965
SUPERSEDING
Fed. Spec. H–B–481b
March 21, 1962 and
Fed Spec. H–B–171a
May 12, 1947

FEDERAL SPECIFICATION

BRUSHES, SANITARY

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers bedpan, toilet, and cuspidor sanitary brushes.

1.2 Classification.

1.2.1 *Types and classes.* Sanitary brushes covered by this specification shall be of the following types and classes as specified. (See 6.2 and 6.3.)

Type I—Twisted-in wire, curved brush head.
- Class 1—Hog bristle.
- Class 2—Tampico fiber.
- Class 3—Horsetail hair.
- Class 4—Nylon filament.
- Class 5—Polypropylene filament.

Type II—Spiral-wound, straight brush head, tampico fiber.

Type III—Twisted-in wire, straight brush head, hog bristle.

Type IV—Wire bound, ball head palmetto fiber.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification to the extent specified herein:

Federal Specifications:

H–S–951—Synthetic Filaments, General Specification for Brushes.

PPP–B–636—Box, Fiberboard.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.

Fed. Std. No. 123—Marking for Domestic Shipment. (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C., 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL–W–6110—Wood, Determination of Moisture Content of.

Military Standards:

MIL–STD–105—Sampling Procedures and Tables for Inspection by Attributes.

MIL–STD–129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction sample. When specified (see 6.2), before production is commenced, three sample brushes of the type and class re-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

quired shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 **Standard product.** The brushes delivered under this specification shall be the manufacturer's standard commercial product, except for any modification and additional requirements specified herein.

3.3 **Materials.** The materials used shall conform to the requirements specified hereinafter. Materials not definitely specified shall be of the quality normally used by the supplier for his standard product.

3.3.1 *Wood.* The wood shall be close-grained and straight-grained beech, birch, maple, ash, hickory, pecan, red or white oak, Douglas fir or southern yellow pine. The moisture content, at time of fabrication, shall be not less than 8 percent or more than 12 percent when tested as specified in 4.3.2.

3.3.2 *Wire.*

3.3.2.1 *Twisting.* Unless otherwise specified herein, the twisting wire shall have a minimum diameter of 0.091 inch and shall be any one of the following materials:

(*a*) Steel wire, hot-dipped or electrodeposited zinc, or cadmium-plated, commercially identified as brush-handle wire.
(*b*) Brass wire.
(*c*) Corrosion-resisting steel wire.

3.3.2.2 *Winding.* Winding wire shall be not less than 0.031-inch diameter and may be any one of the following materials:

(*a*) Steel-wire, hot-dipped or electrodeposited zinc, or cadmium-plated.
(*b*) Brass wire.
(*c*) Corrosion-resisting steel wire.

3.3.3 *Filler materials.* The filler material shall be as specified hereinafter and shall have no evidence of artificial color except for the nylon and polypropylene, and no permanent change in stiffness applicable to all filler material when soaked in boiling water as specified in 4.4.1.

3.3.3.1 *Hog bristle.* The hog bristle shall be natural, black in color and sterilized as specified in 3.6.

3.3.3.2 *Fiber.*

3.3.3.2.1. *Tampico.* The tampico fiber shall be natural and unbleached.

3.3.3.2.2 *Palmetto.* The palmetto fiber shall be natural and oiled.

3.3.3.3 *Horsetail hair.* The horsetail hair shall be unflagged, either black or gray or a mixture of both and sterilized as specified in 3.6.

3.3.3.4 *Nylon.* The nylon shall be black filament with a nominal diameter of 0.012 inch and shall conform to class N, type II, H–S–951 except that the filament shall be crimped. (See 3.3.3.6.)

3.3.3.5 *Polypropylene.* The polypropylene shall be black crimped filament (see 3.3.3.6) with a nominal diameter of 0.012-inch when tested as specified in 4.4.6. The polypropylene shall be tested as specified in 4.4.6 for the following characteristics; the melting point shall be not less than 164° C. nor more than 170° C. The specific gravity shall be not more than 0.92. The loss in weight shall not exceed 0.3 percent. The moisture absorption shall not exceed 0.2 percent at 100 percent relative humidity and a temperature of 23° C. Polypropylene shall not dissolve or show visual swelling when immersed in the following solvents: Acetone, denatured ethyl alcohol, methanol, a mixture of equal parts of toluol and methanol, methyl-ethyl-ketone, ethylene dichloride, and chloroform. The modulus of elasticity after conditioning in distilled water for 16 hours shall be not less than 2.5×10^5 p.s.i. The shrinkage shall be not more than 10 percent, and the polypropylene shall not dissolve in nor be attacked by hydrochloric acid or N-butanol.

3.3.3.6 *Crimp.* The crimp of the nylon and polypropylene filaments supplied shall have a No. 10 medium frequency with an amplitude of 0.022 inch $\pm$0.005 inch when tested as specified in 4.4.7.

3.3.4 *Cement.* The cement shall be waterproof and acid-resisting.

3.4 **Design and construction.** The brushes shall be constructed similar to the applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

figures and shall conform to the requirements specified hereinafter. The brush shall consist of a handle and a brush part. When tested as specified in 4.4.2, it shall not be possible to remove the filler material from the brush part by pulling with a force of 8 pounds. The weight of the filler material shall be as required by tables I through IV when tested as specified in 4.4.3. Figures incorporated in this specification are for illustration and convenience of identification only and are not intended to preclude the purchase of brushes otherwise in accordance with the requirements of this specification.

3.4.1 *Type I brushes.* Type I brush shall conform to the requirements specified herein and in table I and shall be similar to figure 1.

3.4.1.1 *Brush part.* Type I brush parts shall be made using bristle, fiber, horsetail hair, nylon, or polypropylene, as specified (see 6.2), and the wire specified in 3.3.2.1. The filler material shall be held at its center in the twists of two wires in such a manner that they project perpendicular to the wires. The assembled brush part shall be curved into a horse-collar shape having a periphery of approximately 13 inches. In addition, the brush part shall be contoured so as to reach the inside rounded surfaces of a wash basin, toilet bowl, or bedpan. (See fig. 1.)

TABLE I.—*Physical requirements for type I brushes*

Components	Ounce per brush (minimum)	Dimensions (inches)
Handle:		
Length	----------	14±1
Diameter	----------	⅞±⅛
Brush part:		
Width	----------	4½±¼
Length	----------	5½±¼
Trimmed diameter of brush part (minimum)	----------	1⅞
Filler material:		
Class 1—Hog bristle	1. 56	----------
Class 2—Tampico fiber	1. 16	----------
Class 3—Horsetail hair	1. 56	----------
Class 4—Nylon	1. 25	----------
Class 5—Polypropylene	1. 00	----------

3.4.1.2 *Handle.* The handle shall be made from wood specified in 3.3.1 and shall be as specified in table I. The brush part end of the handle shall have a hole to receive the ends of the twisted wires of the brush part. The brush part end of the handle shall have staked to the handle a ferrule and collar constructed of either corrosion-resisting steel or nickel plated brass at the option of the manufacturer. After applying cement specified in 3.3.4 to the ends of the twisted wires, they shall be passed through the ferrule and collar into the handle. When tested as specified in 4.4.4 and 4.4.5, the cement shall show no signs of softening or disintegration and the handle and brush part shall not separate or loosen.

3.4.1.2.1 *Alternate construction.* At the option of the supplier, the handle and adaptors may be constructed of high impact polystyrene in accordance with the manufacturer's standard commercial practice. The brush end shall be fitted with an adaptor to receive and secure the twisted wires of the brush. The opposite end of the handle shall have an adaptor to hang the brush. When tested as specified in 4.4.5, the handle and brush part shall not separate or loosen.

3.4.1.3 *Handle end.* The handle end of the brush shall have either of the following provisions at the option of the manufacturer to hang the brush:

(*a*) A ¼-inch ±⅛-inch diameter hole located 1 inch ±¼ inch, from the end.

(*b*) A corrosion-resistant metal hook attached to the handle end.

3.4.2 *Type II brushes.* Type II brushes shall conform to the requirements specified herein and in table II and shall be similar to figure 2.

3.4.2.1 *Brush part.* The type II brush part shall be straight and constructed of Tampico fiber specified in 3.3.3.2.1. The fibers shall be held at their centers in the spiral grooves of the handle with wire specified in 3.3.2.2. The fibers shall project perpendicular to the wire to form a fully covered round brush head with a domed end. The handle end of the wire shall be anchored to the handle by a galvanized commercial common wire nail. The nail length shall not exceed the handle diameter. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

TABLE II.—*Physical requirements for type II brushes*

Components	Ounces per brush (minimum)	Dimensions (inches)
Handle:		
Length, from base of brush part		16+1–0
Diameter		15/16 ± 1/16
Brush part:		
Width		4 ± 1/4
Length		5 1/2 ± 1/4
Fiber:		
Length from handle, minimum		1 1/2
Weight	1. 96	

domed end shall be formed by means of a small wire-bound fiber tuft held with winding wire set close to the base of the tuft.

3.4.2.2 *Handle.* The handle for the type II brush shall be constructed of wood specified in 3.3.1 and may be either straight, as illustrated in figure 2, or slightly curved beyond the brush part at the option of the manufacturer. The portion of the handle within the brush part shall be spirally grooved to retain the fibers. The handle end of the handle shall be the same as the type I brush specified in 3.4.1.3.

3.4.3 *Type III brushes.* Type III brushes shall conform to the requirements specified herein and in table III and shall be similar to figure 3.

3.4.3.1 *Brush part.* The type III brushes shall have a straight brush part constructed of hog bristle specified in 3.3.3.1. The hog bristle shall be held at the center within the twists of 0.104 inch diameter single strand, steel brush handle wire specified in 3.3.2.1. The hog bristle shall project perpendicular to the twisted wire to form a spiral-wound brush part. The ends of the twisted wire shall be turned back toward the handle end to form a fan-shaped hog bristle end with the wire ends recessed within the brush part.

3.4.3.2 *Handle.* The handle for the type III brush shall be constructed from the same wire used in the brush part, tightly twisted and offset. The wire shall be twisted to not less than five nor more than eight double turns per inch (0.400- to 0.250-inch lead).

TABLE III.—*Physical requirements for type III brushes*

Components	Ounces per brush (minimum)	Dimensions (inches)
Length, overall		17 1/2 ± 1/2
Brush part:		
Length, overall (including fan shaped end)		6 1/2 ± 1/2
Diameter (trimmed)		2 ± 1/4–0
Handle:		
Length to offset from handle end		9+1/2–0
Length to offset from base of brush part		3/4 (min.)
Offset		1+1/4–0
Hog bristle, weight	1. 25	

3.4.3.2.1 *Handle end.* The handle end for the type III brush shall have an integral loop 2 3/4 inch ±1/8 inch long tapering from the twisted wire to a 1/2-inch ±1/8 inch, radius at the end.

3.4.4 *Type IV brushes.* Type IV brushes shall conform to the requirements specified herein and in table IV and shall be similar to figure 4.

3.4.4.1 *Type IV brush part.* Type IV brush shall have a brush part of palmetto fiber specified in 3.3.3.2.2. The fibers shall be securely bound to the handle with wire specified in 3.3.2.2. The outside end of the wire shall be securely fastened to the handle with a No. 16 flat head nail. A second nail staple shall fasten the wire to the handle and shall be approximately diametrically opposite the first nail. The nails shall not protrude through the handle.

3.4.4.2 *Handle.* The handle shall be constructed of wood specified in 3.3.1, and shall taper from the brush part to a bead end or be of even diameter throughout the length of the handle without a beaded end. The handle end shall have either a hook or a bored hole as specified in 3.4.1.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

TABLE IV.—*Physical characteristics for type IV brushes*

Components	Ounces per brush (minimum)	Dimensions (inches)
Handle (tapered):		
Length, overall	----------	14½ ± ½
Length, out of brush part	----------	12 ± ¼
Diameter:		
In and near brush part	----------	11/16 ± 1/32
Approximately ⅜ inch from upper end	----------	11/16 ± 1/32
Bead, end of block	----------	9/16 ± 1/32
Handle (even diameter)	----------	11/16 ± 1/32
Brush part:		
Diameter, approximately	----------	3¾
Radius of end trim, approximately	----------	1¾
Length	----------	4 ± ¼
Fiber:		
Weight, minimum	2.88	----------

3.5 Finish. Prior to assembly of the brush part and handle, the handle for the type II and IV brushes shall be coated with a water-resistant, clear lacquer or varnish in accordance with the manufacturer's standard practice. Type I brush handles shall be finished the same as types II and IV brushes except the coating may be done before or after assembly to the brush part.

3.6 Sterilization. Prior to manufacturing the brushes and, after thorough washing and rinsing of the brush head material, the horsetail hair and hog bristle shall be sterilized in accordance with any one of the procedures specified in 3.6.1, 3.6.2, or 3.6.3.

3.6.1 *Boiling water.* Hog bristle and horsetail hair shall be soaked in boiling water (212° F.) for not less than 30 minutes.

3.6.2 *Dry heat.* Hog bristle and horsetail hair shall be placed in a chamber and a temperature above 284° F. shall be developed and maintained for not less than 3 hours.

3.6.3 *Autoclaving.* Horsetail hair and hog bristle shall be placed in a steam pressure chamber for a minimum of 45 minutes at not less than 15 pounds per square inch gage (p.s.i.g.), at 248° F.

3.7 Marking for identification. Unless otherwise specified (see 6.2), the supplier shall permanently indent his name, or trademark of such known character easily identifiable with said manufacturer and the applicable Federal Stock Number on the handle of each type I, II, and IV brush. The above marking requirements shall not apply for type III brushes.

3.8 Workmanship. The finished brushes shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. When a preproduction sample is required, it shall be examined for defects in table V and specified dimensions. The preproduction sample shall be tested in accordance with 4.4.1 to 4.4.4, as applicable to each type or style brush.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL–STD–105, except where otherwise indicated.

4.3.1 *Inspection of components and materials.* In accordance with 4.1, the supplier is responsible for insuring that components and materials used were manufactured, tested, and inspected in accordance with the specified requirements or referenced subsidiary specifications and standards or if none, in accordance with this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

4.3.1.1 *Process examination.* Examination shall be made of the sterilization of the hog bristle and horsetail hair to establish that no deviation is made from the specified procedure or requirement. Whenever a deviation is noted, correction shall be made to the affected item and lot in process.

4.3.1.2 *Polypropylene filament.* The polypropylene characteristics and the diameter of the filament shall be tested as specified in 4.4.6.

4.3.1.3 *Filament crimp.* The crimp of the nylon and polypropylene filaments shall be tested as specified in 4.4.7.

4.3.2 *Intermediate testing.* Tests shall be performed on each lot of wood offered for acceptance at time of fabrication for moisture content in accordance with MIL–W–6110. The sample unit shall be one piece of wood. Three determinations shall be taken on each sample unit and results shall be the average of the three determinations. The inspection level shall be S–2 with an acceptable quality level (AQL) of 2.5 defects per hundred units.

4.3.3 *End item inspection.* A lot shall consist of all the brushes of one type and class offered for acceptance at one time. The sample unit shall be one completely fabricated brush.

4.3.3.1 *Visual examination.* Examination of the end item shall be in accordance with the defects listed in table V. The inspection level shall be level II with an AQL of 2.5 for major defects and 6.5 for total defects per hundred units respectively.

TABLE V.—*Classification of defects*

Examine	Defect	Classification	
		Major	Minor
Workmanship design and construction.	Exposed sharp wire, nails, sharp edges or splinters	X	
	Not finished as specified	X	
	Wood splintered, torn or loose grained	X	
	Hole or hook not as specified when applicable	X	
Polystyrene handle	Adaptors loose	X	
Wire handle	Not twisted and offset	X	
	Rough finish		X
	Handle end not as specified		X
Brush	Filler material not clean, evidence of dirt or foreign matter	X	
	Filler material not evenly distributed in brush head		X
	Brush head not evenly trimmed		X
	Brush head not securely fastened to wooden handle	X	
	Ferrule and collar loose	X	
	Nails or staples not securely fastened		X
Marking	Omitted, incomplete, or incorrect	X	

4.3.3.2 *Dimensional examinations.* Inspection shall be made of the end item for compliance with dimensions specified. Any deviation from specified requirements shall constitute a defect. The inspection level shall be S–2 and the AQL shall be 4.0 defects per hundred units.

4.3.3.3 *Testing of the end item.* The end item shall be tested as specified in 4.4.1 through 4.4.7. The inspection level shall be S–1 and the AQL shall be 4.0 defects per hundred units. The sample unit shall be 3 brushes.

4.3.4 *Examination of preparation for delivery.* An examination shall be made to determine compliance with the packaging, packing, and marking requirements of section 5. The sample unit shall be one shipping container fully

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

prepared for delivery. The lot shall be the number of containers offered for delivery at one time. The inspection level shall be S–2 and the AQL shall be 6.5 defects per hundred units. Defects shall be scored as specified in table VI.

TABLE VI.—*Examination of preparation for delivery*

Examination	Defect
Markings (exterior and interior containers).	Missing, incorrect, illegible or improper size, location, sequence or method of application.
Material	Component missing, damaged or otherwise defective.
Workmanship	Inadequate application of components such as incomplete closure of case liners (when applicable), container flaps, loose strapping or tape banding; bulging or distortion of containers.
	Intermediate package containers more or less than required.

4.4 Tests.

4.4.1 *Soak test.* The filler material shall be soaked in boiling water 212° F. for not less than 1 hour and shall be examined for any evidence of artificial color as specified in 3.3.1. After drying in air for not less than 1 hour, it shall be examined for any change in stiffness as specified in 3.3.3.

4.4.2 *Set retention.* Grasp the filler material tuft with a suitable holding device and applying a force, by using a spring scale or weight of 8 pounds in the direction tending to pull the tuft loose to determine compliance with 3.4.

4.4.3 *Filler material.* Filler material shall be removed from the brush and conditioned for not less than 16 hours in air at a relative humidity of 50±4 percent and at a temperature of 23°±1.1° C. Weighing for compliance with 3.4 and tables I through IV shall be performed in the same atmosphere.

4.4.4 *Cement softening and disintegration.* Submerge the type I brush for 24 hours in a sodium hypochlorite solution containing 1.0 percent by weight available chlorine so that at least 2 inches of the handle will be in the solution. After 24 hours the brush shall be removed and rinsed thoroughly in water and examined for compliance with 3.4.1.2.

4.4.5 *Pull test.* After passing the test in 4.4.4, the brush and wood handle shall be dried in air. When dry, the wood handle or when a polystyrene handle is furnished, the handle shall be held in one hand and the brush in the other and then pulled with any force capable of being exerted without mechanical aid to determine compliance with 3.4.1.2 and 3.4.1.2.1.

4.4.6 Polypropylene filament as specified in 3.3.3.5 shall be subject to the applicable tests as described for class N, type II filaments in H–S–951.

4.4.7 *Frequency and amplitude.* The frequency shall be measured by the average number of crimps per inch of 10 filaments when measured at a normal position. The amplitude shall be measured by the average distance, in $\frac{1}{1000}$ inch, measured on 10 filaments between the mean position and extreme as specified in 3.3.3.6.

5. PREPARATION FOR DELIVERY

For civil agency procurements, the definitions and application of levels of packaging and packing shall be in accordance with Fed. Std. No. 102.

5.1 Packaging. Packaging shall be level A or C as specified. (See 6.2.)

5.1.1 *Level A.* Twelve brushes, of one type and class only, shall be packaged in a snug-fitting fiberboard box conforming to style RSC, type CF or SF, class domestic of PPP–B–636. Brushes shall be arranged six wide, two deep and reversed head to handle. Type I brushes shall be packaged on edge. A separator pad shall be placed between the layers of brushes. Brushes composed of hog bristles, tampico fibers, horsetail hair, and palmetto fiber, shall contain sufficient naphthylene or other suitable repellent to protect the brushes from moths or other insects. Closure shall be in accordance with the appendix of the box specification.

5.1.2 *Level C.* Brushes shall be packaged in accordance with the industry's practice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

5.2 **Packing.** Packing shall be level A, B, or C as specified. (See 6.2.)

5.2.1 *Level A.* Seventy-two brushes of one type and class only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to V3c or V3s, style RSC of PPP–B–636. Each shipping container shall be closed, waterproofed by means of tape and reinforced with flat steel strapping or tape banding in accordance with the appendix of the container specification.

5.2.2 *Level B.* Unless otherwise specified, 72 brushes of one type and class only, packaged as specified in 5.1 shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF or SF, class domestic, of PPP–B–636, except that the bursting strength of the fiberboard shall be 200 pounds per square inch (p.s.i.). When specified, 12 brushes, packaged as specified in 5.1.1, shall require no overpacking. Closure shall be in accordance with the appendix of the container specification.

5.2.3 *Level C.* Brushes, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation at the lowest transportation rate for such supplies.

5.3 **Marking.**

5.3.1 *Civil agencies.* In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military requirements.* In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL–STD–129.

6. NOTES

6.1 **Intended use.** Types I, II, and III brushes covered by this specification are intended primarily to be used to clean wash basins, toilet bowls, and bedpans. Type IV brush covered by this specification is intended primarily to be used to clean cuspidors.

6.2 **Ordering data.** Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) Type and class of brush required (see 1.2).

(*c*) When preproduction sample is specified (see 3.1).

(*d*) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 **Supersession data.** Types I, II, and III brushes covered by this specification are the same as types I, II, and III respectively, of brushes covered by H–B–481b. The type IV brush covered by this specification was previously covered by H–B–171a.

6.4 **Standard pack for civil agencies.** The standard pack requirements in 5.2.2 are intended for use in procurements of stores stock replenishments. Procuring officers should use the standard pack requirements when it is known that the material will be shipped from a supplier to a domestic warehouse, supply depot or intermediate storage point for temporary storage, subsequent issue or shipment to eventual user.

6.5 **Transportation description.** The transportation descriptions and minimum weights applicable to this commodity are:

Type I, classes 1, 3, 4—Type III

Rail:

Brushes, not otherwise indexed by name.
Carload minimum weight 24,000 pounds, subject to Rule 11.
Uniform Freight Classification.

Motor:

Brushes, not otherwise indexed.
Carload minimum weight 24,000 pounds, subject to Rule 115.
National Motor Freight Classification.

Type I, class 2—Types II and IV

Rail:

Brushes, vegetable or wood fiber.
Carload minimum weight 30,000 pounds.

Motor:

Brushes, not otherwise indexed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

Truckload minimum weight 24,000 pounds, subject to Rule 115.
National Motor Freight Classification.

Custodians:
Army—GL
Navy—SA
Air Force—69
Review activities:
Army—GL, MD
Navy—SA, MS
Air Force—69

User activities:
Army—MO, SM
Navy—YD, MC
Air Force—03
Preparing activity:
Army—GL

Review and user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing of DOD Standardization Documents.

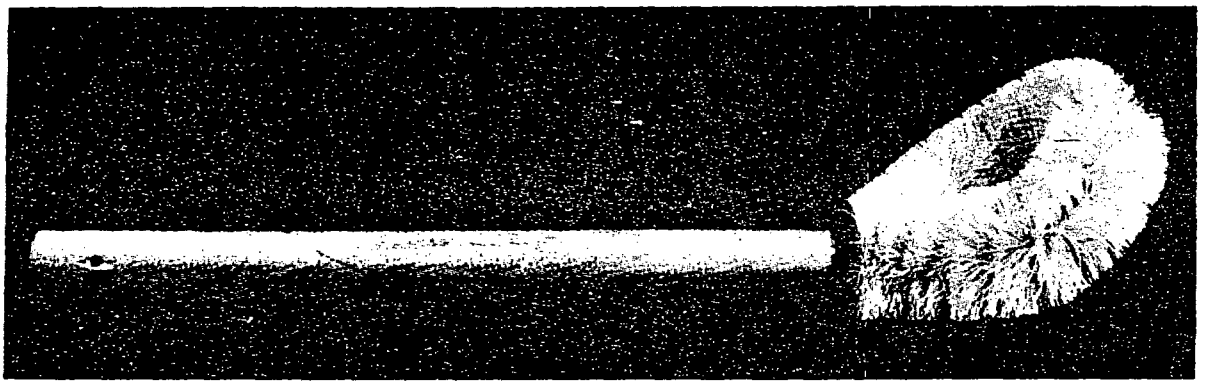


Figure 1

Type I—Twisted-in wire, curved brush head



Figure 2

Type II—Spiral-wound, straight brush head

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

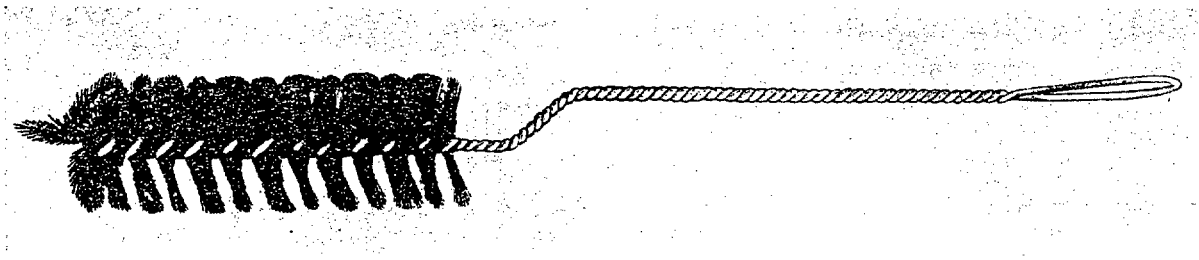


Figure 3

Type III—Twisted-in wire, straight brush head



Figure 4

Type IV—Wire-bound, ball shaped brush head

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.