H-B-695G
October 1, 1976
SUPERSEDING
Fed. Spec. H-B-695F
February 4, 1974

FEDERAL SPECIFICATION

BRUSHES, VARNISH, FLAT

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers flat varnish brushes made with hog bristle or synthetic filament.

1.2 Classification. The brushes shall be of the following types, grades, and sizes as specified (see 6.2). (Size denotes the width of the brush inside the ferrule).

Type I. Bristle.

Grade A. Triple X thickness.

Size, inches

1-1/2
2
2-1/2
3

Grade B. Double X thickness.

Size, inches

1
1-1/2
2
2-1/2
3

Grade C. Regular thickness.

Size, inches

1/2
1
2

Type II. Synthetic filament.

Grade A. Triple X thickness.

Size, inches

1-1/2
2
2-1/2
3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:07Z
Check the source to verify that this is the current version before use.

Grade B. Double X thickness.

Size, inches
1
1-1/2
2
2-1/2
3

Grade C. Regular thickness.

Size, inches
1
1-1/2
2
2-1/2
3

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

H-S-951 - Synthetic Filaments for Brushes, General Specification for.
TT-B-838 - Butyl Acetate, Normal (For Use in Organic Coatings).
TT-M-261 - Methyl Ethyl Ketone, Technical.
PPP-B-1880 - Brushes, Preparation for Delivery of.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Chemical Society (ACS) Specifications:

Reagent Chemicals (Fifth Edition).

Butyl Alcohol (n-Butanol); N,N-Dimethylformamide;
Methylene Chloride (Dichloromethane); Toluene

(Application for copies should be addressed to the American Chemical Society, 1155 Sixteenth Street, NW, Washington, DC 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:07Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Design. Brushes as specified herein shall consist of a handle and bristle or synthetic filaments manufactured to meet all requirements of this specification.

3.2 Materials and components. Materials and components shall conform to the requirements specified herein. Where the materials or components are not definitely specified, they shall be of the best quality used for the purpose in commercial practice.

3.2.1 Bristle. The bristle brushes shall be natural hog bristle unbleached and undyed, either natural black or varied colors used separately or blended together. The bristle shall be thoroughly boiled or steamed and straightened (see 3.7), and properly prepared so that they will not twist nor curl, and shall be free from reconditioned bristle and adulterants. The bristle shall meet the size and stiffness designations in table I. See 6.5 for origin of bristle.

3.2.2 Synthetic filament. The synthetic filament for type II brushes shall be an organic polymeric material. The filaments which meet the requirements conform to H-S-951, class N, type I and class E, type I, tapered filaments for the size designations in table II of this specification. The filament shall be black in color for class N and sable brown in color for class E and shall be thoroughly mixed. The selection of either filament is at the option of the supplier. Prior to blending, all filaments shall be tipped to a depth of not less than 3/16 inch. After tipping and prior to blending, 20 percent by weight of the filaments of each size and length shall be flagged (see 6.3.2).

3.2.3 Ferrule. The ferrule shall be made of corrosion-resistant steel, or steel made corrosion-resistant by a coating which shall not wrinkle, blister, separate, or become soft, dull, or discolored when tested in accordance with 4.4.2.1.

3.2.4 Handle. The handle shall be made of close-grained hardwood, smoothly finished and coated with varnish, lacquer or clear organic material. At the option of the supplier, the handle may be made of a synthetic material that will withstand the test in 4.4.2.1 without any perceptible change in the material and will not crack or break when tested in accordance with 4.4.2.2.

3.2.5 Filler strips. Filler strips used to fill out the ferrule shall be wood, metal, plastic, or non-absorbing fiber. The total thickness of the filler strips is optional with the manufacturer. The filler material used shall show no perceptible change when tested in accordance with 4.4.2.1.

3.2.6 Setting compound. Setting compound shall be an epoxy cement which shall withstand the test specified in 4.4.2.1 without softening or deteriorating, and without loosening of bristle or filament in the compound.

3.3 Construction.

3.3.1 Brushing part.

3.3.1.1 Type I. The bristle shall be 60 percent top size (dressed bristle described as 60 percent top size denotes that bundle consists of 60 percent bristle measuring 1/16 inch or more above the length specified to 1/8 inch below the length specified; 30 percent to consist of bristle from 1/8 to 3/8 inch below length specified; 10 percent will be 3/8 inch to not exceeding 1/2 inch below specified size, but including a few unavoidable shorts) and blended in accordance with table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:07Z
Check the source to verify that this is the current version before use.

3.3.1.2 Type II. The brushes shall be composed of 100 percent synthetic filament conforming to 3.2.2. The length and size designation in accordance with H-S-951 shall be blended as specified in table II. A tolerance of plus or minus 3 percent shall be permitted in the individual blend percentages.

3.3.2 Ferrule. The ferrule shall be made of the materials specified in 3.2.3 and shall have an end lap of not less than 1/4 inch. The lap shall be reinforced by not less than two rivets and shall then be securely soldered. Alternatively, the ferrule may have an end lap of 1/8 inch and shall be interlocked and soldered, lock-seamed, or welded. The ferrule shall be secured to the handle by nailing as follows: on 1 inch brushes there shall be 3 nails, one on one side and two evenly spaced on the other; on the 1-1/2, 2, 2-1/2, and 3-inch brushes there shall be 4 nails, two on each side evenly spaced; in grade C, type I brushes, the handle may be secured by any feasible method. When the construction of 3.3.4 is used, the nails shall go through both the ferrule and perforated insert into the handle. Rivets or screw type nails may be used to secure the ferrule to handles made of a synthetic material.

TABLE I. Blend of bristle in type I brushes

Grade	Brush Size (inside)	Length of bristle (inches) 3-3/4 Percent	3-1/2 Percent	3-1/4 Percent	3 Percent	2-3/4 Percent	2-1/2 Percent	2-1/4 Percent	2 Percent
	3	80	15	5	--	--	--	--	--
	2-1/2	--	80	15	5	--	--	--	--
A	2	--	--	80	15	5	--	--	--
	1-1/2	--	--	--	80	15	5	--	--
	3	--	--	80	15	5	--	--	--
	2-1/2	--	--	--	80	15	5	--	--
B	2	--	--	--	--	80	20	--	--
	1-1/2	--	--	--	--	--	100	--	--
	1	--	--	--	--	--	100	--	--
	2	--	--	--	--	--	--	--	100
C	1	--	--	--	--	--	--	--	100
	1/2	--	--	--	--	--	--	--	100
Bristle Mixtures		30% - Stiff 30% - Medium 40% - Soft		20% - Medium 80% - Soft		100% - Soft			

TABLE II. Blend of synthetic filament+ in type II brushes

Grade	Brush size (inches)	Filament size designation+	Length of filament (inches) 2-1/4 Percent	2-1/2 Percent	2-3/4 Percent	3 Percent	3-1/4 Percent	3-1/2 Percent	3-3/4 Percent
	1-1/2	12-8	--	20	20	--	--	--	--
		9-5	--	--	--	60	--	--	--
	2	12-8	--	--	20	20	10	--	--
A		9-5	--	--	--	--	50	--	--
	2-1/2	12-8	--	--	--	20	20	20	--
		9-5	--	--	--	--	--	40	--
	3	12-8	--	--	--	--	20	20	40
		9-5	--	--	--	--	--	--	20
	1	9-5	30	70	--	--	--	--	--
	1-1/2	9-5	30	70	--	--	--	--	--
B	2	12-8	--	30	--	--	--	--	--
		9-5	--	--	70	--	--	--	--
	2-1/2	12-8	--	20	20	--	--	--	--
		9-5	--	--	--	60	--	--	--
	3	12-8	--	--	20	20	10	--	--
		9-5	--	--	--	--	50	--	--
	1	9-5	--	100	--	--	--	--	--
	1-1/2	9-5	--	100	--	--	--	--	--
C	2	9-5	--	--	100	--	--	--	--
	2-1/2	9-5	--	--	100	--	--	--	--
	3	9-5	--	--	--	100	--	--	--

+ In accordance with H-S-951.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:07Z
Check the source to verify that this is the current version before use.

3.3.3 Handle.

3.3.3.1 Grades A and B. Wood handles for grades A and B brushes shall be of the turned Kaiser style or Beavertail style. Handles made of synthetic material shall be of similar shape.

3.3.3.2 Grade C. The handle for grade C brushes shall be of the quality used in commercial practice.

3.3.4 Set. The butt ends of the bristle or filament shall be set in a setting compound conforming to 3.2.6. Filler strips may be used to fill out the ferrule. The bristles or filaments shall be positioned and an inner one-piece ferrule with a perforated base used. The perforated insert must extend from the edge of the ferrule to a distance of not less than 1/16 inch of the butt end of the bristle or filament and must be centered in the ferrule. The insert width shall not be more than 5/8 inch shorter than the width of the brush. The setting material shall be at least 1/8 inch above the bottom of the insert.

The inner one piece perforated insert may be omitted in all sizes of grade B and all sizes of grade C brushes provided they are manufactured using a ferrule with a groove at the base of the setting compound and the assembly riveted to the ferrule with not less than one rivet per inch. Rivet ends shall be smoothly finished.

3.4 Trim.

3.4.1 Type I.

3.4.1.1 Type I, grades A and B. The type I, grades A and B brushes shall be cupped or machined to a chisel edge with a minimum chisel of 1/2 inch. If cup chiseled, flag ends shall be preserved. If machine chiseled, the flag ends shall be sanded to a fine soft edge.

3.4.1.2 Type I, grade C. The type I, grade C brushes shall be formed to a square top.

3.4.2 Type II.

3.4.2.1 Type II, grades A and B. The type II, grades A and B brushes shall have a minimum 1/2-inch chiseled edge, cut by a mechanical trimmer and then sanded to a fine soft chisel edge.

3.4.2.2 Type II, grade C. The type II, grade C brushes shall be formed to a square top with tipped or flagged ends of the filament preserved.

3.5 Physical requirements.

3.5.1 Type I. The brushes shall conform to the requirements in table III.

3.5.2 Type II. The brushes shall conform to the requirements in table IV.

3.6 Marking for identification. Unless otherwise specified (see 6.2), and in addition to any special markings required by the contract or order, each brush shall be marked with the contractor's name or trade mark and with the National Stock Number.

3.7 Workmanship. The finished brushes shall be clean, well made, and free from any defects which may affect appearance or serviceability. There shall be no sharp edges, splinters, or burrs. The brushing part shall be trimmed evenly and uniformly to the finished length outside the ferrule, with the sanded or flagged end preserved.

The procuring activity shall require certification that bristle used has been sterilized by either boiling, dry heat, or autoclaving and is straightened when tested in accordance with 4.4.2.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:07Z
Check the source to verify that this is the current version before use.

TABLE III. Physical requirements for type I brushes

GRADE	Width of brush inside ferrule (minimum)	Thickness of brush inside ferrule (minimum)	Hold of bristle in ferrule (minimum)	Length of bristle outside ferrule (minimum)	Weight of bristle per brush (minimum)	Depth of ferrule (minimum)	Thickness of metal ferrule (minimum)
	Inches	Inch	Inch	Inches	Ounces	Inches	Inch
A	1-1/2	11/16	1/4	2-3/4	11/16	1-15/32	.009
	2	3/4	1/4	3	1-3/16	1-15/32	.011
	2-1/2	13/16	1/4	3-1/4	1-3/4	1-15/32	.011
	3	13/16	1/4	3-1/2	2-3/8	1-15/32	.013
B	1	7/16	1/4	2-1/4	1/4	1-15/32	.009
	1-1/2	1/2	1/4	2-1/4	1/2	1-15/32	.009
	2	9/16	1/4	2-1/2	3/4	1-15/32	.011
	2-1/2	5/8	1/4	2-3/4	1-3/16	1-15/32	.011
	3	11/16	1/4	3	1-3/4	1-15/32	.011
C	1/2	1/4	1/4	1-5/8	3/32	1-1/4	.010
	1	5/16	1/4	1-3/4	1/8	1-1/4	.010
	2	5/16	1/4	1-3/4	7/32	1-1/4	.010

TABLE IV. Physical requirements for type II brushes

GRADE	Width of brush inside ferrule (minimum)	Thickness of brush inside ferrule (minimum)	Hold of filament outferrule (minimum)	Length of filament outside ferrule (minimum)	Weight of filament per brush (minimum)	Depth of ferrule (minimum)	Thickness of metal in ferrule (minimum)
	Inches	Inch	Inch	Inches	Ounces	Inches	Inch
A	1-1/2	11/16	1/4	2-11/16	13/16	1-15/32	.009
	2	3/4	1/4	2-15/16	1-3/8	1-15/32	.011
	2-1/2	13/16	1/4	3-3/16	2	1-15/32	.011
	3	13/16	1/4	3-7/16	2-7/16	1-15/32	.013
B	1	7/16	1/4	2-3/16	9/32	1-15/32	.009
	1-1/2	1/2	1/4	2-3/16	9/16	1-15/32	.009
	2	9/16	1/4	2-7/16	7/8	1-15/32	.011
	2-1/2	5/8	1/4	2-11/16	1-5/16	1-15/32	.011
	3	11/16	1/4	2-15/16	1-7/8	1-15/32	.011
C	1	3/8	1/4	2-1/4	1/4	1-15/32	.010
	1-1/2	13/32	1/4	2-1/4	7/16	1-15/32	.010
	2	7/16	1/4	2-1/2	23/32	1-15/32	.010
	2-1/2	15/32	1/4	2-1/2	15/16	1-15/32	.010
	3	1/2	1/4	2-3/4	1-15/32	1-15/32	.010

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:07Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling and inspection. Sampling for inspection and lot acceptance shall be in accordance with MIL-STD-105.

4.3 Component and material inspection. In accordance with 4.1, the supplier is responsible for insuring that components and materials used were manufactured, examined, and tested in accordance with this specification or referenced subsidiary specifications.

4.3.1 Color (bristle). Hog bristle shall be tested in accordance with 4.4.1.1 for compliance with 3.2.1. The sample unit shall be either one completed brush or the bristle component for one brush. The inspection level shall be S-2 and the acceptable quality level (AQL) shall be 4.0 percent defective.

4.3.2 End item inspection. The sample unit for this inspection shall be one completed brush and the lot size shall be expressed in units of brushes.

4.3.2.1 Visual examination. The end item shall be examined for the defects in table V. The inspection level shall be level II and the AQL shall be 4.0 percent defective.

TABLE V. Visual defects in the end item

Examine	Defects
Materials:	Any material not as specified.
Handle	If wood, not a close-grained hardwood.
	Any knot, knothole, split, or other imperfection which may affect serviceability.
	Not coated with varnish, lacquer, or other clear material.
Design and construction:	Handle not turned Kaiser or panel style as applicable.
	Ferrule not constructed as specified (see 3.3.2).
	Method of setting other than specified (see 3.3.4).
	Trim not type specified (see 3.4).
Workmanship	Handle not smooth.
	Uncoated area on handle.
	Any imperfection that may affect appearance or serviceability.
	Bristle or filament not evenly distributed in brushing part.
	Brushing part not evenly and uniformly trimmed.
	Any sharp edge, splinter, or burr.
	Brushing part not clean; evidence of dirt or foreign matter.
Identification Marking:	Missing or incomplete.
	Not indented.
	Not legible.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:07Z
Check the source to verify that this is the current version before use.

4.3.2.2 Dimensional examination. The end item shall be examined for compliance with all specified dimensions. Any deviation from specified dimensions shall constitute a defect. The inspection level shall be S-3 and the AQL shall be 2.5 percent defective.

4.3.2.3 Testing of the end item. The end item shall be tested in accordance with 4.4.2. Inspection level S-2 shall apply and the AQL shall be 4.0 percent defective.

4.3.3 Examination of the preparation for delivery. An examination shall be made to determine whether the packaging, packing, and marking comply with section 5 of this specification. The examination shall be conducted as specified in PPP-B-1880.

4.4 Test procedures. Alternate test techniques and equipment may be used, but in case of dispute, the methods specified here shall prevail. Unless otherwise specified, the standard laboratory conditions are a temperature of 23 ± 1°C (73 ± 2°F) and a relative humidity of 50 ± 5 percent.

4.4.1 Components and materials.

4.4.1.1 Color test. Samples of bristle, selected in accordance with 4.3.1.1, shall be soaked in boiling 5 percent HCl (C.P. concentrated grade) for not less than 5 minutes. The bristle and the solution shall show no color other than green. The appearance of other than a green color shall be indicative of coloring matter and nonconformance with 3.2.1.

4.4.1.2 Weight of bristle or filament.

4.4.1.2.1 Removal of setting compound from bristle or filament. The ferrule shall be removed from the bristle or filament and setting compound. The setting compound shall be broken into small pieces, approximately 1/4 to 1/2-inch, care being taken not to injure the bristle or filament. The butt ends of the bristle or filament shall be immersed to a depth of not less than 1/8-inch above the setting compound. They shall be immersed in a solvent of methylene chloride or dimethylformamide or a mixture of 95 parts of methylene chloride and 5 parts of dimethylformamide. The bristle or filament, after soaking for 15 minutes, shall be removed from the solvent. The butt end, when grasped between the forefinger and thumb, shall be rolled back and forth gently. Thus, the setting compound will become loose, and it can be removed by shaking. This treatment shall be repeated until the setting compound has been removed entirely. Usually four treatments are sufficient for complete removal. After the setting compound has been removed and the solvent has been allowed to evaporate, the bristle or filament shall be conditioned in accordance with 4.4.1.2.2.

4.4.1.2.2 Conditioning of bristle or filament. The bristle or filament shall be conditioned for not less than 16 hours at standard laboratory conditions. The weight of the bristle or filament shall be determined in the same atmosphere.

4.4.2 End item.

4.4.2.1 Solvent resistance. The end item shall be tested for solvent resistance using a solvent composed of the following mixture:

	Percent by weight
Normal butyl acetate (TT-B-838)	15 ± 1
Normal butyl alcohol (ACS Reagent grade)	15 ± 1
Methyl ethyl ketone (TT-M-261)	10 ± 1
Toluene (ACS Reagent grade)	Remainder

The brush shall be suspended so that the brushing part and approximately one-half of the ferrule are immersed in the solvent mixture for 1 hour at standard laboratory conditions. When a synthetic handle is supplied half of the handle shall also be immersed in the solvent mixture. The brush shall be removed and examined

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:07Z
Check the source to verify that this is the current version before use.

as follows:

4.4.2.1.1 Handle and ferrule. As soon as the brush is removed from the solvent, the handle and ferrule shall be examined for wrinkling, blistering, separation of the coating, or perceptible change in material. Filler strips shall be examined for softening or perceptible change in material. The brush shall be dried for 2 hours at standard laboratory conditions and the coating examined for softening, dulling, or discoloration.

4.4.2.1.2 Setting compound. At the time the brush is removed from the solvent, the setting compound shall be examined for excessive softening, solubility in the solvent or loosening of the bristle or filament. The brush shall then be dried for a period of 24 hours at standard laboratory conditions, the ferrule removed, and the setting compound reexamined for evidence of deterioration or loosening of the bristle or filament.

4.4.2.2 Drop test (synthetic handle). Remove bristle or synthetic filament and ferrule. Handles made of synthetic material shall show no sign of cracking or breaking when dropped twice from a height of 10 feet to a concrete surface.

4.4.2.3 Straightness. A bristle or hair can only be regarded as permanently straight if it is straight after it has been in water and this should be the test applied to any material after processing.

Place assembled brush or brush head so that bristle is immersed in 140°F water for 5 minutes. Shake out excess water. Hang brush with bristle down and allow to dry completely. Measure flare by aligning ferrule portion of brush at right angles and parallel to the ferrule alignment lines ("A" - vertical and "B" - horizontal), touching both lines as shown in figure 1.

4.4.2.4 Tipping and flagging of filament. The depth of tipping and flagging the filament shall be determined with a ruler and magnifying glass.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing, and marking. The preservation (when applicable), packaging, packing, and marking shall be in accordance with PPP-B-1880. The level of packaging shall be A, B, or C, the level of packing shall be A, B, or C, and the marking shall be civil or military, as specified (see 6.2).

6. NOTES

6.1 Intended use. Varnish brushes covered by this specification are intended for use as a finishing brush to apply varnish, lacquer, enamel, and shellac to smooth-surface materials.

6.2 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, grade, and size of brush required (see 1.2).
(c) Preproduction sample when required (see 3.1).
(d) When identification marking is not required (see 3.6).
(e) Level of packaging and packing required (see 5.1).
(f) Whether civil or military marking is required (see 5.1).

6.3 Definitions.

6.3.1 Tipping (sanding). Through a series of grinding or sanding operations, a very fine, soft, and even top is provided and abrasions are placed on the surface of the filament to duplicate the naturally scaly surface of true bristle (see 3.2.2).

6.3.2 Flagging. A procedure whereby the bundles of filament are forced down on rotating knives to split the ends in the form of a flag, for maximum paint pick-up (see 3.2.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:07Z
Check the source to verify that this is the current version before use.

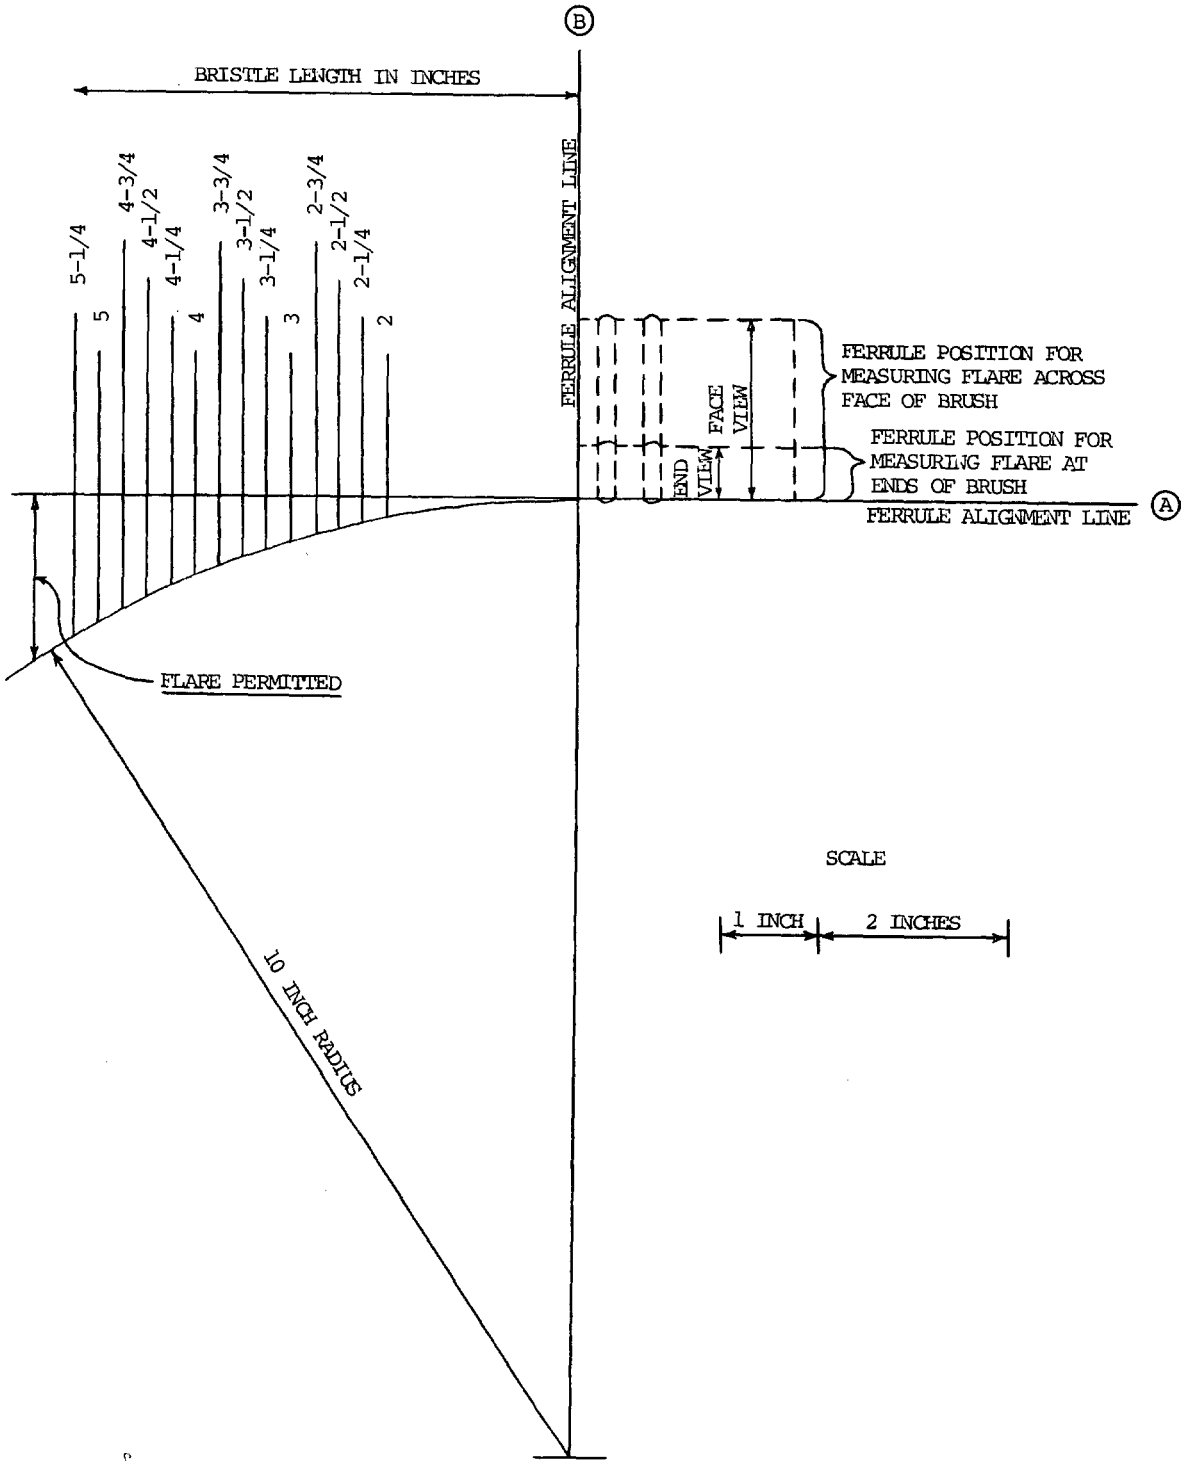


Figure 1. Flare measurement

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:07Z
Check the source to verify that this is the current version before use.

6.4 The following types of bristle are suitable for brushes:

SOFT	MEDIUM	STIFF
German	German Spine	Indian
French	Bosnian	Chunking
Italian	Gostorg	
Yugoslavian	Formosan	
Korean	Brasilian	
Polish	Chilean	
Tientsin	Hankow	
Tsingtau	Shanghai	
Manchurian		

Review Activity:

Navy - YD

CIVIL AGENIES COORDINATING ACTIVITIES:

GSA - FSS
DCG
COM - NBS
POS
VA
GPO
FPI

PREPARING ACTIVITY: GSA - FSS

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See Section 2 of this specification to obtain extra copies and other documents referenced herein. Price 35 each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:07Z
Check the source to verify that this is the current version before use.