MIL-C-36904A
24 April 1973
SUPERSEDING
MIL-C-36904
19 October 1972

MILITARY SPECIFICATION

COAT AND TROUSERS, PAJAMA, COTTON-POLYESTER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the requirements for hospital pajama coats and trousers (see 6.1).

1.2 Classification. The pajama coats and trousers shall be one type in the following sizes:

Schedule of Sizes

Extra Small
Small
Medium
Large
Extra Large

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

JJ-W-155	Webbing, Textile, (Cotton, Elastic).
UU-P-268	Paper, Kraft, Untreated, Wrapping.
DDD-L-20	Label, for Clothing, Equipage, and Tentage, (General Use).
DDD-T-86	Tape, Textile, Cotton, General Purpose (Unbleached, Bleached or Dyed).
PPP-B-636	Box, Fiberboard.

FSC 6532

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

Military

MIL-F-10884	Fasteners, Snap.
MIL-T-43548	Thread, Polyester, Cotton-Covered.
MIL-T-43624	Thread, Polyester, Spun.

STANDARDS

Federal

FED-TEST METHOD STD-NO. 191	Textile Test Methods.
FED-STD-NO. 751	Stitches, Seams and Stitching.

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity, or as directed by the contracting officer.)

2.2 Other publication. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

STANDARD COLOR CARD OF AMERICA, 9th EDITION

(Application for copies should be addressed to the Color Association of the United States, Inc., 200 Madison Avenue, New York, N.Y. 10016.)

3. REQUIREMENTS

3.1 Materials.

3.1.1 Fibers.

3.1.1.1 Polyester fiber. The fiber shall be polyethylene glycol terephthalate.

3.1.1.2 Cotton. The cotton shall be combed or well carded.

3.1.2 Yarns. The warp and filling yarns shall be 2 singles blend of 50 ± 3 percent polyester and the remaining percentage cotton, based on the dry weight of the desized and finished cloth.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:33Z
Check the source to verify that this is the current version before use.

3.1.3 Cloth.

3.1.3.1 Weave. The weave shall be a plain weave (broadcloth).

3.1.3.2 Physical requirements. The finished fabric shall conform to the requirements listed in Table I when tested as specified in Table VI.

Table I - Physical requirements

Weight oz sq yd	Yarns per inch minimum		Breaking strength pounds minimum	
Minimum	Warp	Filling	Warp	Filling
3.5	100	60	75	35

3.1.1.3 Color. The cloth shall be dyed blue 290.

3.1.3.4 Sulfur content. The use of sulfur dye or dyes containing elementary sulfur or sulfur compounds capable of oxidation to sulfuric acid is prohibited. The finished cloth shall contain no more than a trace of labile sulfur when tested as specified in Table VI.

3.1.3.5 Matching. The cloth shall be a good approximation to the standard sample under (North sky) daylight or artificial daylight, having a color temperature of 7500° Kelvin and shall be a good approximation to the standard sample under incandescent lamplight at 2800° Kelvin.

3.1.3.6 Colorfastness.- The finished cloth shall show "fair" fastness to light, and "good" fastness to crocking, perspiration, and laundering (after 3 cycles). Tests shall be performed as specified in Table VI.

3.1.3.7 Finish.- The cloth shall be mercerized and dyed. Following dyeing, the cloth shall be closely singed.

3.1.3.8 pH.- The pH value of the water extract of the finished cloth shall be not less than 5.0 nor more than 9.0 when tested as specified in Table VI.

3.1.3.9 Nonfibrous materials.- The starch and protein content including chloroform-soluble and water-soluble material of the finished cloth shall not exceed 2.0% when tested as specified in Table VI.

3.1.3.10 Shrinkage.- The finished cloth shall not shrink nor elongate more than 2.0 percent in either the warp or the filling when tested as specified in Table VI. The pre-shrinking process used shall not be identified by name or trademark; either on the cloth, ticket, or package.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:33Z
Check the source to verify that this is the current version before use.

3.1.4 Thread. The thread for seaming and stitching shall be polyester, cotton covered, ticket Nos. 50, 3 ply, and 70, 2 ply, conforming to MIL-T-43548. Spun polyester thread, ticket Nos. 50, 3 ply, and 70, 2 ply, conforming to class 1 or 2 of MIL-T-43624 may be substituted for the polyester, cotton-covered thread. The thread shall be dyed to match the base fabric.

3.1.5 Tape, cotton. The cotton tape used to reinforce the crotch seam shall conform to type II of DDD-T-86 and shall be 5/8 inch wide with woven edges. The tapes shall be bleached white.

3.1.6 Elastic webbing. The elastic webbing for the waistband shall be white, 1-1/4 inches wide, conforming to type I, class 9 of JJ-W-155.

3.1.7 Snap fasteners. The snap fasteners shall be 16 or 17 line, conforming to style 3 (pronged ring head type) of MIL-F-10884, except the metal shall be stainless steel of the 300 series (Heavy-Duty).

3.1.8 Label. Each pajama coat and trouser shall have a combination size and identification label conforming to type 1, classes 1 and 2 of DDD-L-20, except the color of the finished label shall be dyed (see 3.1.8.1). As an alternate, a combination size and identification label constructed of cloth cotton coutil or poplin having a greige weight of 2.11 yards per pound based on 45 inch width may be used. The basic cloth shall be dyed to match the color specified in 3.1.8.1. The label shall be printed in black by rotogravure to withstand repeated laundering and retain legibility throughout the useful life of the garment to which the label is attached. The label shall be a heat sealable or sew-on type. When heat sealable labels are used, there shall be a thermoplastic compound, suitable for heat sealing, applied to the back of the label. When adhered to the garment, the label shall remain completely adhered after eight successive launderings when tested as specified in table VI. The label shall be nontoxic and shall not cause skin irritation. The label shall be of adequate size to contain the item description, contract number, size, Federal stock number, and any information required by the Fur, Wool or Fiber Products Act, as appropriate. The size and type of print shall be as specified for type I, classes 1 and 2, of DDD-L-20.

3.1.8.1 Color. The combination size and identification label shall be vat or naphtal dyed one of the following colors (in conformance with the Standard Color Card of America, 9th Edition) for the appropriate size:

Tan (cable no. 70128)	For Extra Small Size
Peach Blossom (cable no. 70098)	For Small Size
Lemon Yellow (cable no. 70205)	For Medium Size
Indian Orange (cable no. 70072)	For Large Size
Primitive Green (cable no. 70167)	For Extra Large Size

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

3.1.8.2 Colorfastness. The finished dyed label shall show good colorfastness to laundering transference, and fair colorfastness to accelerated laundering; the printing shall be clearly legible after being tested as specified in section 4 of DDD-L-20.

3.1.8.3 Instruction label. The instruction label shall conform to class 3 of DDD-L-20 and shall contain the following information:

Washing Instructions

Close snap fasteners.
Machine wash, medium set
Do not use chlorine bleach or starch.
Use fabric softener to whiten and to
prevent clinging.
Tumble dry, medium set.
Remove from dryer immediately.
Little or no ironing.
"CAUTION - To comply with NFPA 56A, use
appropriate ionizing (anti-static) agents
in final rinse."

3.1.8.4 Laundering instructions. The following laundering instructions shall be legibly printed on a suitable paper insert that shall be placed in a visible position within the polyethylene bag containing the finished garment (see 5.1). Lettering shall be a minimum 1/8 inch. Size of insert shall be at the option of the supplier.

"Launder with suitable ionizing agent before first use in medical facility"

Laundering Instructions

Operation	Time (Mins)	Water Level	Temperature °F	Supplied per 100 lbs.
Suds	5	High	160	Synthetic Detergent (1) 4 Ozs by volume Sodium Orthosilicate (2) 4 Ozs by volume
Suds (4)	5	High	160	Synthetic Detergent 4 Ozs by volume
Rinse	3	High	150	None
Rinse	3	High	135	None
Sour	3	High	120	Sour to pH 6.5
Rinse	3	High	105	None
Anti-Stat (3)	5	Low	90	Anti-static agent 2-1/2 qts per 100 qts of water

(1) Detergent, Laundry, Type I FSN 7930-929-1220 50 lb drum
(2) Sodium Orthosilicate FSN 6810-264-6523 100 lb drum

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

(3) Acceptable anti-static agents - Stantex 461 -Standard Chemical Products Co. 131 Jefferson St., Hoboken, N. J.
Aston 456 -Refined Onyx Division, Millmaster Onyx Corporation, Lyndhurst, N. J.

Dilute these products with at least an equal amount of water before adding to the washwheel. Operate the washer at the lowest practical water level, then add the required amount of anti-static agent after determining the amount of water at that level.

(4) If a bleach is required, use at the rate of 2 quarts of 1% chlorine bleach per 100 pounds of garments.

3.2 Design. The pajama coat has a front closure with 4 snap fasteners, a left breast patch pocket and one-piece sleeves (long). The coat is collarless, with neck facings. The pajama trousers has an adjustable elastic waistband and is closed with snap fasteners (see figures 1 and 2).

3.3 Figures. The figures are furnished for information only. To the extent of any inconsistencies between the written specification and the figures, the written specification shall govern.

3.4 Patterns. Standard patterns to be used to cut supplier's working patterns, will be furnished by the Government. The working patterns shall be identical to the standard patterns which show size, directional lines and notches for correct assembly. The standard patterns shall not be altered in any way. The patterns provide a 1/2 inch seam allowance for double-lapped double-stitched or safety-stitch seams, and 3/8 inch for all other seams unless otherwise indicated in table III.

3.4.1 List of pattern parts. The component parts of the coat and trousers shall be cut from the specified materials in accordance with the number of parts required.

Table II. List of pattern parts

Material	Pattern nomenclature	Cut parts
	COAT	
Cloth, polyester/ cotton, broadcloth	Front	2
	Back	1
	Sleeve (one piece)	2
	Reinforcement piece for snap fasteners	2
	Neck facing (back)	1
	Front facing	2
	Pocket	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

Table II. List of pattern parts (cont'd)

Material	Pattern nomenclature	Cut parts
	TROUSERS	
	Front	2
	Back	2
	Right fly reinforcement piece	1
	Reinforcement piece for snap fasteners (waistband)	2

3.5 Construction .

3.5.1 Stitches, seams, and stitchings. The stitch, seam, and stitching types specified in table III shall conform to Fed. Std. No. 751. Whenever two or more methods of seams or stitchings are given for the same part of the operation, any one of them may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the garment. Unless otherwise specified, double needle stitching shall be 3/16 to 5/16 inch gage with the outer row of stitching 1/16 inch from turned edge on outside of garments. When safety-stitch construction is used, the width of the overedge stitch shall be 3/16 to 1/4 inch. Unless otherwise specified, raise stitching shall be 1/16 to 3/32 inch from the joining seam. Seam allowances shall be maintained with seams properly sewn so that no raw edges, run-off, twists, pleats, puckers, or open seams shall result.

3.5.2 Stitches per inch. The minimum or maximum stitches per inch shall be as specified in table III.

3.5.3 Thread breaks and ends of seams. The ends of all seams and stitching, when not caught in other seams and stitching, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch, except on labels where the overlap shall be not less than 3 stitches. Thread breaks shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 seaming may be repaired by using 301 stitch type.

3.6 Manufacturing operations requirements. The garment shall be manufactured in accordance with operations specified in table III. The supplier is not required to follow the exact sequence of operations. Any basting or holding stitching used to facilitate manufacture is permissible provided that the thread is removed and does not show on the finished garment.

3.7 Marking. The component parts shall be marked to insure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:33Z
Check the source to verify that this is the current version before use.

(a) Corrosive metal fastening devices.
(b) Sew-on type tickets.
(c) Adhesive type tickets which discolor or adhere to the material upon removal of the tickets.

3.8 Pressing. All pressing as required in table III shall be done with a heated pressing iron or pressing machine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE III	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
1	Cut garment. a. Cut garment in strict accordance with the patterns furnished which show size, directional lines and notches for proper assembly. Directional lines shall be in the warp direction. b. All parts shall be cut out of one piece of material except the front facings, neck facing (back), the snap fastener reinforcement pieces and fly reinforcement of the trousers, which may be cut from ends. c. Cut elastic webbing in lengths of six inches while in a relaxed position.					
2	Replacement of damaged parts a. Replace at time of cutting, any part containing hole or weakening defect such as smash, multiple float, or unsightly slub.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE III	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
2	b. Replace any part damaged during the manufacturing process, by needle chew, cut, tear, hole, burn or large exposed drill hole. (Unit containing a clearly visible mend will not be acceptable.)					
3	Shade marking.					
	a. Mark, ticket or bundle all component parts to insure correct size and uniform shade throughout the garment.					
	COAT					
4	Hem patch pocket.					
	a. Turn top of pocket with the raw edge turned in and stitch 1/16 to 1/8 inch from edge. The finished hem shall measure 1 ± 1/8 inches wide.	301	EFb-1	8-12	50	50
5	Join front and neck facings.					
	a. Seam neck facing to front facings at shoulder and spread seams open.	301	SSa-1	8-12	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:33Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE III	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
6	Attach labels.					
	a. Center combination label on neck facing 1/2 to 5/8 inch down from top finished edge and so it can be seen on inside of finished garment. Stitch on all four sides. (1/4 inch off center tolerance allowed.) When a heat sealable label is used, it may be applied by heat sealing.	301	LSbj-1	8-12	50	50
	b. Position instruction label below and in line with the combination label. Stitch on all four sides.	301	LSbj-1	8-12	50	50
	c. The labels shall be so positioned on the finished garment that the stitching shall not appear through the back of the garment.					
7	Sew on left breast patch pocket.					
	a. Turn in edges of patch pocket and stitch to left front, as indicated by marks on pattern, 1/16 to 1/8 inch from turned edges (may be precreased).	301	EFb-1	8-12	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T09:33Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE III	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
	b. Tack sides of the pocket opening the width of the hem with a row of stitching 1/8 to 1/4 inch from the first row of stitching. This operation may be accomplished in "7a" above. c. Finished pocket shall measure 6 ± 1/4 inches deep at the center and 5-1/2 ± 1/8 inches wide.	301	SSa-1	8-12	50	50
8	Join shoulder seams.					
	a. Join shoulder seams with double-lapped, double stitched seams with the back of the coat on top of the front.	301 or 401	LSc-2 LSc-2	8-12 8-12	50 50	50 70
	or					
	b. Join shoulder seams by using safety-stitch.	515 or 516 or 519 or	SSa-2	8-12	50 (Chain stitch) and 70 (overedging)	70 70
		517 or 518	SSa-2	8-12	50 (lock stitch)	70

Source: https://assist.dla.mil -- Downloaded: 2024-10-21T09:33Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE III	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
9	Attach facings and reinforcement pieces to fronts.					
	a. Place reinforcement pieces on facings even at front and top. Seam facings and reinforcement pieces to coat.	301 or 401	SSa-1 SSa-1	8-12 8-12	50 50	50 70
	b. Turn, workout edges, turn in back edges and stitch to coat 1/16 to 1/8 inch from edge catching back edge of reinforcement pieces in the turned in edge.	301		8-12	50	50
	c. Single stitch edges of neck and fronts 1/16 to 1/8 inch from front edges.	301	SSe-2(b) (shows finished seam)	8-12	50	50
10	Set in sleeves.					
	a. Join the sleeves to the armholes with double-lapped, double-stitched seams; fronts and backs shall be over the sleeves.	301 or 401	Lsc-2 LSc-2	8-12 8-12	50 50	50 70
	or					
	b. Set sleeves by using safety-stitch.	515 or 516 or 519 or	SSa-2	8-12	50 70	70 (Chain stitch) and 70 (overedging)
		517 or 518 or	SSa-2	8-12	50 70	70 (lock stitch) 70 (overedging)

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T09:33Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE III	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
11	Join side and underarm seams.					
	a. Join side and underarm seams with double-lapped, double-stitched seams, the fronts shall be over the back.	301 or 401	LSc-2 LSc-2	8-12 8-12	50 50	50 70
	or					
	b. Join side and underarm seams by using safety-stitch.	515 or 516 or 519 or	SSa-2	8-12	50 70	70 (chain stitch) and 70 (overedging)
		517 or 518 or	SSa-2	8-12	50 70	70 (lock stitch) 70 (overedging)
12	Hem bottom of coat.					
	a. Turn the bottom of coat with the raw edge turned in and stitch 1/16 to 1/8 inch from edge. Hem shall be over the facing and shall finish ± 1/8 inch wide.	301	EFb-1	8-12	50	50
13	Hem sleeves.					
	a. Turn the bottom of the sleeve with the raw edges turned in and stitch 1/16 to 1/8 inch from edge. Hem shall finish 1 ± 1/8 inch wide.	301	EFb-1	8-12	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T09:33Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE III	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
14	Attach snap fasteners.					
	a. Attach socket part of snaps to the left front through three pieces of basic material as indicated by marks on pattern.					
	b. Attach stud part of snaps to the right front through three plies of basic material as indicated by marks on pattern.					
15	Clean and press coat.					
	a. Trim all thread ends and remove all loose threads from coat.					
	b. Remove all spots, stains, and shade tickets.					
	c. Press neatly.					
	TROUSERS					
16	Join seat seam and outseams.					
	a. Join the seams with double-lapped, double-stitched seams.	301 or	LSc-2	8-12	50	50
		401	LSc-2	8-12	50	70
	or					

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T09:33Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE III	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
16	b. Join seat seams and outseems by using Safety-Stitch.	515 or 516 or 519 or	SSa-2	8-12	50	70 (chain stitch) and
					70	70 (overedging)
		517 or 518	SSa-2	8-12	50	70 (lock stitch)
					70	70 (overedging)
17	Attach elastic webbing. Finished appearance. The elastic webbing shall be centered on the outseams and positioned so to finish inside and centered on the finished hem. a. With the elastic webbing centered on the outseams, stretch the webbing to eight inches and center on outseams (3/8 inch off center tolerance allowed). Place a vertical bartack 1-1/8 to 1-3/8 inches long at each end of the stretched elastic webbing.	Bartack		64 per bartack	50	50

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T09:33Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE III	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
18	Hem top of trousers. a. Turn top of trousers to inside with the raw edges turned in, and with the waistband reinforcement pieces positioned so to provide reinforcement for snap fasteners (see marks on pattern for position of snap fasteners). Double stitch through trousers the top and bottom of waistband hem. The finished hem shall measure 1-1/2 inches ± 1/4 inch wide.	301		8-12	50	50
19	Make front openings. a. Turn cut-on facing for right front fly opening to the inside as indicated by marks on pattern, and enclosing the snap fastener reinforcement piece. Turn in raw edge and stitch through trousers 1/16 to 1/8 inch from edge. The finished fly shall measure 1-1/2 inches ± 1/4 inch wide.	301		8-12	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE III	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
19	b. Turn cut-on facing for left front fly opening to the inside as indicated by marks on pattern, and stitch through trousers 1/16 to 1/8 inch from edge. The left fly shall finish 3 plies and shall measure 1-3/4 inches ± 1/8 inch wide.	301		8-12	50	50
20	Join crotch seam.					
	a. Join crotch seam with a double-lapped, double-stitched seam.	301 or 401	LSc-2 LSc-2	8-12 8-12	50 50	50 70
	OR					
	b. Turn crotch seam of right front to the outside and stitch 1/16 to 1/8 inch from edge.	301 or 401	EFa-1 EFa-1	8-12 8-12	50 50	50 70
	AND					
	c. Turn crotch seam of left front crotch to inside and double stitch to the right front catching the right front crotch in both rows of stitching. Continue one row of stitching to 1-1/2 inches ± 1/4 inch above crotch, across width of fly and back down to crotch, forming a triangle of stitching.	301 or 401	LSd-2 LSd-2	8-12 8-12	50 50	50 50

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T09:33Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE III	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
	OR					
20	d. Join crotch seams by using safety-stitch	515 or 516 or 519 or	SSa-2	8-12	50	70 (chain stitch)
					70	70 (overedging)
		517 or 518	SSa-2	8-12	50	70 (lockstitch)
						(overedging)
21	Attach crotch reinforcement piece.				70	70
	a. Superimpose the reinforcement tape over crotch seam even with the raw edge of inseam and extending 1/4 to 3/8 inch above the cross stitch at bottom of fly opening. Double stitch the tape to trousers up to the cross stitch.	301		8-12	50	50
	b. Place a horizontal bartack 1/2 to 5/8 inch at top of cross stitch.	Bartack		38 to 42 (per bartack)	50	50

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T09:33Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE III	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
22	Join inseams.					
	a. Join the inseams with double-lapped, double-stitched seams.	301 or 401	LSc-2 LSc-2	8-12 8-12	50 50	50 70
	OR					
	b. Join inseams by using safety-stitch.	515 or 516 or 519	SSa-2	8-12	50	70 (chain stitch)
					70	70 (overedging)
		517 or 518	SSa-2	8-12	50	70 (lock stitch)
					70	70 (overedging)
23	Hem bottom of trousers.					
	a. Turn up bottom of trousers with raw edges turned in and stitch through trousers 1/16 to 1/8 inch from edge. Finished hem shall measure 1 ± 1/8 inch wide.	301	EFb-1	8-12	50	50
24	Attach labels.					
	a. Position the combination label 1/2 to 3/4 inch to the left side (right side as worn) of the	301	LSbj-1	8-12	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:33Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE III	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
24	a. (cont'd) seat seam not more than 1/4 inch below the waistband hem, and stitch on all four sides. When a heat sealable label is used, it may be applied by heat sealing. b. Position instruction label adjacent to combination label and stitch on all four sides. NOTE: Top of label(s) may be caught in trousers waistband hem stitching in operation 18a, with remaining three sides stitched.	301	LSbj-1	8-12	50	50
25	Attach snap fasteners. a. Attach socket part of snap fastener at left front opening as indicated by marks on pattern. Snap shall be through a minimum of three thicknesses of material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE III	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
25	b. Attach stud part of snap fastener at right front opening as indicated by marks on patttern to effect a smooth closure. Snap shall be through a minimum of three thicknesses of material.					
26	Clean and press trousers. a. Trim all thread ends and remove all loose threads. b. Remove all spots, stains and shade tickets. c. Press neatly.					

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T09:33Z
Check the source to verify that this is the current version before use.

3.9 Sizes and measurements. The finished pajama coat and trousers shall conform to the measurements and tolerances as shown in tables IV and V. Measurements and tolerances are expressed in inches.

Table IV. Pajama, coat

Measurement	Extra Small	Small	Medium	Large	Extra Large	Tolerance
1/2 Chest 1/	21	23	25	27	29	± 3/4
Back length 2/	27-1/2	28	28-1/2	29	29-1/2	± 1/2
Sleeve length 3/	31	32	33	34	35	± 1/2

1/ 1/2 Chest measurement taken from folded edge to folded edge at base of armhole (when snaps are closed).

2/ Back length measurement taken from top edge of neck at center back to bottom of coat.

3/ Sleeve length measurement taken from center of back at neck, diagonally across back and down along sleeve to bottom edge.

Table V. Pajama, trousers

Measurement	Extra Small	Small	Medium	Large	Extra Large	Tolerance
1/2 Waist (relaxed) 1/	15	17	19	21	23	± 1/2
1/2 Waist (stretched) 2/	17	19	21	23	25	Minimum
1/2 Seat 3/	20	22	24	26	28	± 3/4
Inseam 4/	28	28-1/2	29	29-1/2	30	± 1/2
1/2 Bottom of leg 5/	9-1/4	9-1/2	10	10-1/2	11	± 1/4

1/ 1/2 Waist (relaxed). Measure from side to side along top edge of waist.

2/ 1/2 Waist (stretched). Measure from side to side along top edge of waist with the waistband stretched taut in straight line using manual tension.

3/ 1/2 Seat measurement taken from folded edge to folded edge at point in line with tacking of lower end of fly opening.

4/ Inseam measurement taken along inseam from crotch seam to bottom edge.

5/ 1/2 Bottom of leg measurement taken from folded edge to folded edge at bottom of trouser leg.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

3.10 Workmanship. The finished pajama coats and trousers shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Inspection for acceptance. Inspection shall be conducted in accordance with MIL-STD-105, unless otherwise indicated.

4.2.1 Component and material testing. - In accordance with 4.1 above, components shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this purchase description or applicable purchase document. In addition, testing shall be performed on components listed in Table VI for characteristics noted. Whenever applicable, tests shall be conducted in accordance with methods prescribed in FED-STD-191 and as listed in table VI. All requirements are applicable to the sample unit. All test reports shall contain the individual values used in expressing the final results.

4.2.2 Sampling for testing.- Unless otherwise specified in a subsidiary specification, the sampling for testing shall be as specified below:

Lot size (lot unit)	Sample size (sample unit)
800 or less	2
801 or 22,000 inclusive	3
22,001 and over	5

The lot shall be unacceptable if one or more units fail to meet any test requirement specified. The sample unit shall be 3 continuous yards full width of the finished cloth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

Table VI - Test Methods

Characteristic	Requirement Paragraph	Test Method
Base cloth:		
Polyester identification	3.1.1.1	1/
Cotton identification	3.1.1.2	1/
Cotton - combed or well carded	3.1.1.2	1/
Fiber content:		
Polyester-percent	3.1.2	4.4
Weave	3.1.3.1	Visual 1/
Nonfibrous Materials	3.1.3.9	2611
Yarns per inch:		
Warp	3.1.3.2	5050
Filling	3.1.3.2	5050
Breaking strength:		
Warp	3.1.3.2	5100
Filling	3.1.3.2	5100
Shrinkage	3.1.3.10	5550
Weight	3.1.3.2	5041
pH	3.1.3.8	2811
Sulfur content	3.1.3.4	2020
Mercerized and singed	3.1.3.7	Microscopic 1/
Colorfastness:		
Laundering (3 cycles)	3.1.3.6	5610 3/
Crocking	3.1.3.6	5651
Perspiration	3.1.3.6	5680
Light	3.1.3.6	5660
Label combination:		
Material identification	3.1.8	1200
Weight 1 lb. (45 inch)	3.1.8	5041 1/
Adhesion	3.1.8	5605 2/
Color	3.1.8.1	Visual
Snap fastener:		
Material identification	3.1.7	1/

1/ Unless otherwise specified a certificate of compliance shall be submitted and will be acceptable for the stated requirement.

2/ One determination shall be made after 8 successive launderings. The test shall be performed with the specified label material (3.1.8) and the specified base material (3.1.3).

3/ For method 5610 - 3 laundering cycles shall be performed with the test specimens dried after each of the 3 laundering cycles. Only the stain on the cotton fiber of the color transfer cloth shall be evaluated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

4.3 Polyester fiber content.-

4.3.1 Test specimen.- The specimen shall be approximately 2 grams made up of yarns ravelled from the cloth sample and cut into approximately 1/4 inch lengths.

4.3.2 Apparatus, reagents, method cited.-
Apparatus as described in Method 2611.
Sintered glass filter of crucible coarse porosity.
Hydrometer.
Sulfuric acid, 74 percent (density 1.67) prepared by pouring 350 cubic centimeters (cc.) of water in a round-bottom flask, then adding 680 cc. of concentrated sulfuric acid slowly, with cooling under the tap. The density of the solution is adjusted to 1.67 using a hyrometer.
Sulfuric acid, dilute (100 cc. of concentrated sulfuric acid added to 1900 cc. of water).

4.3.3 Procedure. The nonfibrous material shall be removed as specified in Method 2611. The desized specimen shall be dried to a constant weight, cooled in a desiccator and weighed. The specimen shall then be immersed in 200 cc. of 75 percent solution of sulfuric acid for 1 hour with intermittent stirring. The residual fibers shall be transferred to the glass crucible and the excess acid solution removed by suction. The residual fibers shall be washed on the fiber filter successively with dilute sulfuric acid, water, dilute ammonia solution (soak for ten minutes) and again with water (soak for ten minutes). After each separate washing, the crucible is drained by suction. The residue shall be dried to a constant weight in the air oven at 105° to 110° C. This is the "weight of the dry polyester fiber" in the specimen.

4.3.4 Result.- The percentage of polyester fiber shall be based on the following equation:

$$\text{Polyester fiber, percent} = \frac{\text{Weight of dry polyester fiber}}{\text{Weight of dry desized specimen}} \times 100$$

4.3.5 Two specimens shall be tested from each sample unit and the polyester fiber content shall be the average of the results obtained from the specimen tested and shall be reported to the nearest 1.0 percent.

4.4. Examination of the end item. The end item shall be examined for defects listed in 4.4.2 through 4.4.4. The applicable inspection level and acceptable quality levels (AQL's) shall be as specified in 4.5. The sample unit unit shall be one pajama coat or trousers.

4.4.1 Classification of defects. All defects shall be classified in accordance with list shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

4.4.2 General defects.

Defect	Classification Major	Minor
Material defects and damages		
a. Any hole, smash, mulitiple float, loose slub or burn.	X	
b. Needle chew, cut or tear.	X	
c. Mend clearly visible.		X
Component and assembly		
Any component part or required operation omitted.	X	
Cutting		
Any component part not cut in conformance with specification requirements.	X	
Shaded parts		
a. Any outside part shaded.		X
Cleanness		
a. Any spot or stain on outside.		X
b. Thread ends not trimmed, shade tickets or loose threads not removed throughout garment, or shade marks visible on outside.		X
c. Any visible basting stitch.		X
Pressing		
a. Pressing omitted.		X
Seams and stitching.		
a. Accuracy of seaming		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

Defect	Classification	
	Major	Minor
Seams and stitching (cont'd.)		
1. Seams twisted, puckered, or pleated.		X
2. Part of material caught in unrelated operation.		X
3. End(s) of stitching, when not caught in other seams or stitching, backtacked less than 1/4 inch.		X
4. Thread breaks stitched less than 1/2 inch beyond each end of break.		X
5. Ends of a continuous line of stitching overlapped less than 1/2 inch.		X
6. Wrong shade of thread.		X
b. Gage of stitching - (edge or raised stitching)		
1. Irregular, unevenly gaged or not uniform.		X
2. Beyond range of width specified, or varies more than 1/16 inch when no range is specified.		X
c. Open seams		
1. All seams except bottom and leg hems:		
- up to 1 inch		X
- over 1 inch.	X	
2. On bottom and leg hems, more than 1 inch.		X

NOTE: Broken or continuous skipped or run-off stitches constitute an open seam. A double-stitched seam is considered open when either side of the seam is open.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
d. Raw edges (on outside)		
- 1/2 inch to 1 inch, inclusive		X
- over 1 inch.	X	
e. Run-offs		
1. On joining seams, when resulting in an open seam, score as an open seam.		
2. On outside raised or top stitching, when not resulting in an open seam:		
- over 1 inch		X
f. Seam and stitch type		
1. Wrong seam or stitch type.		X
2. Looper thread exposed on outside of garments when stitch type 401 is used.	X	
g. Stitch tension		
1. Loose tension, resulting in a loose seam.		X
2. Loose tension, on edge or raise stitching resulting in loosely exposed bobbin or top thread.		X
3. Tight tension (stitches break when normal strain is applied to seam or stitching).	X	
h. Stitches per inch		
Stitches less than minimum specified		
- 1 or 2 stitches.		X
- more than 2 stitches.	X	
Any number of stitches in excess of maximum specified.		X

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:33Z
Check the source to verify that this is the currentversion before use.

Defect	Classification Major	Minor
1. Stitches skipped or broken on edge or raise stitching (when seam is seamed, turned and stitched) and top stitching. - over 3/4 inch.		X
Snap fasteners (all)		
Missing, loose, mismated, bent, broken, or otherwise defective, affecting function:		
- 1 snap fastener.		X
- 2 or more snap fasteners.	X	
Labels - combination and instruction		
a. Missing, incorrect or illegible.	X	
b. Not in proper location on coat or trousers.		X
c. Not stitched on all four sides, when applicable.		X
d. Stitches showing through back of coat, when applicable.		X
e. Not specified color.		X
f. Not securely attached (when heat sealed).		X

4.4.3 Detailed defects applicable to specific parts.

Defect	Classification Major	Minor
COAT		
Fronts		
a. Uneven at bottom when fastened, by over 1/2 inch.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

Defect	Classification	
	Major	Minor
COAT (cont'd.)		
Pocket		
a. Corners not securely tacked.		X
b. Hem less than 7/8 inch or more than 1-1/8 inches wide.		X
c. Less than 5-3/8 inches or more than 5-5/8 inches wide.		X
d. Less than 5-3/4 inches or more than 6-1/4 inches deep at center.		X
Shoulder joining		
a. Front on top of backs.		X
Facings and reinforcement pieces		
a. Twisted, pleated or puckered, causing distortion on outside.	X	
b. Omitted.	X	
c. Back edge of reinforcement piece not caught in turned in edge of facing.		X
d. Front edges of facings not worked out.		X
Side seams and underarm seams		
a. Backs on top of fronts.		X
Sleeves and armholes		
a. Sleeves overlapping fronts and back at armhole seam.	X	
b. Sleeve hem less than 7/8 inch or more than 1-1/8 inches wide.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
Bottom hem		
a. Less than 7/8 inch or more than 1-1/8 inches wide.		X
b. Hem not over facing.		X
Snap fasteners		
a. Out of vertical alignment by 1/4 inch or more.	X	
b. Not properly positioned.	X	
Snap fastener reinforcement piece		
a. One or more snap fasteners not caught through a minimum of three thicknesses of material.		X
TROUSERS		
Front opening		
a. Flies uneven in length by over 1/2 inch		X
b. The right finished fly facing less than 1-1/4 inches or more than 1-3/4 inches wide.		X
c. The left finished fly facing less than 1-5/8 inches or more than 1-7/8 inches wide.		X
d. Fly facings finishing less than three plies.		X
e. Cross stitching at base of fly less than 1-1/4 inches or more than 1-3/4 inches above top of crotch seam.		X

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:33Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
Snap fastener		
a. Snap fastener not caught through at least three plies of fabric.		X
b. Not positioned properly.		X
Crotch reinforcement piece		
a. Omitted.	X	
b. Tape not extending to cross stitch of fly.		X
c. Tape not caught completely in bartack (width).		X
Waistband hem		
a. Waistband reinforcement piece omitted.		X
b. Less than 1-1/4 inches or more than 1-3/4 inches wide.		X
c. Elastic webbing omitted.	X	
Leg hems		
a. Less than 7/8 inch or more than 1-1/8 inches wide.		X

4.4.4 Size measurements.

	COAT
1/2 chest Back length	- Any measurement deviating from nominal dimensions and tolerance specified in table III shall be classified as a defect.
Sleeve length	- Sleeve lengths uneven by 3/4 inch or more shall be classified as a defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

4.4.4 Size measurements (cont'd.)

	TROUSERS
1/2 waist 1/2 seat Inseam	- Any measurement deviating from nominal dimension and tolerance specified in table IV shall be classified as a defect.

4.5 Acceptable quality levels and inspection levels. The inspection levels and acceptable quality levels, expressed in defects per hundred units (DHU) shall be as follows:

	AQL's	Inspection levels
For defects listed in 4.4.2 and 4.4.3		II
Major	2.5	
Total	10.0	
For defects listed in 4.4.4		S-3
One class	4.0	

4.6 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing. Any component not as specified. Any component damaged, affecting serviceability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

Examine	Defect
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, inadequate stapling. Bulged or distorted container. Open and non-continuous heat sealed seams and closure of polyethylene bag. Omission of vent hole in polyethylene bag.
Content	Number of interior packages per shipping container more or less than required.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Unit of issue. One coat or one pair of trousers, as specified, constitutes one unit of issue.

5.1.2 Level A.

5.1.2.1 Folding.

5.1.2.1.1 Coat. Each fastened coat shall be laid front down, the sides and sleeves folded in over the back and the bottom brought up to the shoulders to approximate dimensions of 12 by 12 inches. The size label shall be clearly visible in front so as to permit ready identification. Each folded coat shall be individually inserted in a snug-fitting polyethylene bag as hereinafter specified.

5.1.2.1.2 Trousers. Each pair of trousers shall be neatly folded to approximate dimensions of 12 by 12 inches.

5.1.2.2 Polyethylene bag. The bag shall be flat style, made of clear polyethylene film of 0.00125 inch thickness (± 20% tolerance). The bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. Alternatively, the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:33Z
Check the source to verify that this is the current version before use.

5.1.3 Level C. Coats only, or trousers only shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Coat. Eighty coats of one type and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, V2s of PPP-B-636. The inside of each container shall be fitted with a taped liner conforming to V3c of PPP-B-636. Level A packages shall be packed flat, two in length one in width and forty in depth within a shipping container. Inside dimensions of each container shall approximate 23 inches in length, 12 inches in width and 20 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each container shall be closed, waterproofed, and reinforced with flat strapping or tape banding in accordance with the appendix of the container specification. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of one type may be packed within the same container.

5.2.1.2 Trousers. Eighty pairs of trousers of one type and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping continaer conforming to style RSC-L, V2s of PPP-B-636. The inside of each container shall be fitted with a taped liner conforming to V3c of PPP-B-636. Level A packages shall be packed flat, two in length, one in width and forty in depth within a shipping container. Inside dimensions of each container shall approximate 23 inches in length, 12 inches in width and 13 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each container shall be closed, waterproofed, and reinforced with flat strapping or tape banding in accordance with the appendix of the container specification. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of one type may be packed within the same container.

5.2.2 Level B.

5.2.2.1 Coat. Eighty coats of one type and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF or SF, variety SW, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, variety SW, class domestic, grade 275 of PPP-B-636. Level A packages shall be packed two in length, one in width and forty in depth within a shipping container. Inside dimensions of each container shall approximate 23 inches in length, 14-1/2 inches in width and 20 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

5.2.2.1 Coat (cont'd.)

covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each container shall be closed in accordance with method II as specified in the appendix of the container specification. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes of one type may be packed within the same container.

5.2.2.2 Trousers Eighty pairs of trousers of one type and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF or SF, variety SW, class domestic, grade 275 of PPP-B-636. The inside of each container shall be fitted with a taped liner conforming to type CF, variety SW, class domestic, grade 275 of PPP-B-636. Level A packages shall be packed flat, two in length, one in width and forty in depth within a shipping container. Inside dimensions of each container shall approximate 23 inches in length, 14-1/2 inches in width and 13 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each container shall be enclosed in accordance with method II as specified in the appendix of the container specification. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of one type may be packed within the same container.

5.2.3 Level C. Coats only, or trousers only, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with the rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129. The date of manufacture shall be shown in lieu of date packed.

5.3.1 Labels, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

5.3.2 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag information shall indicate the following information:

STOCK NUMBER
NOMENCLATURE
QUANTITY
SIZE
NAME AND ADDRESS OF MANUFACTURER
CONTRACT OR PURCHASE ORDER NO.
DATE OF MANUFACTURE.
INSTRUCTIONS AS SPECIFIED IN 3.1.8.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The pajama coats and trousers are intended to be worn by the bed patients in service hospitals.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Size required (see 1.2).
(c) When first article sample is required.
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) Whether V-board containers are required for level shipment (see 5.2.2.4).

6.3 Guide samples. For access to sample, address the procuring office issuing the invitation for bids.

6.4 Dyestuff formulation.

6.4.1 Blue-green 290. A suggested but not mandatory dyestuff formulation for Blue-Green 290 is as follows:

Vat Blue 67
Vat Red 10 - C. I. 67000

6.5 This specification does not include all types, classes, styles or sizes of the commodity indicated by the title of this specification, or which are commercially available, but is intended to cover the items, which are normally procured to meet military requirements.

6.6 This specification is intended to cover the following items appearing in the Federal Supply Catalog:

TROUSERS

NSN	Size
6532-00-081-1466	Extra Small
6532-00-081-1470	Small
6532-00-081-1666	Medium
6532-00-081-1680	Large
6532-00-081-1682	Extra Large

COATS

NSN	Size
6532-00-081-1683	Extra Small
6532-00-081-1801	Small
6532-00-081-1802	Medium
6532-00-081-1804	Large
6532-00-081-1807	Extra Large

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

Add the following paragraph:

"6.7 Symbols are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes."

Custodians:
Army - MD
Navy - MS
Air Force - 03

Review activities:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 6532-1065

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

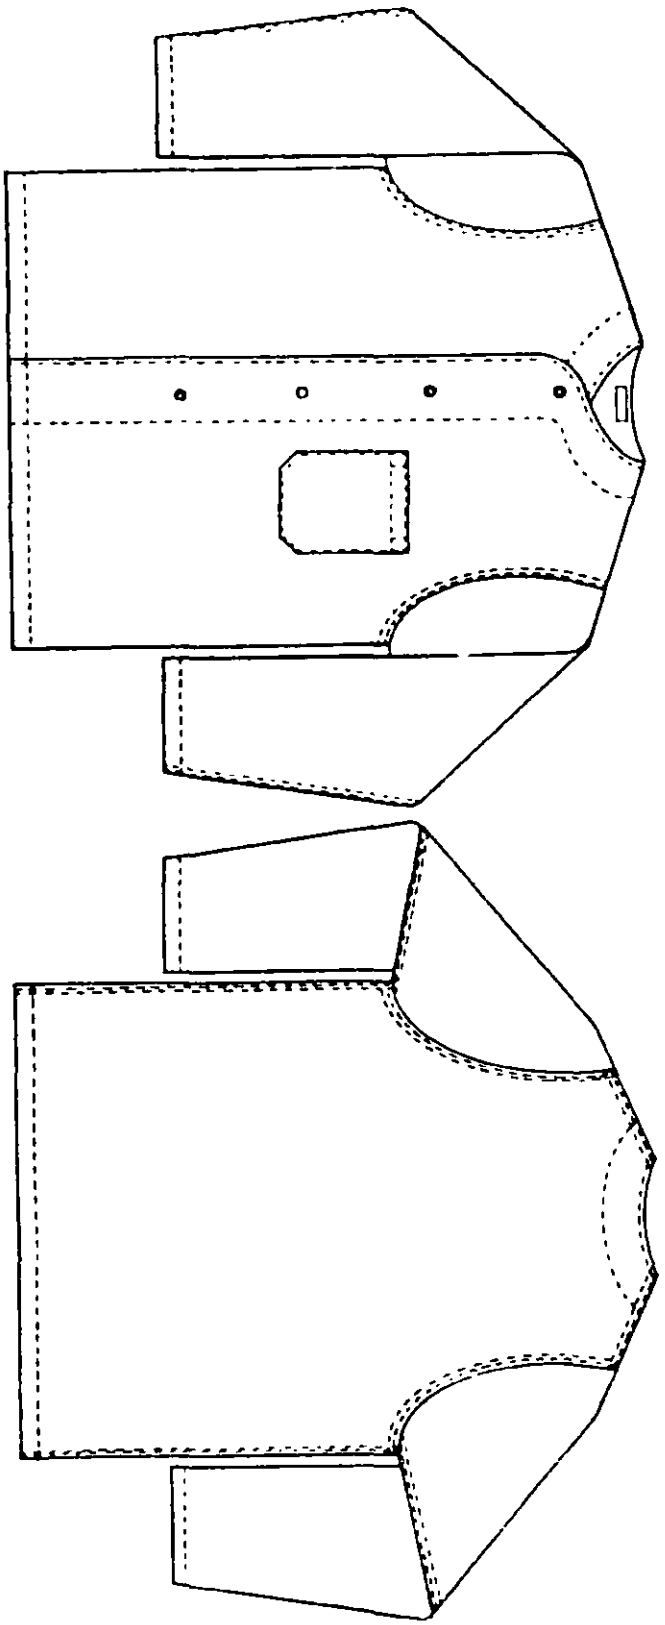


FIGURE 1. COAT, MAN'S PAJAMA

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

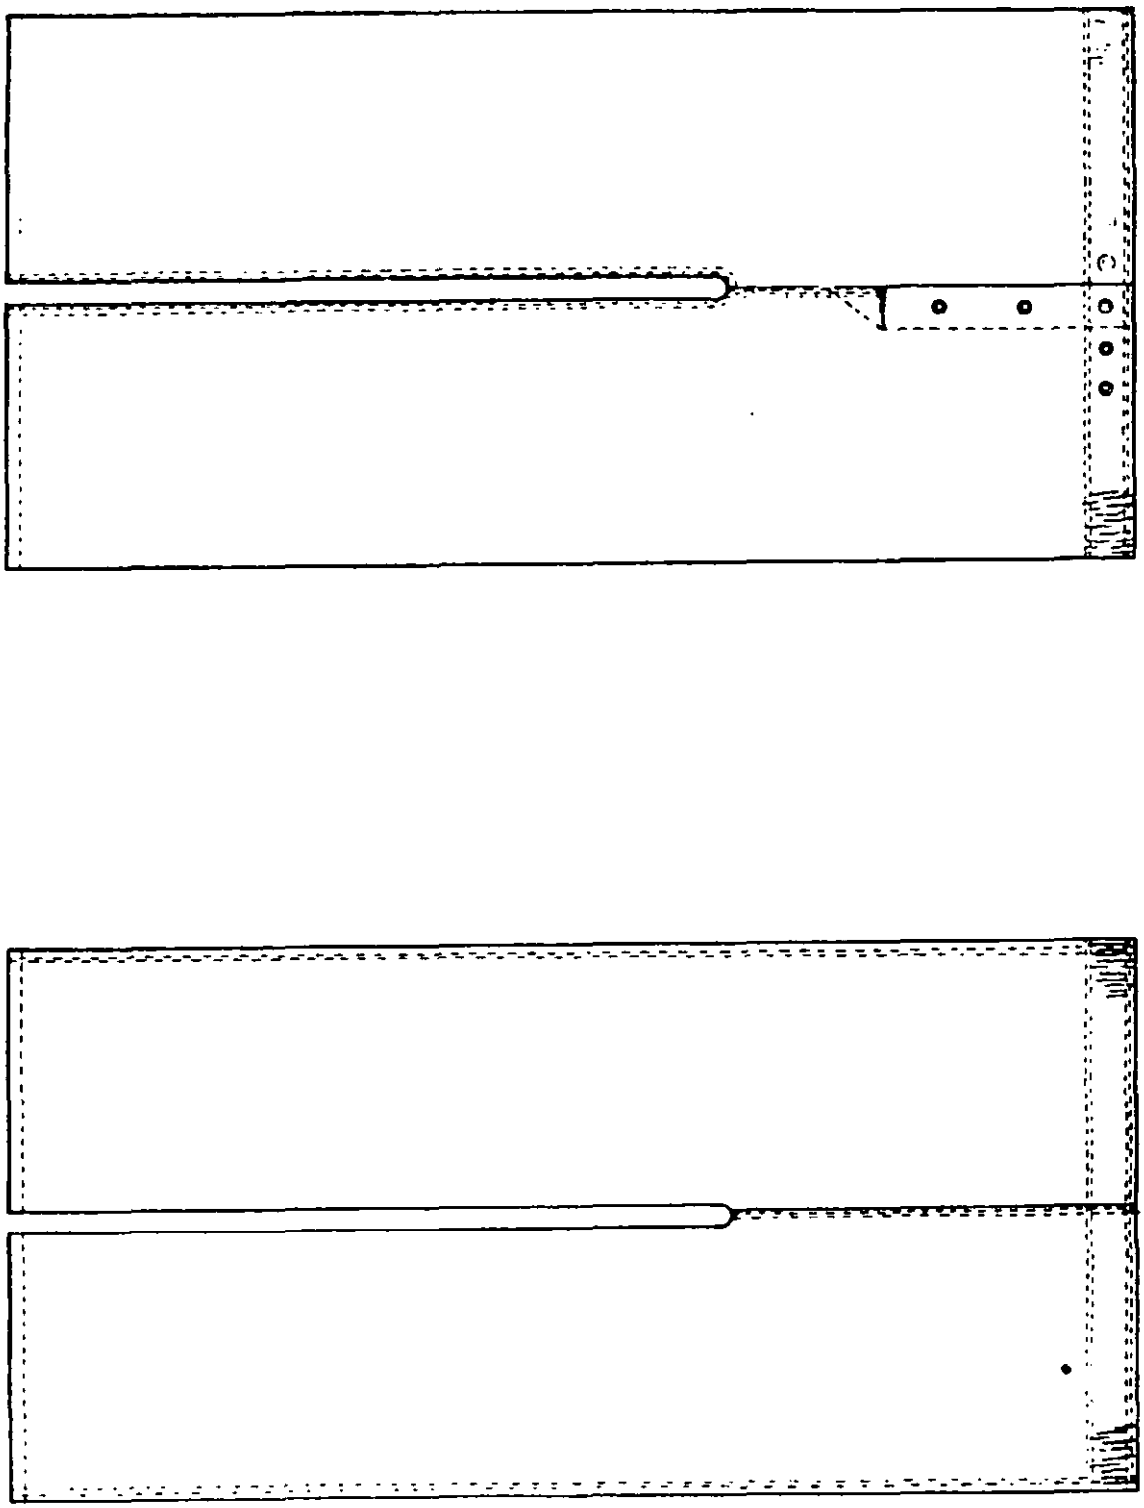


FIGURE 2 TROUSERS, MEN'S PAJAMA

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. *Enter in block 6 any remarks not related to a specific paragraph of the document.* If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEFENSE LOGISTICS AGENCY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 4966 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

Commander
Defense Personnel Support Center
ATTN: DPSC-ATTS
Philadelphia, PA 19101

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil – Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.