MIL-C-36904C
15 January 1993
SUPERSEDING
MIL-C-0036904B(DSA-DM)
25 August 1976
MIL-C-36904A
29 April 1976

MILITARY SPECIFICATION

COATS AND TROUSERS, PAJAMA, COTTON-POLYESTER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for hospital pajama coats and trousers.

1.2 Classification. The pajama coats and trousers shall be of the following types.

Type 1	-	Trousers
Type 2	-	Coats

The pajama coats and trousers shall be of the following sizes:

Size 1	-	Extra small
Size 2	-	Small
Size 3	-	Medium
Size 4	-	Large
Size 5	-	Extra large

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Headquarters, Defense Personnel Support Center, ATTN: Directorate of Medical Materiel, DPSC-MST, 2800 South 20th Street, Philadelphia, PA 19145, by using the self-addressed Standardization Document Improvement Proposal, (DD Form 1426) appearing at the end of this document or by letter.

AMSC/NA FSC 6532

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government Documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

Federal

JJ-W-155	-	Webbing, Textile, (Cotton, Elastic)
DDD-L-20	-	Label, for Clothing, Equipage, and Tentage, (General Use)
DDD-T-86	-	Tape, Textile, Cotton, General Purpose (Unbleached, Bleached, or Dyed)
PPP-B-601	-	Boxes, Wood, Cleated Plywood
PPP-B-621	-	Box, Wood, Nailed and Lock-corner
PPP-B-636	-	Box, Shipping, Fiberboard

Military

MIL-L-10547	-	Liner, Case, and Sheet, Overwrap, Water-Vaporproof or Waterproof, Flexible
MIL-F-10884	-	Fasteners, Snap
MIL-T-43548	-	Thread, Polyester, Cotton-Covered
MIL-T-43624	-	Thread, Polyester, Spun

STANDARDS

Federal

FED-STD-191	-	Federal Test Methods
FED-STD-751	-	Stitches, Seams, and Stitching

Military

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-794	-	Parts and Equipment, Procedures for Packaging of

Source: https://assist.dla.mil -- Downloaded: 202640-21T09:33Z
Check the source to verify that this is the currentversion before use.

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

Color Association of the United States, Inc.

Standard Color Card of America

(Application for copies should be addressed to the Color Association of the United States, Inc., 200 Madison Avenue, New York, NY 10016).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets, or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Materials.

3.1.1 Fibers.

3.1.1.1 Polyester fiber. The fiber shall be polyethylene glycol terephthalate.

3.1.1.2 Cotton. The cotton shall be combed or well carded.

3.1.2 Yarns. The warp and filling yarns shall be a singles blend of 50 plus or minus 3 percent polyester and the remaining percentage cotton, based on the dry weight of the desized and finished cloth.

3.1.3 Cloth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

3.1.3.1 Weave. The weave shall be a plain weave (broadcloth).

3.1.3.2 Physical requirements. The finished fabric shall conform to the requirements listed in Table I when tested as specified in Table VI.

TABLE I. Physical requirements.

Weight oz. sq. yd.	Yarns per inch minimum		Breaking strength pounds minimum	
Minimum	Warp	Filling	Warp	Filling
3.2	98	52	75	35

3.1.3.3 Color. The color shall be dyed blue 201.

3.1.3.4 Sulfur content. The use of sulfur dye or dyes containing elementary sulfur or sulfur compounds capable of oxidation to sulfuric acid is prohibited. The finished cloth shall contain no more than a trace of labile sulfur when tested as specified in Table VI.

3.1.3.5 Matching. The cloth shall be a good approximation to the standard sample under (North sky) daylight or artificial daylight, having a color temperature of 7500 degrees Kelvin and shall be a good approximation to the standard sample under incandescent lamplight at 2800 degrees Kelvin.

3.1.3.6 Colorfastness. The finished cloth shall show "fair" fastness to light, and "good" fastness to crocking, perspiration, and laundering (after 3 cycles). Tests shall be performed as specified in Table VI.

3.1.3.7 Finish. The cloth shall be mercerized and dyed. Following dyeing, the cloth shall be closely singed.

3.1.3.8 pH. The pH value of the water extract of the finished cloth shall be not less than 5.0 nor more than 9.0 when tested as specified in Table VI.

Source: https://assist.dla.mil -- Downloaded: 20264,0-21T09:33Z
Check the source to verify that this is the current version before use.

3.1.3.9 Nonfibrous materials. The starch and protein content including chloroform-soluble and water-soluble material of the finished cloth shall not exceed 2.0 percent when tested as specified in Table VI.

3.1.3.10 Shrinkage. The finished cloth shall not shrink nor elongate more than 2.0 percent in either the warp or the filling when tested as specified in Table VI. The pre-shrinking process used shall not be identified by name or trademark; either on the cloth, ticket, or package.

3.1.4 Thread. The thread for seaming and stitching shall be polyester, cotton covered, ticket Nos. 50, 2 ply and 70, 2 ply, conforming to MIL-T-43548. Spun polyester thread, ticket Nos. 50, 3 ply, and 70, 2 ply, conforming to class 1 or 2 of MIL-T-43624 may be substituted for the polyester, cotton-covered thread. The thread shall be dyed to match the base fabric. As an alternate, the shade shall conform to Department of Defense standard shades for sewing thread, 66029 light blue.

3.1.5 Tape, cotton. The cotton tape used to reinforce the crotch seam shall conform to type I or II of DDD-T-86, class 1 or 2, and shall be 5/8 inch wide with woven edges. The tapes shall be unbleached or bleached white.

3.1.6 Elastic webbing. The elastic webbing for the waistband shall be white, 1-1/4 inches wide, conforming to type I, class 9 of JJ-W-155.

3.1.7 Snap fasteners. The snap fasteners shall be 16 or 17 line, conforming to style 3 (pronged ring head type) of MIL-F-10884, except the metal shall be stainless steel of the 300 series. Each coat shall contain four socket and four stud parts. Each pair of trousers shall contain five socket and five stud parts.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:33Z
Check the source to verify that this is the current version before use.

3.1.8 Label. The combination identification and washing information label for each coat and trousers, as applicable, shall conform to DDD-L-20, Type VI, Class 1 and 3, Launderable Label, except that the color of the label shall be one of the following colors (in conformance with the Standard Color Card of America, (latest edition) for the appropriate coat or trouser size, as applicable:

Color	TCA Cable Number	Coat or Trousers Size
Tan	70128	Extra small
Peach blossom	70098	Small
Lemon yellow	70205	Medium
Indian orange	70072	Large
Primitive green	70167	Extra large

When inspected as specified in 3.1.3.5, the color of the label shall approximately match the crepe side of the applicable TCA Cable Number. The color of the label shall be obtained with vat or naphthol dyes and shall show at least "good" colorfastness to laundering transference and at least "fair" colorfastness to accelerated laundering. The color of the printing medium shall be black. The size of the label shall be adequate to contain the following:

COAT or TROUSERS, as applicable, MEN'S, PAJAMA, COTTON-POLYESTER
MIL-C-36904C
SIZE
CONTRACT or ORDER NUMBER
NSN
WOOL or FIBER PRODUCTS ACT INFORMATION
CONTRACTOR'S NAME

The above information shall be on the left side of the label (right side of the coat and trousers, as applicable, when worn) adjacent and separated from the washing information by a vertical line approximately 1/16 inch wide. The washing information shall be as follows:

WASHING INFORMATION

Close snap fasteners.
Machine wash, medium set.
Do not use chlorine bleach or starch.
Use fabric softener to whiten and to prevent clinging.
Tumble dry, medium set.
Remove from dryer immediately.
Little or no ironing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

The label shall state the appropriate size and material (extra small, small, medium, large, or extra large, 50 percent polyester and 50 percent cotton).

3.2 Design. The pajama coat shall have a front closure with 4 snap fasteners, a left breast patch pocket and one-piece sleeves (long). The coat shall be collarless, with neck facings. The pajama trousers shall have an adjustable elastic waistband and shall be closed with snap fasteners (see figures 1 and 2).

3.3 Figures. The figures are furnished for information only. To the extent of any inconsistencies between the written specification and the figures, the written specification shall govern.

3.4 Cutting. The coats and trousers, as applicable, shall be cut in strict accordance with the patterns furnished by the Government, which provide for seam allowance, size, shape, and placement of the pocket, location of the snap fasteners, directional lines for cutting, and notches for the proper assembling of all the parts. The Government patterns shall not be altered in any manner and shall be used for making the working patterns. The working patterns shall be identical to the Government furnished patterns. The component parts shall be cut from the same ply of the lay. Unless otherwise specified, the patterns provide a seam allowance of 1/2 inch for all double needle double lapped and safety seam stitching and 3/8 inch for the other seams. When safety stitching construction is used, the 1/2 inch seam allowance shall be maintained but the finished seam allowance shall measure 3/8 to 7/16 inch.

3.4.1 List of pattern parts. The component parts of the coat and trousers shall be cut from the specified materials in accordance with the number of parts required.

TABLE II. List of pattern parts.

Material	Pattern nomenclature	Cut parts
	Coat	
Cloth, polyester/cotton broadcloth	Front	2
	Back	1
	Sleeve (one piece)	2
	Pocket	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

TABLE II. List of pattern parts - Continued.

Material	Pattern nomenclature	Cut parts
	Trousers	
	Front	2
	Back	2
	Right fly reinforcement piece	1
	Reinforcement piece for snap fasteners (waistband)	2

3.5 Construction.

3.5.1 Stitches, seams, and stitchings. The stitch, seam, and stitching types specified in table III shall conform to Fed. Std. No. 751. Whenever two or more methods of seams or stitchings are given for the same part of the operation, any one of them may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the garment. Unless otherwise specified, double needle stitching shall be 3/16 to 5/16 inch gage with the outer row of stitching 1/16 from turned edge on outside of garments. Unless otherwise specified, raise stitching shall be 1/16 to 3/32 inch from the joining seam. Seam allowances shall be maintained with seams properly sewn so that no raw edges, run-off, twists, pleats, puckers, or open seams shall result.

3.5.2 Stitches per inch. The minimum or maximum stitches per inch shall be as specified in table III.

3.5.3 Thread breaks and ends of seams. The ends of all seams and stitching, when not caught in other seams and stitching, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch, except on labels where the overlap shall be not less than 3 stitches. Thread breaks shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 seaming may be repaired by using 301 stitch type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

3.6 Manufacturing operations requirements. The garment shall be manufactured in accordance with operations specified in table III. The supplier is not required to follow the exact sequence of operations unless otherwise specified. Any basting or holding stitching used to facilitate manufacture is permissible provided that the thread is removed and does not show on the finished garment.

TABLE III. Manufacturing operations requirements.

No.	Requirements (Including stitch and seam type)	Thread	
		Needle	Bobbin or Looper
1.	Cut garment. a. Cut garment in strict accordance with the patterns furnished which show size, directional lines and notches for proper assembly. Directional lines shall be in the warp direction. b. The waistband and snap fastener reinforcement pieces and the fly reinforcement of the trousers may be cut from the ends. c. Cut elastic webbing in lengths of six inches while in a relaxed position.		
2.	Replacement of damaged parts. a. Replace at time of cutting, any part containing hole or weakening defect such as smash, multiple float, or unsightly slub.		

Note: All type stitches shall be B-12 stitches per inch except where bartack is specified. The elastic webbing bartack shall be 64 stitches per bartack. The crotch reinforcement bartack shall be 38 to 42 stitches per bartack.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing operations requirements - Continued.

No.	Requirements (Including stitch and seam type)	Thread	
		Needle	Bobbin or Looper
2.	b. Replace any part damaged during the manufacturing process, by needle chew, cut, tear, hole, burn or large exposed drill hole. (Unit containing a clearly visible mend shall not be acceptable.)		
3.	Shade marking.		
	a. Mark, ticket or bundle all component parts to insure correct size and uniform shade thoughout the garment.		
	Coat		
4.	Hem patch pocket.		
	a. Turn top of pocket with the raw edge turned in and stitch 1/16 to 1/8 inch from edge. The finished hem shall measure 1 plus or minus 1/8 inches wide. (Stitch 301, Seam EFb-1)	50	50
5.	Attach labels.		
	a. Center combination label 1/2 to 5/8 inch down from top finished edge so it can be seen on inside of finished garment. Stitch on all four sides. (1/4 inch off center tolerance allowed.) If desired, the top edge of the combination label may be caught in the bias binding seam. Attach the remaining three	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing operations requirements - Continued.

No.	Requirements (Including stitch and seam type)	Thread	
		Needle	Bobbin or Looper
	sides. The stitching shall not be through the printing. (Stitch 301, Seam LSbj-1)		
6	Sew on left breast patch pocket.		
	a. Turn in edges of patch pocket and stitch to left front, as indicated by marks on pattern, 1/16 to 1/8 inch from turned edges (may be precreased). As an alternate to the tacking, operation 6B, continue the stitching across the top of the pocket, at each side of the pocket opening, for a distance of 3/16 to 1/4 inch, and down to the stitching of the pocket hem diagonally or in a straight line. (Stitch 301, Seam LSd-1)	50	50
	b. Tack sides of the pocket opening the width of the hem with a row of stitching 1/8 to 1/4 inch from the first row of stitching. This operation may be accomplished in "6a" above. (stitch 301, seam LSd-1)	50	50
	c. Finished pocket shall measure 6 plus or minus 1/4 inches deep at the center and 5-1/2 plus or minus 1/8 inches wide.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing operations requirements - Continued.

No.	Requirements (Including stitch and seam type)	Thread	
		Needle	Bobbin or Looper
7.	Join shoulder seams.		
	a. Join shoulder seams with double-lapped, double stitched seams with the back of the coat on top of the front. (Stitch 301 or 401, seam LSc-2)	50 (301) (401)	50 70
	or		
	b. Join shoulder seams by using safety-stitch. (Stitch 512, 515, 516, 517, 518, or 519, seam SSa-2)	50 (515,516,519) (Chain stitch) and 70 (overedging)	70
		50 (517,518,512) (lock stitch)	70
8.	Bind the front and neck edges.		
	a. The cut edges of the front opening and neck edges shall be sewn within the folds of a single strip of bias binding tape. The bias binding tape shall be folded in half longitudinally with the cut edges turned under. The tape shall be attached to the coat with one row of stitches 1/16 to 1/8 inch from the turned edge. The width of the attached bias binding tape shall be 7/8 to 1-1/8 inches. The cut ends of the tape shall be at the bottom of the coat so as to be enclosed in the bottom hem, operation 12a. (Stitch 301, seam BSc-1)	50/2	50/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing operations requirements - Continued.

No.	Requirements (Including stitch and seam type)	Thread	
		Needle	Bobbin or Looper
	b. The bias binding tape shall be fabricated from the polyester-cotton cloth, 3.1 through 3.1.3.10, cut on a bias or 45 degrees of sufficient width to comply with operation number 9a.		
9.	Set in sleeves.		
	a. Join the sleeves to the arm-holes with double-lapped, double-stitched seams; fronts and backs shall be over the sleeves. (Stitch 301 or 401, seam LSc-2)	50 (Stitch 301) 50 50 (Stitch 401) 70	
	or		
	b. Set sleeves by using safety-stitch. (Stitch 512, 515, 516, 517, 518, or 519 seam SSa-2)	50 (515,516,519) 70 (Chain stitch) and 70 | 70 (overedging) 50 (517,518,512) 70 (lock stitch) 70 | 70 (overedging)	
10.	Join side and underarm seams.		
	a. Join side and underarm seams with double-lapped, double-stitched seams, the fronts shall be over the back. (Stitch 301, or 401, seam LSc-2)	50 (301) 50 50 (401) 70	
	or		
	b. Join side and underarm seams seams by using safety-stitch. (Stitch 512, 516, 517, 518, and 519, seam SSa-2).	50 (515,516,519,512)70 (chain stitch) and 70 | 70 (overedging)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing operations requirements - Continued.

No.	Requirements (Including stitch and seam type)	Thread	
		Needle	Bobbin or Looper
		50 (517,518) (lock stitch) 70 (overedging)	70
11.	Hem bottom of coat.		
	a. Turn the bottom of coat with the raw edge turned in and stitch 1/16 to 1/8 inch from edge. Hem shall enclose the bias binding tape ends and shall finish 1 plus or minus 1/8 inch wide. (Stitch 301 seam EFb-1).	50	50
12.	Hem sleeves.		
	a. Upon completion of operation numbers 10a and b, joining of side and underarm seams, turn the bottom of the sleeve with the raw edges turned in and stitch 1/16 to 1/8 inch from edge. Hem shall finish 1 plus or minus 1/8 inch wide. (Stitch 301, seam EFb-1).	50	50
13.	Attach snap fasteners.		
	a. Attach socket part of snaps to the left front through three pieces of basic material as indicated by marks on pattern.		
	b. Attach stud part of snaps to the right front through three plies of basic material as indicated by marks on pattern.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing operations requirements - Continued.

No.	Requirements (Including stitch and seam type)	Thread	
		Needle	Bobbin or Looper
14.	Clean coat. a. Trim all thread ends and remove all loose threads from coat. b. Remove all spots, stains, and shade tickets.		
	Trousers		
15.	Join seat and outseams. a. Join the seams with double-lapped, double-stitched seams. (Stitch 301 or 401, Seam LSc-2)	50 (301) 50 (401)	50 70
	or		
	b. Join seat seams and outseams by using Safety-Stitch. (Stitch 512, 515, 516, 517, 518, or 519, seam SSa-2)	50 (515,516,519,512) (chain stitch) and 70 (overedging) 50 (517,518) (lock stitch) 70 (overedging)	70 70 70
16.	Attach elastic webbing. Finished appearance. The elastic webbing shall be centered on the outseams and positioned so to finish inside and centered on the finished hem. a. With the elastic webbing centered on the outseams, stretch the webbing to nine inches and	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing operations requirements - Continued.

No.	Requirements (Including stitch and seam type)	Thread	
		Needle	Bobbin or Looper
	center on outseams (3/8 inch off center tolerance allowed). Place a vertical bartack 1-1/8 to 1-3/8 inches long at each end of the stretched elastic webbing. (Bartack)		
17.	Hem top of trousers. a. Turn top of trousers to inside with the raw edges turned in, and with the waistband reinforcement pieces positioned so to provide reinforcement for snap fasteners (see marks on pattern for position of snap fasteners). Stitch through trousers the top and bottom of waistband hem. The finished hem shall measure 1-1/2 inches plus or minus 1/4 inch wide. (Stretch 301, seam T-2, inverted)	50	50
18.	Make front openings. a. Turn cut-on facing for right front fly opening to the inside as indicated by marks on pattern, and enclosing the snap fastener reinforcement piece. Turn in raw edge and stitch through trousers 1/16 to 1/8 inch from edge. The finished fly shall measure 1-1/2 inches plus or minus 1/4 inch wide. (Stitch 301, seam T-2 inverted)	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing operations requirements - Continued.

No.	Requirements (Including stitch and seam type)	Thread	
		Needle	Bobbin or Looper
	b. Turn cut-on facing for left front fly opening to the inside as indicated by marks on pattern, and stitch through trousers 1/16 to 1/8 inch from edge. The left fly shall finish 3 plies and shall measure 1-3/4 inches plus or minus 1/8 inch wide. (Stitch 301, seam T-2, inverted)	50	50
19.	Join crotch seam.	50 (301)	50
	a. Join crotch seam with a double-lapped, double-stitched seam. (Stitch 301 or 401, seam LSc-2)	50 (401)	70
	or		
	b. Turn crotch seam of right front to the outside and stitch 1/16 to 1/8 inch from edge. (Stitch 301 or 401, EFa-1 seam)	50 (301) 50 (401)	50 70
	and		
	c. Turn crotch seam of left front crotch to inside and double stitch to the right front catching the right front crotch in both rows of stitching. Continue one row of stitching to 1-1/2 inches plus or minus 1/4 inch above crotch, across width of fly and back down to crotch, forming a triangle of stitching. (Stitch 301 or 401, seam LSd-2)	50 (301) 50 (401)	50 50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing operations requirements - Continued.

No.	Requirements (Including stitch and seam type)	Thread	
		Needle	Bobbin or Looper
	or		
	d. Join crotch seams by using safety-stitch. (Stitch 512, 515, 516, 517, 518, 519, seam SSa-2)	50 (515,516,519,512,518) (chain stitch)	70
		70 (overedging)	70
		50 (lockstitch) (overedging)	70
		70	70
20.	Attach crotch reinforcement piece.		
	a. Superimpose the reinforcement tape over crotch seam even with the raw edge of inseam and extending 1/4 to 3/8 inch above the cross stitch at bottom of fly opening. Double stitch the tape to trousers up to the cross stitch. (Stitch 301)	50	50
	b. Place a horizontal bartack 1/2 to 5/8 inch at top of cross stitch. (Bartack)	50	50
21.	Join inseams.		
	a. Join the inseams with double-lapped, double-stitched seams. (Stitch 301 or 401, seam LSc-2)	50 (301) 50 (401)	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing operations requirements - Continued.

No.	Requirements (Including stitch and seam type)	Thread	
		Needle	Bobbin or Looper
	or		
	b. Join inseams by using safety-stitch. (Stitch 512, 515, 516, 517, 518, or 519, Seam SSa-2)	50 (515,516,519) 70 (chain stitch) 70 | 70 (overedging) 50 (517,518,512) 70 (lock stitch) 70 | 70 (overedging)	
22.	Hem bottom of trousers.		
	a. Turn up bottom of trousers with raw edges turned in and stitch through trousers 1/16 to 1/8 inch from edge. Finished hem shall measure 1 plus or minus 1/8 inch wide. (Stitch 301, seam EFb-1)	50	50
23.	Attach labels.		
	a. Position the combination label 1/2 to 3/4 inch to the left side (right side as worn) of the seat seam not more than 1/4 inch below the waistband hem, and stitch on all four sides. (Stitch 301, seam LSbj-1)	50	50
24.	Attach snap fasteners.		
	a. Attach socket part of snap fastener at left front opening as indicated by marks on pattern. Snap shall be through a minimum of three thicknesses of material.		

Source: https://assist.dla.mil -- Downloaded: 202640-21T09:33Z
Check the source to verify that this is the currentversion before use.

TABLE III. Manufacturing operations requirements - Continued.

No.	Requirements (Including stitch and seam type)	Thread	
		Needle	Bobbin or Looper
	b. Attach stud part of snap fastener at right front opening as indicated by marks on pattern to effect a smooth closure. Snap shall be through a minimum of three thicknesses of material.		
25.	Clean trousers.		
	a. Trim all thread ends and remove all loose threads.		
	b. Remove all spots, stains and shade tickets.		

3.7 Sizes and measurements. The finished pajama coat and trousers shall conform to the measurements and tolerances as shown in tables IV and V. Measurements and tolerances are expressed in inches.

TABLE IV. Pajama, coat.

Measurement	Extra Small	Small	Medium	Large	Extra Large	Tolerance
1/2 Chest 1/	21	23	25	27	29	±3/4
Back length 2/	27-1/2	28	28-1/2	29	29-1/2	±1/2
Sleeve length 3/	31	32	33	34	35	±1/2

1/ 1/2 Chest measurement taken from folded edge to folded edge at base of armhole (when snaps are closed).

2/ Back length measurement taken from top edge of neck at center back to bottom of coat.

3/ Sleeve length measurement taken from center of back at neck, diagonally across back and down along sleeve to bottom edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

TABLE V. Pajama, trousers.

Measurement	Extra Small	Small	Medium	Large	Extra Large	Tolerance
1/2 Waist (relaxed) 1/	13	15	17	19	21	±1/2
1/2 Waist (stretched) 2/	15	17	19	21	23	Minimum
1/2 Seat 3/	18	20	22	25	26	±3/4
Inseam 4/	27-1/2	28	28-1/2	29	29-1/2	±1/2
1/2 Bottom of leg 5/	8-3/4	9-1/4	9-1/2	10	10-1/2	±1/4

1/ 1/2 Waist (relaxed). Measure from side to side along top edge of waist.

2/ 1/2 Waist (stretched). Measure from side to side along top edge of waist with the waistband stretched taut in straight line using manual tension.

3/ 1/2 Seat measurement taken from folded edge to folded edge at point in line with tacking of lower end of fly opening.

4/ Inseam measurement taken along inseam from crotch seam to bottom edge.

5/ 1/2 Bottom of leg measurement taken from folded edge to folded edge at bottom of trouser leg.

6/ The dimensions of the waist relaxed and stretched shall be determined at the widest point with the proper snap fasteners mated.

3.8 Workmanship. The finished pajama coats and trousers shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable or the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2. Inspection for acceptance. Inspection shall be conducted in accordance with MIL-STD-105, unless otherwise indicated.

4.2.1 Component and material testing. In accordance with 4.1 above, components shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this purchase description or applicable purchase document. In addition, testing shall be performed on components listed in Table VI for characteristics noted. Whenever applicable, tests shall be conducted in accordance with methods prescribed in FED-STD-191 and as listed in table VI. All requirements are applicable to the sample unit. All test reports shall contain the individual values used in expressing the final results.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

4.2.2 Sampling for testing. Unless otherwise specified in a subsidiary specification, the sampling for testing shall be as specified below:

Lot size (lot unit)	Sample size (sample unit)
800 or less	2
801 or 22,000 inclusive	3
22,001 and over	5

The lot shall be unacceptable if one or more units fail to meet any test requirement specified. The sample unit shall be 3 continuous yards full width of the finished cloth.

TABLE VI. Test methods.

Characteristic	Requirement Paragraph	Test Method
Base cloth:		
Polyester identification	3.1.1.1	1/
Cotton identification	3.1.1.2	1/
Cotton - combed or well carded	3.1.1.2	1/
Fiber content:		
Polyester-percent	3.1.2	4.4
Weave	3.1.3.1	Visual 1/
Nonfibrous materials	3.1.3.9	2611
Yarns per inch:		
Warp	3.1.3.2	5050
Filling	3.1.3.2	5050
Breaking strength:		
Warp	3.1.3.2	5100
Filling	3.1.3.2	5100
Shrinkage	3.1.3.10	5550
Weight	3.1.3.2	5041
pH	3.1.3.8	2811
Sulfur content	3.1.3.4	2020
Mercerized and singed	3.1.3.7	Microscopic 1/
Colorfastness:		
Laundering (3 cycles)	3.1.3.6	5610 3/
Crocking	3.1.3.6	5651
Perspiration	3.1.3.6	5680
Light	3.1.3.6	5660

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

Table VI. Test methods - Continued.

Characteristic	Requirement Paragraph	Test Method
Label combination:		
Material identification	3.1.8	1200
Weight 1 lb. (45 inch)	3.1.8	5041 1/
Adhesion	3.1.8	5605 2/
Color	3.1.8	Visual
Snap fastener:		
Material identification	3.1.7	1/

1/ Unless otherwise specified a certificate of compliance shall be submitted and will be acceptable for the stated requirement.
2/ One determination shall be made after 8 successive launderings. The test shall be performed with the specified label material (see 3.1.8) and the specified, base material (see 3.1.3).
3/ For method 5610 - 3 laundering cycles shall be performed with the test specimens dried after each of the 3 laundering cycles. Only the stain on the cotton fiber of the color transfer cloth shall be evaluated.

4.3 Polyester fiber content.

4.3.1 Test specimen. The specimen shall be approximately 2 grams made up of yarns ravelled from the cloth sample and cut into approximately 1/4 inch lengths.

4.3.2 Apparatus, reagents, method cited.

Apparatus as described in Method 2611 of Fed. Std. 191
Sintered glass filter of crucible coarse porosity.
Hydrometer.
Sulfuric acid, 74 percent (density 1.67) prepared by pouring 350 cubic centimeters (cc.) of water in a round-bottom flask, then adding 680 cc. of concentrated sulfuric acid slowly, with cooling under the tap. The density of the solution is adjusted to 1.67 using a hydrometer.
Sulfuric acid, dilute (100 cc. of concentrated sulfuric acid added to 1900 cc. of water).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

4.3.3 Procedure. The nonfibrous material shall be removed as specified in Method 2611. The desized specimen shall be dried to a constant weight, cooled in a desiccator and weighed. The specimen shall then be immersed in 200 cc. of 75 percent solution of sulfuric acid for 1 hour with intermittent stirring. The residual fibers shall be transferred to the glass crucible and the excess acid solution removed by suction. The residual fibers shall be washed on the fiber filter successively with dilute sulfuric acid, water, dilute ammonia solution (soak for ten minutes) and again with water (soak for ten minutes). After each separate washing, the crucible is drained by suction. The residue shall be dried to a constant weight in the air oven at 105° to 110° C. This is the "weight of the dry polyester fiber" in the specimen.

4.3.4 Result. The percentage of polyester fiber shall be based on the following equation:

$$\text{Polyester fiber, percent} = \frac{\text{Weight of dry polyester fiber}}{\text{Weight of dry desized specimen}} \times 100$$

4.3.5 Polyester fiber content. Two specimens shall be tested from each sample unit and the polyester fiber content shall be the average of the results obtained from the specimen tested, and shall be reported to the nearest 1.0 percent.

4.4 Examination of the end item. The end item shall be examined for defects listed in table VII. The applicable inspection level and acceptable quality levels (AQL's) shall be as specified in 4.5. The sample unit shall be one pajama coat or trousers.

4.4.1 Classification of defects. All defects shall be classified in accordance with list shown in table VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

TABLE VII. Classification of defects.

General defects	Classification	
	Major	Minor
Material defects and damages.		
a. Any hole, smash, multiple float, loose slub or burn.	X	
b. Needle chew, cut or tear.	X	
c. Mend clearly visible.		X
Component and assembly.		
Any component part or required operation omitted.	X	
Cutting.		
Any component part not cut in conformance with specification requirements.	X	
Shaded parts.		
Any outside part shaded.		X
Cleanness		
a. Any spot or stain on outside.		X
b. Thread ends not trimmed, shade tickets or loose threads not removed throughout garment, or shade marks visible on outside.		X
c. Any visible basting stitch.		X
Seams and stitching.		
a. Accuracy of seaming		
1. Seams twisted, puckered, or pleated.		X
2. Part of material caught in unrelated operation.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

TABLE VII. Classification of defects - Continued.

General defects	Classification	
	Major	Minor
3. End(s) of stitching, when not caught in other seams or stitching, backtacked less than 1/4 inch.		X
4. Thread breaks stitched less than 1/2 inch beyond each end of break.		X
5. Ends of a continuous line of stitching overlapped less than 1/2 inch.		X
6. Wrong shade of thread.		X
b. Gage of stitching - (edge or raised stitching).		
1. Irregular, unevenly gaged or not uniform.		X
2. Beyond range of width specified, or varies more than 1/16 inch when no range is specified.		X
c. Open seams		
1. All seams except bottom and leg hems:		
- up to 1 inch		X
- over 1 inch.	X	
2. On bottom and leg hems, more than 1 inch.		X
NOTE: Broken or continuous skipped or run-off stitches constitute an open seam. A double-stitched seam is considered open when either side of the seam is open.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

TABLE VII. Classification of defects - Continued.

General defects	Classification	
	Major	Minor
d. Raw edges (on outside)		
- 1/2 inch to 1 inch, inclusive		X
- over 1 inch.	X	
e. Run-offs		
1. On joining seams, when resulting in an open seam, score as an open seam.		
2. On outside raised or top stitching, when not resulting in an open seam:		
- over 1 inch		X
f. Seam and stitch type		
1. Wrong seam or stitch type.		X
2. Looper thread exposed on outside of garments when stitch type 401 is used.	X	
g. Stitch tension		
1. Loose tension, resulting in a loose seam.		X
2. Loose tension, on edge or raise stitching resulting in loosely exposed bobbin or top thread.		X
3. Tight tension (stitches break when normal strain is applied to seam or stitching).	X	
h. Stitches per inch		
Stitches less than minimum specified.		
- 1 or 2 stitches.		X
- more than 2 stitches.	X	
Any number of stitches in excess of maximum specified.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

TABLE VII. Classification of defects - Continued.

General defects	Classification Major	Minor
i. Stitches skipped or broken on edge or raise stitching (when seam is seamed, turned and stitched) and top stitching.		
- over 3/4 inch.		X
Snap fasteners (all)		
Missing, loose, mismated, bent, broken, or otherwise defective, affecting function:		
- 1 snap fastener.		X
- 2 or more snap fasteners.	X	
Labels - combination		
a. Missing, incorrect or illegible.	X	
b. Not in proper location on coat or trousers.		X
c. Not stitched on all four sides, when applicable.		X
d. Stitches showing through back of coat, when applicable.		X
e. Not specified color.		X
Detailed defects applicable to specific parts.	**Classification Major**	**Minor**
Coat		
Fronts		
a. Uneven at bottom when fastened, by over 1/2 inch.	X	
Pocket		
a. Corners not securely tacked.		X
b. Hem less than 7/8 inch or more than 1-1/8 inches wide.		X
c. Less than 5-3/8 inches or more than 5-5/8 inches wide.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

TABLE VII. Classification of defects - Continued.

Detailed defects applicable to specific parts.	Classification	
	Major	Minor
d. Less than 5-3/4 inches or more than 6-1/4 inches deep at center.		X
Shoulder joining		
a. Front on top of backs.		X
Neck and front binding		
a. Omitted, twisted, pleated, puckered or causing distortion to any front or neck area.	X	
b. Any front not inserted sufficiently in the bias binding tape to form the third ply reinforcement for the snap fasteners.	X	
Side seams and underarm seams		
a. Backs on top of fronts.		X
Sleeves and armholes		
a. Sleeves overlapping fronts and back at armhole seam.	X	
b. Sleeve hem less than 7/8 inch or more than 1-1/8 inches wide.		X
Bottom hem		
a. Less than 7/8 inch or more than 1-1/8 inches wide		X
b. Hem not over facing.		X
Snap fasteners		
a. Out of vertical alignment by 1/4 inch or more.	X	
b. Not properly positioned.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

TABLE VII. Classification of defects - Continued.

Detailed defects applicable to specific parts.	Classification	
	Major	Minor
Snap fastener reinforcement piece (for trousers)		
a. One or more snap fasteners not caught through a minimum of three thicknesses of material.		X
TROUSERS		
Front opening		
a. Flies uneven in length by over 1/2 inch.		X
b. The right finished fly facing less than 1-1/4 inches or more than 1-3/4 inches wide.		X
c. The left finished fly facing less than 1-5/8 inches or more than 1-7/8 inches wide.		X
d. Fly facings finishing less than three plies.		X
e. Cross stitching at base of fly less than 1-1/4 inches or more than 1-3/4 inches above top of crotch seam.		X
Snap fastener		
a. Snap fastener not caught through at least three plies of fabric.		X
b. Not positioned properly.		X
Crotch reinforcement piece		
a. Omitted.	X	
b. Tape not extending to cross stitch of fly.		X
c. Tape not caught completely in bartack (width).		X

Source: https://assist.dla.mil -- Downloaded: 2026-0-21T09:33Z
Check the source to verify that this is the current version before use.

TABLE VII. Classification of defects - Continued.

Detailed defects applicable to specific parts.	Classification	
	Major	Minor
Waistband hem		
a. Waistband reinforcement piece omitted.		X
b. Less than 1-1/4 inches or more than 1-3/4 inches wide.		X
c. Elastic webbing omitted.	X	
Leg hems		
a. Less than 7/8 inch or more than 1-1/8 inches wide.		X
Size measurement defects - (coat)		
1/2 chest back length		
a. Any measurement deviating from nominal dimensions and tolerance specified in table III.	X	
Sleeve length		
a. Sleeve lengths uneven by 3/4 inch or more.	X	
Size measurement defects - (trousers)		
1/2 waist 1/2 seat Inseam — Any measurement deviating from nominal dimension and tolerance specified in table IV shall be classified as a defect.		

4.5 Acceptable quality levels and inspection levels. The inspection levels and acceptable quality levels, expressed in defects per hundred units (DHU) shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

	AQL's	Inspection levels
For defects listed in table VII, General defects and Detailed defects applicable to specific parts.		II
Major	2.5	
Total	10.0	
For defects listed in table VII, Size measurement defects, coat.		S-3
One class	4.0	

4.6 Packaging inspection. An examination shall be made to determine that preservation, packaging, packing and marking comply with section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. Examination for closure defects listed below shall be made on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

TABLE VIII. Examination for defects.

Examination	Defects
Marking (interior and exterior)	Omitted, incorrect, illegible, improper size, location sequence, application.
Materials	Any component missing, damaged or not as specified.
Content	Number of end items in container more or less than required.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or C, as specified (see 6.2).

5.1.1 Level A.

Source: https://assist.dla.mil -- Downloaded: 202640-21T09:33Z
Check the source to verify that this is the currentversion before use.

5.1.1.1 Unit package. One coat or one pair of trousers, as specified, constitutes one unit.

5.1.1.2 Folding.

5.1.1.3 Coat. Each coat, with only the top snap fastener mated, shall be laid front down, the sides and sleeves folded in over the back and the bottom brought up to the shoulders to approximate dimensions of 12 by 12 inches. Each folded coat shall be individually inserted in a snug-fitting polyethylene bag as specified herein.

5.1.1.4 Trousers. Each pair of trousers shall be neatly folded to approximate dimensions of 12 by 12 inches and inserted in a snug fitting polyethylene bag as specified herein.

5.1.1.5 Polyethylene bag. The bag shall be flat style, made of clear polyethylene film of 0.00125 inch thickness (plus or minus 20 percent tolerance). The bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. Alternatively, the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap.

5.1.2 Level C.

5.1.2.1 Unit package. Preservation for coat or one pair of trousers shall conform to the requirements of MIL-STD-794 for level C.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Coat. Forty coats of one type and size only, packaged as specified in 5.1, shall be packed in an exterior container designed for a type 2 load and conforming to PPP-B-601, overseas type, PPP-B-621, class 2, or PPP-B-636. Closure and strapping shall be as specified in the applicable box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

5.2.1.2 Trousers. Forty pairs of trousers of one type and size only, packaged as specified in 5.1, shall be packed in an exterior container designed for a type 2 load and conforming to PPP-B-601 overseas type, PPP-B-621, class 2, or PPP-B-636, class weather-resistant. Closure and strapping shall be as specified in the applicable box specification.

5.2.1.3 Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall be as specified in the liner specification. Case liner shall not be required for fiberboard boxes. Each fiberboard box shall be waterproofed as specified in PPP-B-636.

5.2.2 Level B.

5.2.2.1 Coat. Forty coats of one type and size only, packed as specified in 5.1 shall be packed in an exterior container designed for a type 2 load and conforming to PPP-B-601, domestic type, PPP-B-621, class 1, or PPP-B-636, class domestic. Closure shall be as specified in the applicable box specification.

5.2.2.2 Trousers. Forty pairs of trousers of one type and size only, packaged as specified in 5.1 shall be packed in an exterior container designed for a type 2 load conforming to PPP-B-601, domestic type, PPP-B-621, class 1, or PPP-B-636, class domestic. Closure shall be as specified in the applicable box specification.

5.2.3 Level C. Forty unit packages containing one coat or one pair of trousers shall be packed in accordance with the requirements of MIL-STD-794 for level C.

5.2.4 Packing variation permitted. If the required number of units to be shipped is less than the number of units specified to be overpacked in an exterior container, such units shall be packed in an exterior container of suitable size and design, acceptable to a common carrier, which will insure safe delivery to destination.

5.2.5 Unitized loads. Unitized loads, commensurate with the level of packing specified in the contract or order, shall be used whenever total quantities for shipment to one destination exceed 250 pounds or 20 cubic feet. Loads shall be unitized on pallets conforming to MIL-STD-147. Quantities less than 20 cubic feet need not be unitized. Pallet loads including the pallet shall not exceed 43 inches in length, 52 inches in width, and 54 inches in height. Pallet shall conform to Type IV or Type V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

5.2.5.1 Levels A and B. One coat or one pair of trousers shall be packed as specified in 5.2.1 and 5.2.2 and shall be unitized on pallets as specified in 5.2.5.

5.2.5.2 Level C. One coat or one pair of trousers shall be packed as specified in 5.2.3 and shall be unitized as specified in MIL-STD-794.

5.3 Marking.

5.3.1 Levels A, B and C. Each unit pack, intermediate package, exterior container and unitized load shall be marked as specified in MIL-STD-129.

5.4 General.

5.4.1 Exterior container. Exterior container (see 5.2.1, 5.2.2, and 5.2.3) shall be of minimum tare and cube consistent with the protection required and shall contain equal quantities of identical stock numbered items to the greatest extent practicable.

5.4.2 Packaging inspection. The inspection of these packaging requirements shall be in accordance with 4.6.

5.5 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag information shall indicate the following information:

Stock Number
Nomenclature
Quantity
Size
Name and address of manufacturer
Contract or purchase order number
Date of manufacture

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The pajama coats and trousers are intended to be worn by the bed patients in service hospitals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

6.2 Acquisition requirements.

a. Title, number, and date of the specification.

b. Issue of DODISS to be cited in the solicitation and if required, the specific issue of individual documents referenced (see 2.1).

c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

d. National Stock Number

6.3 Guide samples. For access to sample, address the procuring office issuing the invitation for bids.

6.4 Dyestuff formulation.

6.4.1 Blue 201. A suggested but not mandatory dyestuff formulation for Blue 201 is as follows:

Vat Blue 67
Vat Red 10 - C.I. 67000

6.5 Subject term (key word) listing

Clinic
Cotton-Polyester
Hospital
Pajama
Trousers

6.6 National Stock Number (NSN) coverage. This specification covers the following items shown in the Federal Supply Catalog.

National Stock Number	Item Identification
6532-00-081-1466	Trousers, Pajama, Size 1
6532-00-081-1470	Trousers, Pajama, Size 2
6532-00-081-1666	Trousers, Pajama, Size 3
6532-00-081-1680	Trousers, Pajama, Size 4
6532-00-081-1682	Trousers, Pajama, Size 5
6532-00-081-1683	Coat, Pajama, Size 1
6532-00-081-1801	Coat, Pajama, Size 2
6532-00-081-1802	Coat, Pajama, Size 3
6532-00-081-1804	Coat, Pajama, Size 4
6532-00-081-1807	Coat, Pajama, Size 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

6.7 Commodity coverage. This specification does not cover all types, classes, grades, or sizes of the commodity indicated by the title of this specification, or those which are commercially available, but is intended to cover the type which is normally procured to meet requirements.

6.8 Changes from previous issue. Marginal notations are not used in this revision to identify modifications, additions, corrections, and deletions from the previous issue due to the extensiveness of the changes.

Custodians:

Air Force - 03
Army - MD
Navy - MS

Preparing activity:

DoD - MB

Review activities:

Air Force - 50
Army - TM
Navy - YD

Agent:


DLA - DM

Civil Agency Coordinating Activities:


FDA - MPQAS
USPHS
VA

Project No. 6532-1208
Location: COATSM13.DOC

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

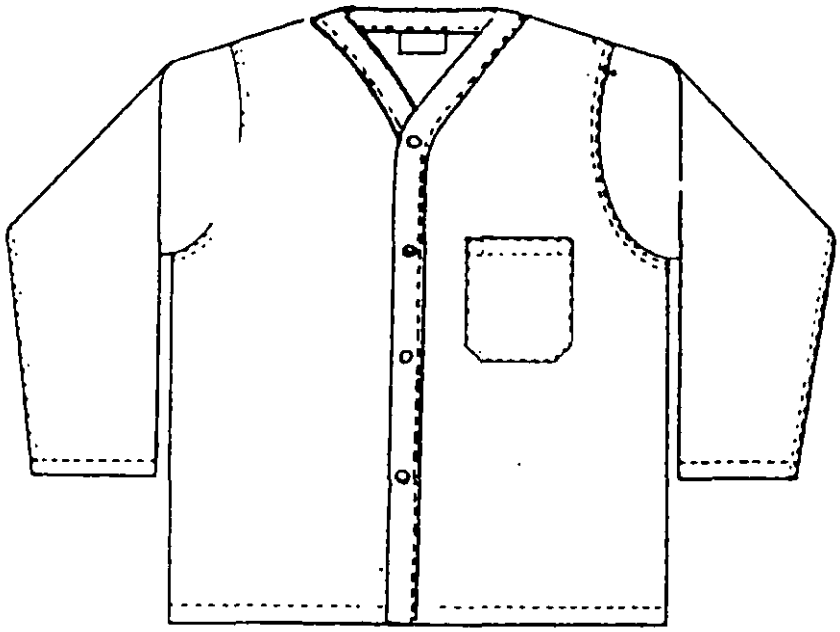

FRONT

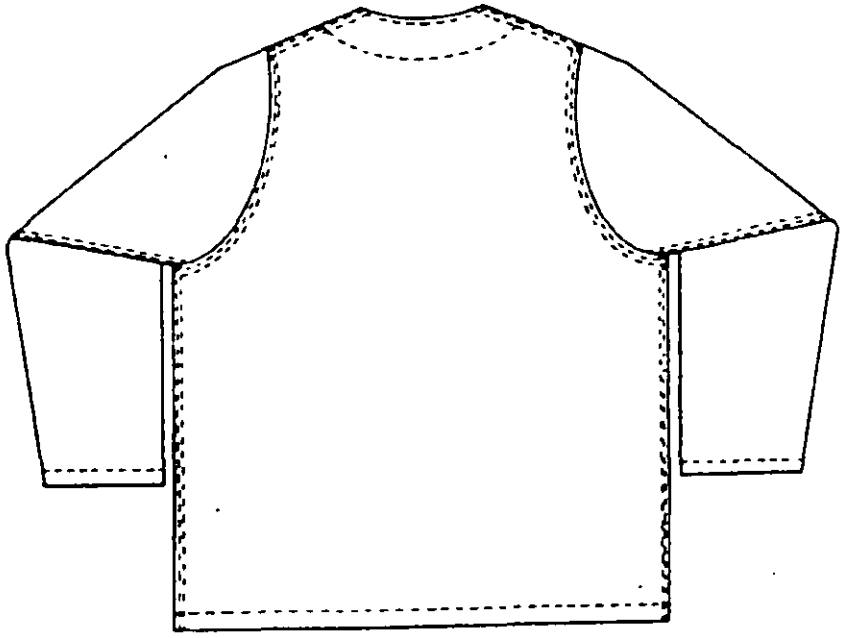

BACK

FIGURE 1. Coat, man's pajama.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

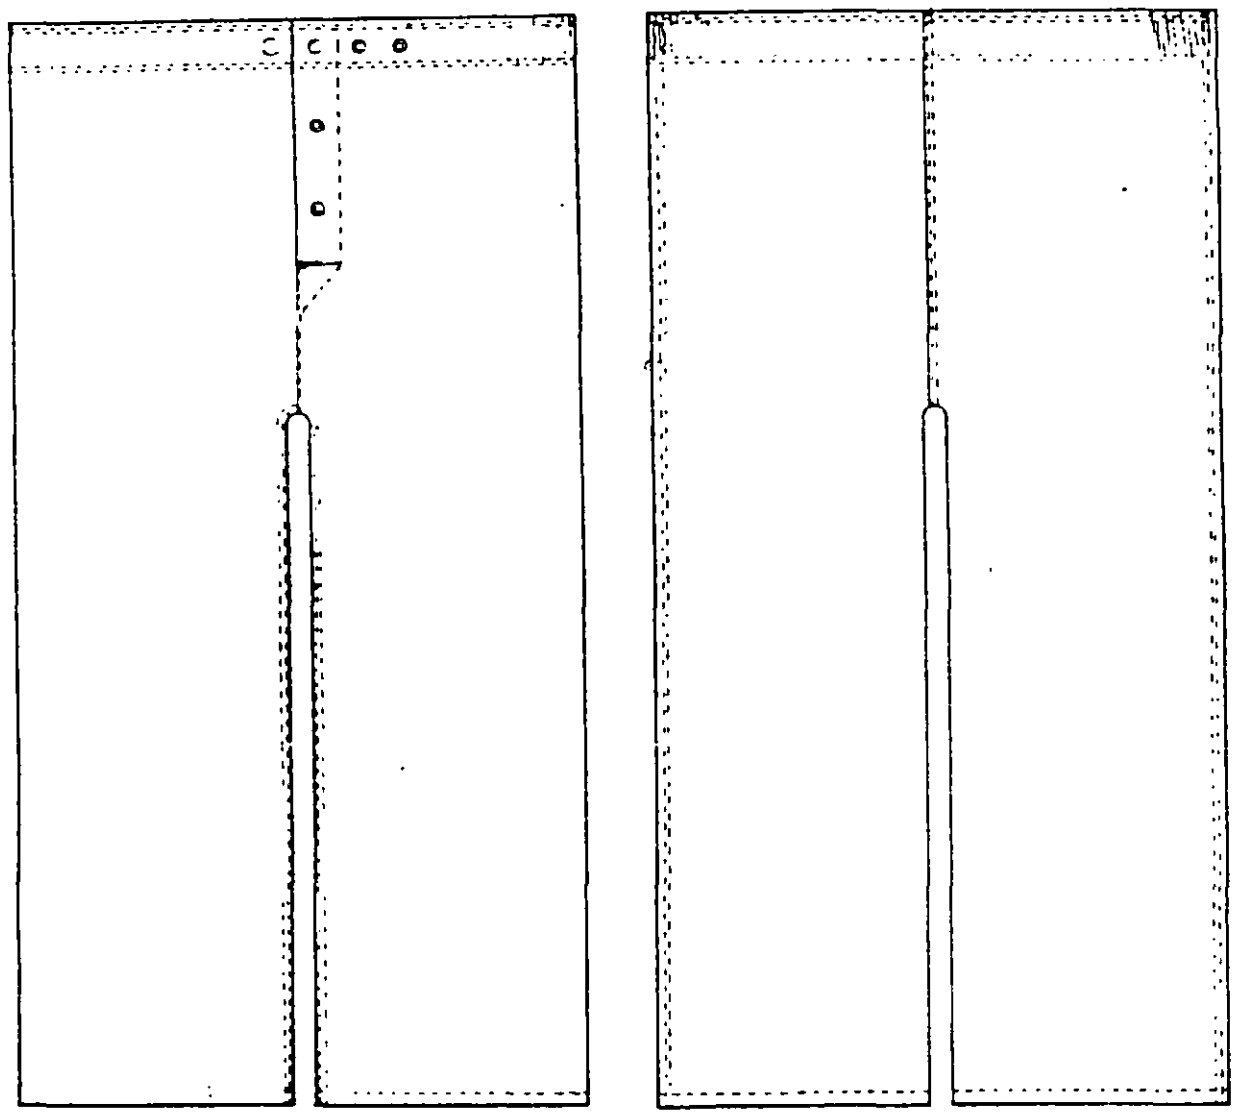


FIGURE 2. Trousers, man's pajama.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-C-36904C	2. DOCUMENT DATE (YYMMDD) 15 January 1993

3. DOCUMENT TITLE
COATS AND TROUSERS, PAJAMA, COTTON-POLYESTER

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME DEFENSE PERSONNEL SUPPORT CENTER ATTN: DPSC-MSE	b. TELEPHONE (Include Area Code) (1) Commercial: AC 215-737-2870 (2) AUTOVON: AV 444-2870
c. ADDRESS (Include Zip Code) 2800 SO. 20TH STREET PHILADELPHIA, PA 19145	d. IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 — Previous editions are obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:33Z
Check the source to verify that this is the current version before use.