INCH-POUND

A-A-55112
23 December 1992

COMMERCIAL ITEM DESCRIPTION

BAG, FLYER'S HELMET

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-B-43290.

Abstract. This Commercial Item Description covers one type of flyer's helmet carrying bag. The bag is intended for use by aviation personnel of the Department of Defense and is designed to hold the flyer's helmet and auxiliary equipment.

Salient Characteristics. The bag shall consist of an outer panel with a liner. The bag shall have two inner pockets, one at each end of the liner, and two outer pockets on the front of the bag. The bag shall have matching grip handles on the front and back, with a slide fastener for closing the bag, and nylon tape fastener and snap fasteners for closing the outer pockets (see figure 1).

Figure. Figure 1 is furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Material.

Cloth, nylon. The nylon cloth for the outer and inner panel, outer pockets, protector flap, grip handle reinforcements, and grip handle panels shall be a durable water repellent treated, shade Camouflage Green CG-483, except that the seam efficiency shall be no lower than 50 percent. The finished cloth shall conform to the requirements specified in table I.

Table I. Test method

Characteristic	Requirement	Test method
Fiber identification	Bright filament nylon	1/
Multifilament yarn	None	1/
Colorfastness to:		
Weathering	#4	5671 2/
Laundering	#4	AATCC 61,
Crocking	#4	AATCC TM 8-
Weight per sq yd, ounces	3.8 (minimum)	ASTM-D 3776
	4.8 (maximum)	ASTM-D 3776
Yarns per inch minimum	80 (warp)	ASTM-D 3776
	56 (filling)	ASTM-D 3775
Breaking strength pounds, minimum	275 (warp)	ASTM-D 5034
	225 (filling)	ASTM-D 5034
Stiffness load, lb, maximum	0.005 (warp)	5202
	0.004 (filling)	5202
Weave	Plain weave	Visual 3/
Nonfibrous materials	No more than a total of 2.0% chloroform-soluble and water-soluble	ASTM-D 629 SEC 9
Spray rating:		
Initial	Equal to or better than 100, 100, 90	5526
After 3 launderings	Equal to or better than 80, 80, 70	5556 5/, 5526

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Table I. Test method - Continue

Characteristic	Requirement	Test method
Hydrostatic height:		
Initial	Not lower than 40 cm	5514
After 3 laundering	Not lower than 45 cm	5556, 5514
Resistance to organic liquids:		
Initial	No wetting by n-tetradecane after 30 seconds	None
After 3 launderings	Same as above	None
Air permeability	Maximum air permeability of 2.0 cubic feet per minute per sq ft	ASTM-D 737
pH	No less than 5.0 nor more than 8.5	ASTM-D 2165
Dimensional stability		
minimum	3.0 (warp)	None
minimum	2.0 (filling)	None
Seam efficiency	No lower than 50%	5110 4/

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirements.

2/ The time of exposure shall be 80 hours.

3/ One determination per sample unit and the results reported as "pass" or "fail".

4/ The needle shall measure 0.049 ± 0.001 inch across the blade at the eye. The thread shall be a polyester twisted soft multiple cord, normal elongation with a general purpose or nonwicking finish.

Batting, polyester. The material for the bag liner and grip handle pads shall be quilted polyester batting, ripstop nylon cloth, Olive Green 106 straight pattern. The cloth outer covering is required on one side of the batting only, and the straight line quilting stitching shall be 6 inches apart. The requirements for colorfastness shall not apply to nylon outer gloss.

Fastener, nylon tape. The nylon tape fastener for closure of pockets shall be 5/8-inch in width, shade Camouflage Green CG-483, nylon 8.0 mil hook (330 denier).

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:42Z
Check the source to verify that this is the current version before use.

Fastener, slide, interlocking. The slide fastener shall be type I, style 2, size MHS, individual element brass or continuous element monofilament coil or ladder configuration chain conforming to V-F-106. The length of the chain shall be as required for the bag opening. The color of the tape shall be Camouflage Green 483, and shall be water repellent treated and mildew resistant treated. The closed bottom stop shall be a staple type, slider identification marked. The pull shall have an opening large enough to accommodate a dyed Camouflage Green 483 thong and the finished length shall be 2-1/2 to 3-1/2 inches long. For continuous element monofilament chain application, the color of the chain, slider, pull, and stop shall approximately match the dyed tape shade.

Fastener snap. The snap fasteners for closing the outer pockets shall be a black, small wire spring clamp type. The eyelet shall be size 2 and the button shall be size 1.

Thread, polyester. The thread for all stitching shall be polyester twisted soft multiple cord, normal elongation with a nonwicking finish. The thread shall be dyed Camouflage Green CG-483 and shall show fastness to weathering and laundering.

Webbing, nylon, 1-inch. The nylon webbing for attaching the snap hook shall be 1-inch wide, color Camouflage Green CG-483, double fabric consisting of two warps bound together by a single filling and a binder-warp.

Snap hook, 1-inch. The snap hook shall be a 1-inch, wire body, fixed loop eye, flat spring closure with retainer hook.

Label/marking. The identification label shall be a nonwoven, spunbonded polyester cloth or nonwoven, 80/20 polyester/cellulose cloth, impregnated, acrylic coated, mildew-resistant. Position top edge of identification label 2-1/2 to 3-1/2 inches from top edge (straight edge) of liner panel on same side as panel pockets are attached and with the label centered, ± 3/4 inch between pockets. Stitch (type 301) to liner panel around all four sides of the label. Contents of inscription shall be as follows:

Item description
Contract number
Stock number
Size
Contractor's name

Patterns. The government shall furnish a single size pattern. Commercial patterns may be used in lieu of the government furnished pattern provided they conform to the cited design and finished measurements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Finished measurements. The finished bag shall conform to the measurements below.

Table II. Finished measurements

Location	Inches	Tolerances (inches)
Width 1/	19-1/4	± 1/2
Length 2/	20	± 1/2
Outer pockets (width at center of pocket)	9-1/2	± 1/4
Outer pockets (length at center of pocket)	14	± 1/4
Inner pockets (width at center of pocket)	6-3/4	± 1/4
Inner pockets (length at center of pocket)	10-1/4	± 1/4

1/ Measure across center of bag on back panel.
2/ Measure from center lower edge of bag to top edge of bag. (Do not include slide fastener.)

Workmanship. After completion, the finished bag shall be thoroughly cleaned, and all loose thread, lint, and foreign matter removed.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor QA systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

Examination. Bag lots shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Visual Examination. The bags shall be examined for the defects listed below. The lot size shall be expressed in units of bags. the sample unit shall be one bag. The inspection level shall be II.

Defects. The bag shall be examined for the following defects: any hole, cut, tear, color not as specified; any spot or stain (outside); thread ends not removed; label missing, incorrect, or illegible; measurement of item not as specified; exposed drill holes on nylon cloth; nylon webbing not firmly and tightly woven, or edges frayed or scalloped; snap fastener not functioning properly (i.e., fails to snap closed, to provide a secure closure, or to open freely); webbing ends not fused; .

Dimensional Examination. The finished bag shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one bag; the inspection level shall be S-3.

Examine	Defect
Overall finished dimensions of bag, outer pockets, and inner pockets	Any dimension exceeding tolerance
Components	Size not within specified tolerance Location not within specified tolerance

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Packaging Examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5.

Examination	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method application
Material	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of flap, improper taping, loose strapping or inadequate stapling
Content	Number of items per container is more or less than required
	NSN shown on one or more items not as specified on shipping container
Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

Packaging, Packing, Marking, and Palletization

Packaging, packing, marking and palletization shall be in accordance with ASTM-D 3951, Standard Practice for Commercial Packaging, as specified for shipments to the Department of Defense, including Section 7. Shipping cartons shall be style RSC-L, variety SW, with DW liners, class Domestic, grade 275.

Note: Each shipping container shall contain only one National Stock Number (NSN) and a total quantity of forty bags packaged as specified above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Unitized loads, placing boxes on pallets, shall be used whenever total quantity for shipment to one destination exceeds 250 pounds (excluding the pallet) or 20 cubic feet. Pallets shall have a length of 40 inches and a width of 48 inches. Pallet loads, including the pallet, shall not exceed 54 inches in height, 43 inches in length and 52 inches in width.

The containers shall be bonded onto wing type commercial 4-way entry pallets.

Note: All palletized loads shall contain only one NSN, to the maximum extent possible. When there is less than a pallet load per NSN, pallets may have containers not of the same NSN, but the pallet shall be clearly marked "mixed" and each applicable NSN shall be listed together with its total quantity.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

ASTM-D 3951 - Standard Practice for Commercial Packaging

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Custodian:
Army - GL


Review Activity:
Army - MD

Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

Project No. 8415-0907

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

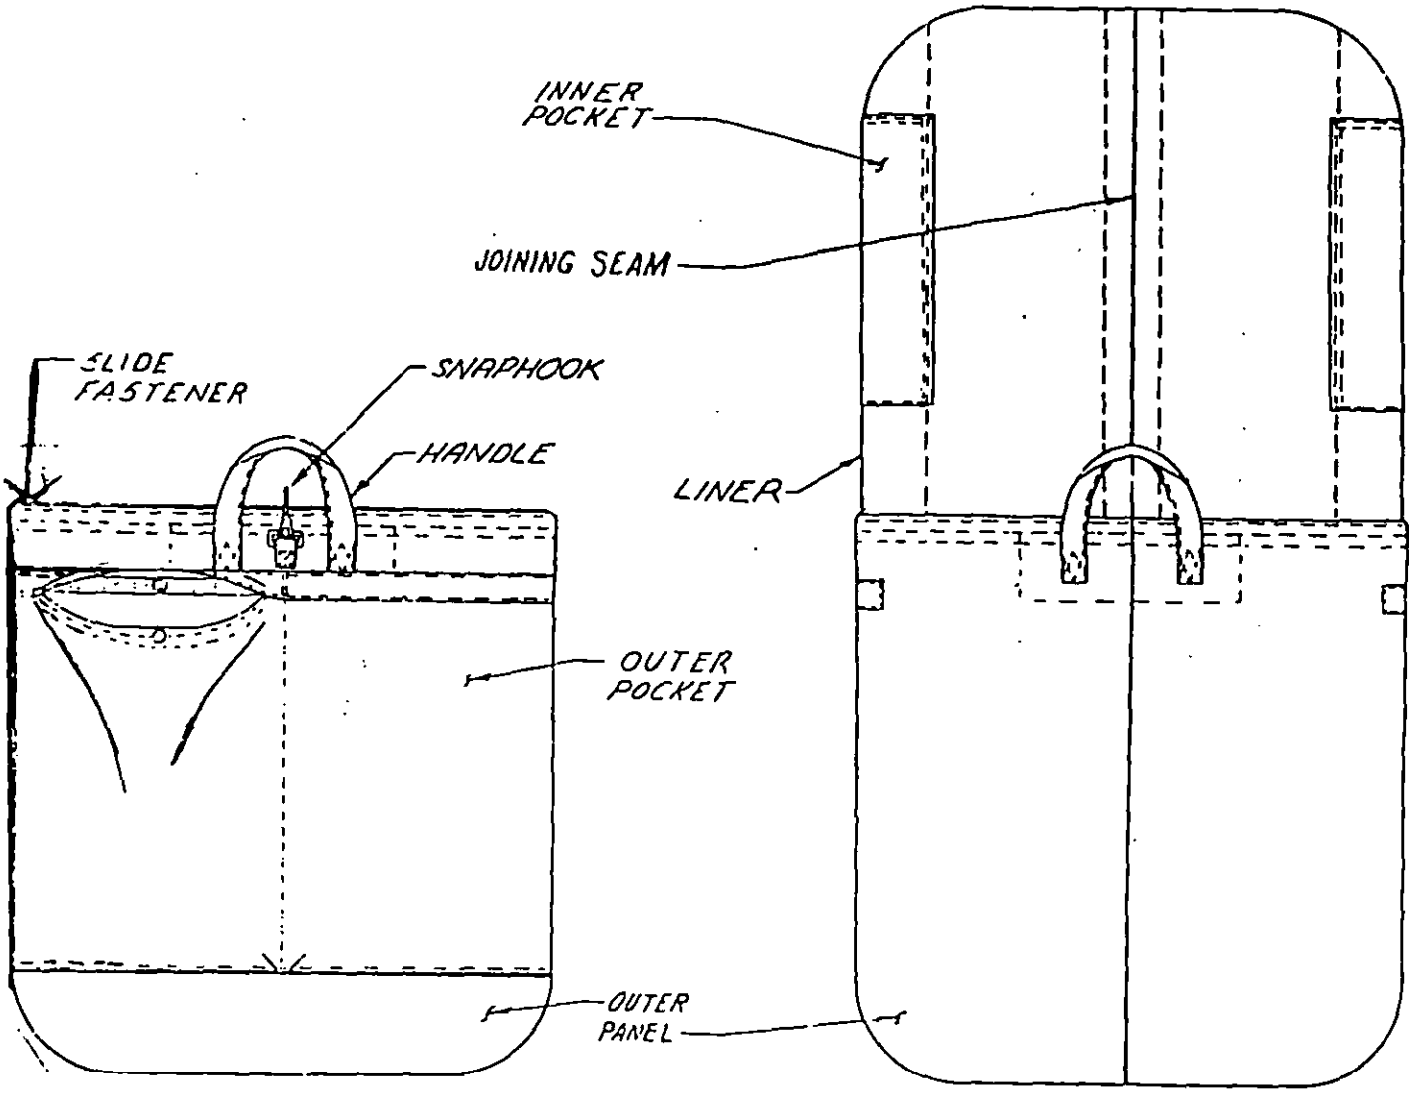

FRONT

BACK (Shown without liner stitched to outer panel at bottom)

FIGURE 1. BAG, FLYER'S HELMET

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55112	921223

3. DOCUMENT TITLE
BAG, FLYER'S HELMET

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON *(If applicable)*	7. DATE SUBMITTED *(YYMMDD)*

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE *(Include Area Code)*	
Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	(1) Commercial 215-737-8105	(2) AUTOVON 444-8105
c. ADDRESS *(Include Zip Code)* 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198-390

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.