INCH-POUND
A-A-55112B
December 6, 2021
SUPERSEDING
A-A-55112A
June 19, 1995

COMMERCIAL ITEM DESCRIPTION

BAG, FLYER'S HELMET

The General Services Administration has authorized the use of this commercial item description (CID) by all federal agencies.

1. SCOPE. This commercial item description covers one type of flyer's helmet carrying bag.

2. CLASSIFICATION. The bag shall be of one (1) size and type as described in sections 3.1 of this document.

3. SALIENT CHARACTERISTICS.

3.1 Description. The flyers helmet bag shall consist of an outer panel with a liner. The bag shall have two inner pockets, one at each end of the liner, and two outer pockets on the front of the bag. The bag shall have matching grip handles on the front and back, with a slide fastener for closing the bag, and nylon tape fastener and snap fasteners for closing the outer pockets (see Figure 1).

3.1.1 Figures. Figures 1 and 2 are furnished for informational purposes only. To the extent of any inconsistencies between the written document and the figures, the written document shall govern.

3.2 Materials.

3.2.1 Cloth, nylon. The plain weave, nylon cloth for the outer and inner panel, outer pockets, protector flap, grip handle reinforcements, and grip handle panels shall be a durable water-repellent-treated cloth and it shall conform to the requirements specified in Table I.
The color shall be shade Camouflage Green CG-483.

Beneficial comments, recommendations, additions, deletions, clarifications, and any data that may improve this document should be sent to: Attn: DLA Troop Support, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Since contact information can change, verify the currency of the address information using Acquisition Streamlining and Standardization Information System (ASSIST) online database https://assist.dla.mil.

FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

3.2.2 Batting, polyester. The material for the bag liner and grip handle pad shall be quilted polyester batting and ripstop nylon cloth. The ripstop construction shall be as specified in Figure 2. The cloth outer covering is required on one side of the batting only and the straight-line quilting stitching shall be six (6) inches apart. The batting and ripstop cloth shall conform to the requirements specified in Table I. The requirements for colorfastness shall not apply to nylon outer gloss.

3.2.3 Webbing, nylon, 1-inch. The nylon webbing for attaching the snap hook shall be 1-inch wide, color Camouflage Green CG-483, double fabric consisting of two warps bound together by a single filling and a binder-warp.

3.2.4 Color. The color shall be Camouflage Green CG-483 or as specified in the contract or purchase order. The finished cloth shall match the standard sample for shade and appearance and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 7.3).

3.2.4.1 Visual shade matching. The color and appearance of the material shall match the standard sample when viewed using the AATCC EP9, Evaluation Procedure for Visual Assessment of Color Difference of Textiles, Option C (see 7.6), with sources simulating artificial daylight D_{75} illuminant with a color temperature of 7500 (± 200) K illumination of 100 (± 20) foot candles, and shall be a good match to the standard sample under incandescent lamplight at 2856 (± 200) K.

TABLE I. Physical and colorfastness requirements.

Characteristic	Requirement	Test Method
Cloth, nylon:		
Fiber identification	See 3.2.1	AATCC TM20 (See 7.7)
Weave	Plain	Visual
Weight, oz./sq.yd.	3.8 – 4.8	ASTM D3776/D3776M, Option C
Breaking strength, pounds (min.) Warp Filling	 275 225	ASTM D5034
Air permeability, cu.ft/min./sq.ft (min.)	2.0	ASTM D737

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

TABLE I. Physical and colorfastness requirements. - Continued.

Characteristic	Requirement	Test Method
Colorfastness: (min.) Laundering (3 cycles) (color change and staining) Crocking (wet and dry) Weathering (after 80 AFU) 3/	 4 4 4	 AATCC TM61 Test 3A 1/ AATCC TM8 2/ AATCC TM111, Option A
Spray rating (min.) Initial After 3 launderings	 100, 100, 90 80, 80, 70	 AATCC TM22 AATCC TM135, (3), (V), (Aiii) and AATCC TM22
Hydrostatic height (min.) Initial After three launderings	 40 cm 50 cm	 AATCC TM127 AATCC TM135, (3), (V), (Aiii), and AATCC TM127
Resistance to organic liquid (min.) Initial After three launderings	 No wetting by n-tetradecane after 30 seconds Same as initial	 AATCC TM118 AATCC TM135, (3), (V), (Aiii) and AATCC TM118
Cloth, batting polyester:		
Weave (ripstop nylon cloth)	Plain	Visual
Weight, oz./sq.yd. (min.) Polyester batting Ripstop nylon	 4.0 1.1	 ASTM D3776/D3776M, Option C
Yarns per inch (ripstop nylon), (min.) Warp Filling	 120 120	 ASTM D3775
Straight-line quilting stitching, inches apart	6	Calibrated ruler

1/ Rated using the AATCC EP1, Evaluation Procedure for Gray Scale for Color Change and AATCC EP2, Evaluation Procedure for Gray Scale for Staining.
2/ Rated using the AATCC EP8, Evaluation Procedure for AATCC 9-Step Chromatic Transference Scale.
3/ AFU: AATCC Fading Units

3.2.5 Thread, polyester. The thread for all stitching shall be polyester in accordance with Type I, Class1, Subclass B of A-A-59963. The color shall be Camouflage Green CG-483.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

3.2.5.1 Stitches and stitching. Stitching for the attachment of grip handles requires a 3-point double "W" pattern stitched 1 to 1-1/8-inch long and 3/4 to 7/8-inch wide. As an alternate, stitch the end of each handle to the bag with two 3/4-inch long bartacks across the width of the handle. Position the first bartack 1/8(± 1/16)-inch from the end of the handle and the second 5/8(± 1/16) -inch from the first handle and the second 5/8 (± 1/16)-inch from the first bartack. To stitch the webbing to the bag, use a 1 to 1-1/8 by 3/4 to 7/8-inch "box-X" pattern stitched through the front side of the bag. As an alternate attach the webbing with two 3/4-inch long bartacks across the width of the webbing with the first bartack located 3/16(± 1/16)-inch from ends of webbing and the second bartack located 3/4 (± 1/16)-inch from the first. Bartacks when applicable shall be 3/4 (minimum) inch wide by 1/8 (minimum) inch long and shall contain a minimum of 42-inches. All other stitching can be either lockstitch or chainstitch as designated.

3.2.6 Fastener, nylon tape. The nylon tape fastener for closure of pockets shall be 5/8-inch in width, shade Camouflage Green CG-483, nylon 8.0 mil hook (330 denier).

3.2.7 Fastener, slide, interlocking. The slide fastener shall be a non-separating, non-reversible, non-locking, size Medium Heavy Special (MHS), individual element brass or continuous element monofilament coil or ladder configuration chain. The length of the chain shall be as required for closure of the bag opening. The slide fastener pull shall have a thong with a finished length of 2-1/2 to 3-1/2-inch and shall be Camouflage Green 483 in color. The ends of the thong shall be seared or dipped in a colorless, noncombustible resin to prevent raveling. The thong shall be attached to the slider tab pull and with the ends even, bar tacked together with a 3/4-inch vertical bar tack positioned 1/2 to 3/4-inch from the end of the slide fastener pull. Colorfastness and water repellency for the tape shall be similar to the nylon material. The closed bottom stop shall be a staple type, and slider identification marked. As an alternate to the staple stop, a bartack that will pass through the slide fastener can be used. The bartack shall be 1/2-inch wide and placed 1/2 (±1/8)-inch from the top edge of the bag. the thread type for the needle shall be "E" and the thread type for the bobbin shall be "B".

3.2.8 Fastener snap. The snap fasteners for closing the outer pockets shall be of the small wire spring clamp type. They shall be bronze with a black chemical finish. The eyelet shall be size 2 and the button shall be size 1.

3.2.9 Snap hook 1-inch. The snap hook shall be a 1-inch, steel carbon wire body; fixed loop eye; flat spring closure with retainer; with a zinc coating, followed by an enamel finish.

3.3 Label. Each bag shall have an identification label in accordance with Type VI, Class 5 of MIL-DTL-32075 or a commercial type label containing the following information:

ITEM NAME:
CONTRACTOR'S NAME:
CONTRACT NUMBER:
NSN:
CAGE CODE:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

3.3.1 Bar coded hang tag. Each item shall be individually bar-coded with a paper tag. The paper used for the tags shall have a smooth finish that has the capability to accept thermal transfer and direct thermal printing with a basis weight of 100 pounds (per commercial practice for tags). The tags shall have a hole with its center no more than 1/2 (±) 1/8 inch from the tying end and shall be attached to the bag by a commercial fastener. The bar coding element shall be a 13-digit national stock number (NSN). The barcode type shall be used with a medium to high code density and shall be clearly legible and readable by a scanner. The label shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and so that it causes no damage to the item.

3.4 Patterns. The Government shall furnish a single size pattern. Commercial patterns may be used in lieu of the Government-furnished pattern provided they conform to the cited design and finished measurements.

3.5 Finished measurements. The finished bag shall conform to the measurements as specified in Table II.

TABLE II. Finished measurements.

Location	Measurement (inches)	Tolerances (inches)
Width 1/	19-1/4	± 1/2
Length 2/	20	± 1/2
Outer pockets (width at center of pocket)	9-1/2	± 1/4
Outer pockets (length at center of pocket)	14	± 1/4
Inner pockets (width at center of pocket)	6-3/4	± 1/4
Inner pockets (length at center of pocket)	10-1/4	± 1/4

1/ Measure across center of bag on back panel.
2/ Measure from center lower edge of bag to top edge of bag. (Do not include slide fastener.)

3.6 Workmanship. The finished bag shall conform to the quality of the product established in this document. The bag shall be free from defects which would affect its serviceability, appearance, uniformity and quality assurance standards defined by the technical data in the bid package.

4. REGULATORY REQUIREMENTS. Unless otherwise specified, the offeror/contractor is encouraged to use recovered, recycled, bio based, and environmentally preferable materials to the maximum extent practicable, in accordance with paragraph 23.403, 23.404(b) of the Federal Acquisition Regulation FAR, or the sustainable acquisition of EO 13693; as applicable. (See 7.1.2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The bag shall meet the salient characteristics of this Commercial Item Description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

5.2 Market acceptability. The bag offered or generic equivalent, must have been sold to the government or commercial market.

5.3 Visual examination. Each bag shall be examined for the defects listed in Table III in accordance with ASQ/ANSI-Z1.4. The lot size shall be expressed in units of one (1) bag. The sample unit shall be one (1) bag.

TABLE III. Visual examination defects.

Material defects: Any hole, cut, tear, permanent fold, or crease; any spot or stain on outside, nylon webbing not firmly and tightly woven, ends not fused or edges frayed or scalloped; discoloration or color not as specified, any outwardly visible part shaded; general hardware (snap fasteners, slide fasteners and snap hooks) not functioning properly, (i.e., fails to provide a secure closure or to open freely, or not of a specified type or size); objectionable odor.
Stitches, seams and stitching: Open seams more than 1/2 inch; wrong seam or stitch type; three or more stitches per inch less than minimum specified; any seam excessively pleated or puckered; any stitching row omitted, except on double "W' stitch pattern; two or more rows omitted on double "W" stitch pattern; bartack stitching loose, incomplete or broken or bartack omitted; one or more box stitches missing, loose or tight stitching tension, or not size specified; bag liner not stitched to bag at bottom; any component part omitted or any part caught in an unrelated operation or stitching; broken or skipped stitches, needle chew, raw edge, thread ends not removed, any seam slippage, re-stitching, distorted, open, pulled or snagged stitches, twisted, ragged or inconsistent edge.
Workmanship: Any component part twisted, misplaced or distorted parts; poorly shaped, pockets out of alignment, any dimension of item not as specified; design not as specified. Failure to meet product conformance; serviceability, reliability and quality of materials as defined by this document.
Labels: Label(s) missing, incorrect, or illegible; bar code or UCP code label omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded packaged item, bar code label causes damage to the item.
Packaging: Not packaged in accordance with the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

5.4 Dimensional examination. The finished bag shall conform to the dimensions specified in Table II, when measured as stated. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one (1) bag.

5.5 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order (see 7.5).

6 PACKAGING. The preservation, packing and marking shall be as specified in the contract or order (see 7.5).

7 NOTES.

7.1 Source of Government documents:

7.1.1 Copies of Government documents are available online at https://quicksearch.dla.mil.

7.1.2 EPA and EO 13693 information are available online at https://www.epa.gov.

7.1.3 Federal Acquisition Regulations (FAR) are available online at https://acquisition.gov.

7.2 Source of non-Government documents.

7.2.1 AATCC Standards are available for purchase online at https://www.aatcc.org.

7.2.2 ASTM Standards are available for purchase online at https://www.astm.org.

7.2.3 ASQ/ANSI Z1.4 – Sampling Procedures are available online at https://www.asq.org.

7.3 Intended use. The bag is intended for use by aviation personnel of the Department of Defense and is designed to hold the flyer's helmet and auxiliary equipment.

7.4 Standard samples. For access to standard shade samples of cloth, address the contracting activity issuing the invitation for bids or request for proposal.

7.5 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this commercial item description
b. Color required (see 3.2.4)
c. Product conformance provisions (see 5.1)
d. Acceptance criteria (see 5.5)
e Packaging requirements (see 6.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

7.6 Visual shade matching. In 2017, Option A of AATCC Evaluation Procedure 9, Visual Assessment of Color Difference of Textiles was changed to Option C. NOTE: In case of confusion, the viewing geometry should be "The specimen plane and illumination source will be parallel to each other and aligned so that the light flux is incident at the center of the specimen plane, which is set at a 35 (± 5º) angle relative to the horizontal. The observer will view the specimens at a 90º angle, relative to the plane of the specimens."

7.7 Certificate of compliance. The contracting activity may select to accept a certificate of compliance for a stated requirement.

7.8 Key words.

Cloth, nylon
Grip, handle
Protector, flap
Rip stop weave pattern


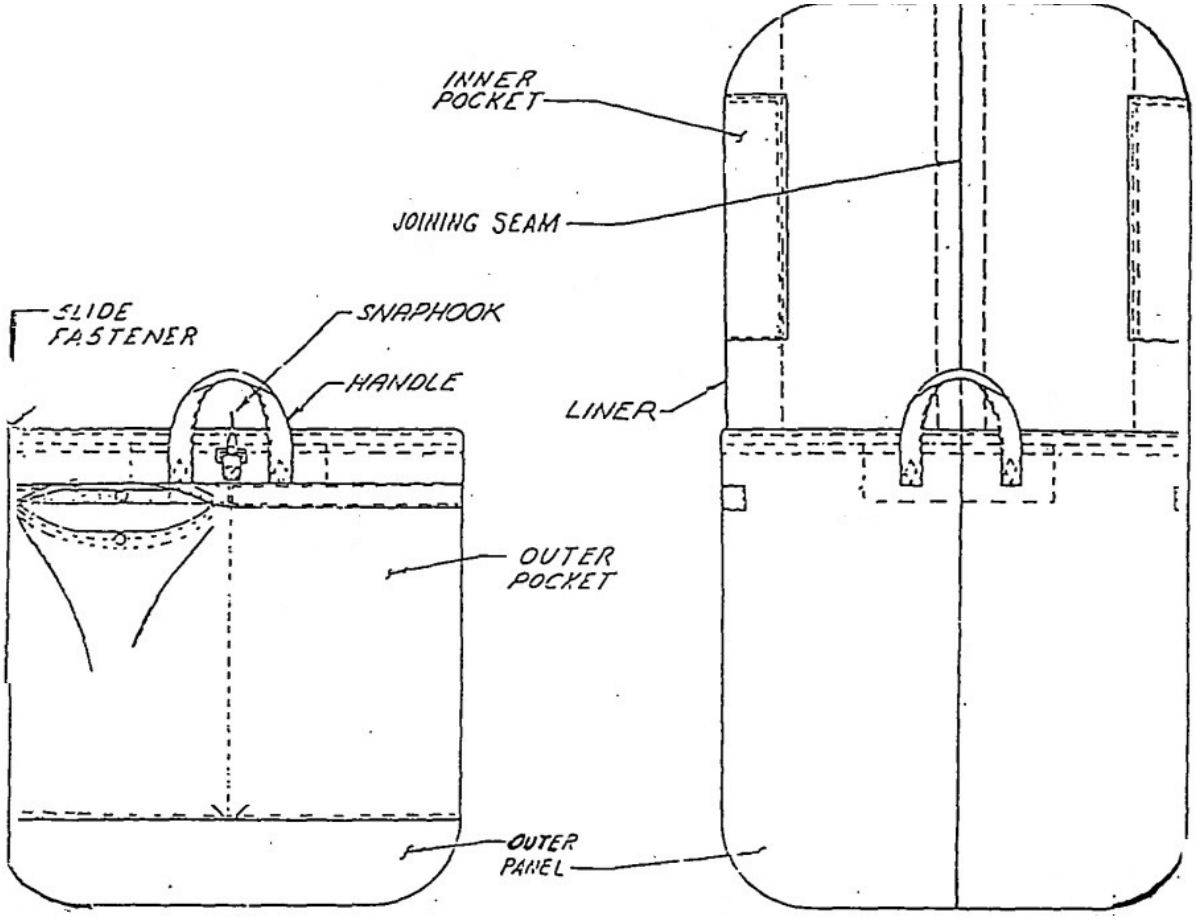


FIGURE 1. Bag, Flyer 's Helmet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

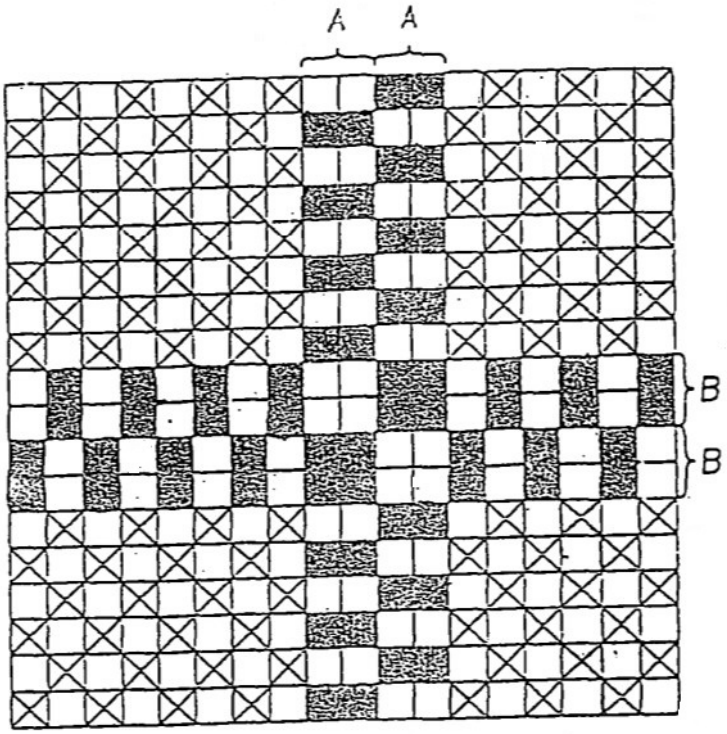

A = TWO WARP ENDS WOVEN AS ONE

B = TWO FILLING PICKS PER SHED

FIGURE 2. Ripstop Weave Pattern.

MILITARY INTERESTS:

Custodians:
Army - GL
Air Force -11

Review activities:
Army - MD

CIVIL AGENCY COORDINATING ACTVITY:
GSA-FAS

Preparing Activity
DLA-CT

(Project: 8415-2022-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.