INCH-POUND

A-A-55119
23 March 1993

COMMERCIAL ITEM DESCRIPTION

GLOVE INSERTS, COLD WEATHER

This Commercial Item Description is authorized for use in preference to MIL-G-835.

Abstract. This Commercial Item Description covers an ambidextrous, knitted glove insert, to be worn for added warmth with glove shells for cold weather and is intended for wear by Defense Department personnel.

Classification. The gloves shall be in the following types and classes:

Type I	- Non-automatic construction
Type II	- Automatic construction
Class 1	- Camouflage Green 483
Class 2	- Gray 1155

Salient characteristics. The glove inserts shall be ambidextrous design with knitted hands, fingers and thumbs. All parts of the gloves except the cuffs shall be knit seamless with a plain (jersey) stitch. The cuffs for type I construction shall be a true 1 x 1 rib knit. The cuffs for type II construction shall be a mock rib knit and have two elastic (spandex) yarns inserted around the top edge of the cuff. The two elastic yarns shall be overedged. Type II gloves shall be made on fully automatic flat bed knitting machines.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Figures. Figures 1 and 2 are furnished for information purposes only. To the extent of any inconsistencies between the written Commercial Item Description and the figures, the written Commercial Item Description shall govern.

Material.

Yarn. The yarn shall be a wool-nylon blend, mixed, carded, spun and twisted into the counts and turns per inch specified in Table I:

Table I. Yarn counts and turns

	Count of yarn, woolen spun (cut system) (± 1 yarn number)	Turns per inch	
		Single (± 1 turn)	Ply (± 0.5 turn)
Type I			
Hand, fingers, and thumb	1 end 2/15	10	4
Cuff	1 end 3/15 or 1 end 1/15 and 1 end 2/15	10	4
Type II			
Hand, fingers, thumb, and cuff	1 end 2/15	10	4

Wool. The wool shall be virgin fleece or pulled sheep's wool, or a blend of both, not lower in grade than 56's US Standard. The use of noils, card fly, card stripping, reused wool, reprocessed wool, fiber obtained from knitting clips, garnetted hard ends, and similar waste is prohibited.

Nylon. The nylon shall be 6 denier virgin nylon, crimped and cut to a staple length of not less than 2-3/8 inches nor more than 3-1/8 inches.

Non-fibrous materials. The finished glove inserts shall contain not more than 3.0 percent starch and protein content including chloroform-and water-soluble material and shall be in accordance to ASTM-D 629, Section 9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Fiber content. The wool/nylon blended portion of the finished glove inserts (based on a dry, extracted and desized basis) shall contain not less than 25% percent nor more than 32% nylon with the remainder all wool and shall be in accordance with Test Method 2611 of FED-STD-191.

Thread. For type I construction, the thread for sewing (closing) the tips of the thumb and fingers shall be polyester, spun, class 1 or 2 of MIL-T-43624. Ticket No. 50, 3 ply shall be used as the needle thread and ticket No. 70, 3 ply shall be used as the looper thread. For type II construction in overedging the top of the cuff, the thread for the needle and one of the loopers shall be polyester, cotton-covered, ticket No. 70, 2 ply conforming to A-A-50199. The same yarn used to knit the inserts, except that it will be one end of singles 15's, shall be used in the other looper so that the yarn is on the outside edge of the cuff.

Color. The color of the glove insert shall be Camouflage Green 483. The thread shall be dyed Camouflage Green 483 for the class 1 glove insert and Medium Gray AV C.A. 66062 for the class 2 glove insert. The glove insert including thread shall show fastness to laundering and perspiration equal to or better than the standard sample. When no sample is available, the thread shall show good fastness to laundering and perspiration. The color shall match the standard sample when viewed under filtered tungsten lamps which approximate artificial having a correlated color temperature of 7500 $\pm$ 200 k, with illumination of 100 $\pm$ 20 foot candles, and shall be a good match to the Standard Sample under incandescent lamp light at 2300 $\pm$ 200 K. The color shall be obtained by yarn or stock dyeing only, speck dyeing is prohibited.

Colorfastness. The dyed glove inserts shall show fastness to laundering and perspiration equal to or better than a rating of "good" when tested as specified: laundering - AATCC 61 and perspiration - AATCC 15.

Elastic yarn (for type II). The elastic yarn for every other course of cuff shall be made of spandex 210 denier (nominal size) with an inner and outer covering of 100 denier, 2 ply, stretch nylon yarn. The color of the stretch nylon yarn for the class 1 glove shall be Camouflage Green 483, and Gray 1155 for the class 2 glove.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Label/marking. The label/marking shall be a heat transfer (decalcomania), direct printing, stamping, or stenciling combination identification and size label for handwear. The color of the marking medium shall be white. The class 1 inserts shall have the label applied to the outside of the cuff 1/2 ± 1/16 inch down from the top edge. As an alternate, the class 1 glove inserts may have the label applied to the outside of the insert 1/2 ± 1/16 inch down from the inside edge of the ribbed cuff. The class 2 glove insert shall have the label applied to the inside of the cuff 1/2 ± 1/16 inch down from the top edge. The marking shall be clearly legible and show good fastness to laundering. The label legend and size of characters shall be as follows:

Size (minimum 1/2 inch)
Nomenclature and type (minimum 1/4 inch)
Contract No. (minimum 1/4 inch)
Stock No. (minimum 1/4 inch)
Contractor's Name (minimum 1/4 inch)
Wool Products labeling act information (minimum 1/4 inch)

Instruction label. A printed slip of paper containing the following instructions shall be inserted in each glove insert.

WEARING INSTRUCTIONS

GLOVE INSERTS, COLD WEATHER

For duty always wear wool inserts inside of glove shells, leather. If too warm, wear glove shells, leather without inserts.

Fitting - Be sure the wool inserts are the same size as the leather glove shells with which they will be used.

Interchange - The wool inserts fit either right or left hand. Alternate them to make them wear longer.

Keep inserts clean - Wash in lukewarm or cold water with mild soap. Hot water will shrink inserts badly. Dry inserts slowly, away from extreme heat or flame.

Sizes and measurements. The finished glove inserts shall conform to the requirements specified in Table II and III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

TABLE II. Requirements (type I construction)

	Figure 1 reference	Size					Tolerance
		1	2	3	4	5	plus or minus
Machine cylinder diameter for knitting cuff and hand (in.)	---	3-1/4 - 3-3/4	3-1/4 - 3-3/4	3-3/4 - 4-1/4	3-3/4 - 4-1/4	4-5	----
Cuff:							
No. of needles	---	52-56	56-60	60-64	64-68	68-72	----
Length (inches)	M	4	4	4	4	4	1/4
Total courses	M	44-48	44-48	44-48	44-48	44-48	----
Width (in.) (center)	N	2-3/4	3-1/8	3-1/2	3-7/8	4-1/4	1/4
Hand:							
No. of needles	---	52-56	56-60	60-64	64-68	68-72	----
Total courses	S	44-48	47-51	50-54	53-57	56-60	----
Width (in.)	R	3	3-3/8	3-3/4	4-1/8	4-1/2	3/16
Thumb:							
No. of needles at base	---	24	26	28	30	32	----
Courses to narrow of thumb	---	10	10	10	10	10	----
No. of needles after narrowing	---	20	22	24	26	28	----
Total courses	A	31-33	33-35	35-37	37-39	39-41	----
Length (in.)	A	2-5/16	2-1/2	2-11/16	2-7/8	3-1/8	1/8
Width (in. 1-1/2 inches from tip)	B	1-1/8	1-1/4	1-3/8	1-1/2	1-5/8	1/8
Location (courses from cuff)	L	18-20	20-22	22-24	24-26	26-18	----

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

TABLE II. Requirements (type I construction) (cont'd)

	Figure 1 reference	Size					Tolerance plus or minus
		1	2	3	4	5	
First finger:							
No. of needles	---	18-19	19-20	20-21	21-22	22-23	----
Total courses	C	28-30	30-32	32-34	34-36	36-38	----
Length (in.)	C	2-5/16	2-1/2	2-11/16	2-7/8	3-1/8	1/8
Width (in.) (middle of finger)	D	1	1-1/16	1-1/8	1-1/4	1-3/8	1/8
Second finger:							
No. of needles	---	18-19	19-20	20-21	21-22	22-23	----
Total courses	E	33-35	35-37	37-39	39-41	41-43	----
Length (in.)	E	2-5/8	2-7/8	3-1/8	3-3/8	3-5/8	1/8
Width (in.) (middle of finger)	F	1	1-1/16	1-1/8	1-1/4	1-3/8	1/8
Third finger:							
No. of needles	---	18-19	19-20	20-21	21-22	22-23	----
Total courses	G	30-32	32-34	34-36	36-38	38-40	----
Length (in.)	G	2-1/2	2-11/16	2-7/8	3-1/16	3-1/4	1/8
Width (in.) (middle of finger)	H	1	1-1/16	1-1/8	1-1/4	1-3/8	1/8
Fourth finger:							
No. of needles	---	16-17	17-18	18-19	19-20	20-21	----
Total courses	J	20-22	22-24	24-26	26-28	28-30	----
Length (in.)	J	1-3/4	1-7/8	2-1/16	2-1/4	2-3/8	1/8
Width (in.) (middle of finger)	K	7/8	15-16	1	1-1/16	1-1/8	1/8
Length of hand and fingers (in.)	O	6-3/4	7-1/8	7-1/2	8	8-1/4	1/4
Overall length (in.)	P	10-3/4	11-1/8	11-1/2	12	12-/14	1/2
Weight per dozen pairs (ounces) minimum	---	19	20	24	25	26	----

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

TABLE III. Requirements (type II construction)

	Figure 2 reference	Size					Tolerance plus or minus
		1	2	3	4	5	
Cuff (Mock Rib):							
No. of needles	----	74	74	84	84	92	----
Total courses (min.)	M	44	44	48	48	48	----
Length (inches)	M	4	4	4	4	4	1/4
Width (inches) (center)	N	3	3	3-1/4	3-1/4	3-1/2	1/4
Base of thumb to fingers:							
No. of needles	----	58	58	66	66	74	----
Total courses (min.)	T	20	20	28	28	30	----
Length (inches)	T	1-1/2	1-3/4	2	2-1/4	2-1/2	1/8
Width (inches)	R	3-1/2	3-1/2	3-3/4	3-3/4	4	1/4
Cuff to base of thumb:							
No. of needles	----	74	74	84	84	92	----
Total courses (min.)	L	20	20	26	26	28	----
Width (inches) (measured 1 inch above mock rib)	S	4-1/4	4-1/4	4-1/2	4-1/2	4-3/4	1/4
Thumb:							
No. of needles	----	20	20	22	22	24	----
Total courses (min.)	A	30	32	32	36	40	----
Length (inches)	A	2-3/8	2-1/2	2-5/8	2-7/8	3-1/8	1/8
Width (inches)	B	1	1-1/16	1-1/8	1-1/4	1-3/8	1/8
First finger:							
No. of needles	----	18	18	20	20	22	----
Total courses (min.)	C	30	32	32	36	40	----
Length (inches)	C	2-1/4	2-3/8	2-1/2	2-7/8	3-1/8	1/8
Width (inches)	D	1	1-1/16	1-1/8	1-1/8	1-3/8	1/8
Second finger:							
No. of needles	----	18	18	20	20	22	----
Total courses (min.)	E	36	38	38	42	46	----
Length (inches)	E	2-7/8	3	3-1/8	3-1/2	3-5/8	1/8
Width (inches)	F	1	1-1/16	1-1/8	1-3/16	1-3/8	1/8

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:42Z
Check the source to verify that this is the current version before use.

TABLE III. Requirements (type II construction) (cont'd)

	Figure 2 reference	Size 1	2	3	4	5	Tolerance plus or minus
Third finger:							
No. of needles	----	18	18	20	20	22	----
Total courses (min.)	G	32	34	34	38	42	----
Length (inches)	G	2-1/2	2-5/8	2-3/4	3-1/16	3-1/4	1/8
Width (inches)	H	1	1-1/16	1-1/8	1-3/16	1-3/8	1/8
Fourth finger:							
No. of needles	----	16	16	18	18	20	----
Total courses (min.)	J	24	26	26	30	34	----
Length (inches)	J	1-7/8	2	2-1/8	2-3/8	2-1/2	1/8
Width (inches)	K	7/8	15/16	1	1-1/16	1-1/8	1/8
Length of hand and fingers	O	6-1/4	6-3/4	7	7-1/2	8	1/4
Overall length (inches)	P	10-1/4	10-3/4	11	11-1/2	12	1/2
Weight per dozen pair (ounces) minimum	----	19	21	24	26	28	----

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Pairing. The finished glove inserts shall be paired according to size and class. They shall not be tacked.

Construction. For type I construction, the hand and cuff shall be a circular knit on machines with cylinder diameters as specified in Table II. The cuff, hand, thumb, and fingers shall be knit using the number of needles and courses specified in Table II. Type II construction, the fingers, thumbs, hand and cuff shall be knit on a fully automatic flat bed glove knitting machine. The cuff, hand, thumb, and fingers shall be knit using the number of needles and courses specified in Table III.

Cuff. For type I construction, the cuff shall be knit seamless with a true 1 by 1 rib and shall have a non-raveling welt at the top edge. For type II construction, the cuff shall knit seamless with a mock rib with an elastic yarn, laid in every other course. The top edge of the cuff shall be overedged with either stitch type 504 or 505, 14 to 16 stitches per inch, stitching type similar to EFd and 3/16 to 1/4 inch gage. The elastic overedge top of the cuff shall be made by laying in two elastic (spandex) yarns around the top edge of the cuff and stretched as they are being overedged. The two stretched elastic yarns and the overedge stitching shall be sewn around twice and overlapped not less than 1/2 inch. Care shall be taken to assure the first row of stitching is not cut by the trimming knife when sewing the second row. All loose thread ends shall be trimmed to 1/4 $\pm$ 1/16 inch from the surface of the glove. The number of needles and courses shall conform to tables II and III and testing shall be visual, pass or fail.

Hand. For type I construction, the hand shall be knit seamless with a plain (jersey) stitch. For type II construction, the hand shall be knit seamless on a fully automatic flat bed machine with a plain (jersey) stitch. The number of needles and total courses shall conform to tables II and III and testing shall be visual, pass or fail.

Thumb. For type I construction, the thumb shall be knit seamless with a plain (jersey) stitch. The thumb shall be joined to the hand with the center of the thumb in line with the plane of the hand and the fingers so that each glove insert may be worn on either the right or left hand. The thumb shall be knitted 10 courses, narrowed 4 needles (one on each side of thumb both front and back) and then knit straight to the specified length. The tip of thumb shall be drawn together and closed over a form with a rounded end so as to insure a well shaped conical tip. The same yarn as used for knitting the thumb shall be used to close the tip of the thumb. For type II construction, thumb shall be knit seamless with a plain (jersey) stitch. It shall be automatically closed and knitted with the same yarn used for the hand.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Fingers. For type I construction, the fingers shall be knit seamless with a plain (jersey) stitch. Each fingertip shall be drawn together and closed over a form with a rounded end so as insure well shaped conical fingertips. The yarn used for knitting the fingers shall also be used to close the fingertips. For type II construction, the fingers shall knit seamless with a plain (jersey) stitch. They shall be automatically closed and knitted with the same yarn as that is used for the hand. The number of needles and total number of courses shall conform to Tables II and III and testing shall be visual pass or fail.

Finishing. The glove inserts shall be scoured and fulled. After fulling, the inserts shall be brushed on the inside and formed to proper size. The fulling and brushing characteristics of the gloves shall be equal to or better than those of the standard sample. The loose ends of yarn shall be trimmed to within 1/4 to 1/2 inch of surface of knitted fabric.

Workmanship. The finished glove inserts shall conform to the quality of product established by this Commercial Item Description. The occurrence of defects shall not exceed the applicable acceptable quality levels. The finished glove shall be thoroughly cleaned and all loose thread, lint, and foreign matter removed.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor QA systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Examination. Glove insert lots shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Visual Examination. The gloves shall be examined for the defects listed below. The lot size shall be expressed in units of glove inserts. The sample unit is one glove insert. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 1.5.

Defects. The glove insert shall be examined for the following defects:

Any hole, tear, slub, loose or floated end, dropped stitch, opening in any crotch, needle chew, mend, spot, stain, foreign matter.

Any open seam, raw edge, broken stitches.

Any shade not specified, shaded parts area of no dye penetration.

Design and construction not as described.

Any component part missing or not as described.

Any part pleated or caught or twisted in an unrelated row of stitching.

Cuff edge ravelled, cut or frayed, label omitted or illegible.

Any finished dimension not within established tolerances.

Measurement of item not as specified, thin area in fabric.

Any opening in any crotch more than 1/8 inch in diameter.

More or less than specified courses or needles overedge not overlapped.

Dimensional Examination. The finished glove insert shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one glove insert; the inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 1.5.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:42Z
Check the source to verify that this is the currentversion before use.

Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and AQL, expressed in terms of defects per hundred units, shall be 1.0.

EXAMINE	DEFECT
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling
Content	Number of items per container is more or less than required
	NSN shown on one or more items not as specified on shipping container
Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

End Item Performance Testing. The glove inserts shall have a #3 colorfastness rating to laundering and perspiration when tested in accordance with AATCC Test Methods 61 and 15.

Preservation, Packing, and Marking. The preservation, packing, and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

ASTM-D 629 - Non-fibrous materials

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AATCC 15 - Colorfastness to Perspiration
AATCC 61 - Colorfastness to Laundering, Home, and Commercial: Accelerated

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Triangle Park, NC 27709-2215)

Custodian:
Army - GL
Navy - NU
Air Force - 99

Review Activity:
Navy - AS
Air Force - 11, 82, 45

User Activity:
Navy - MC
Coast Guard - CG

Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

Project No. 8415-0912

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

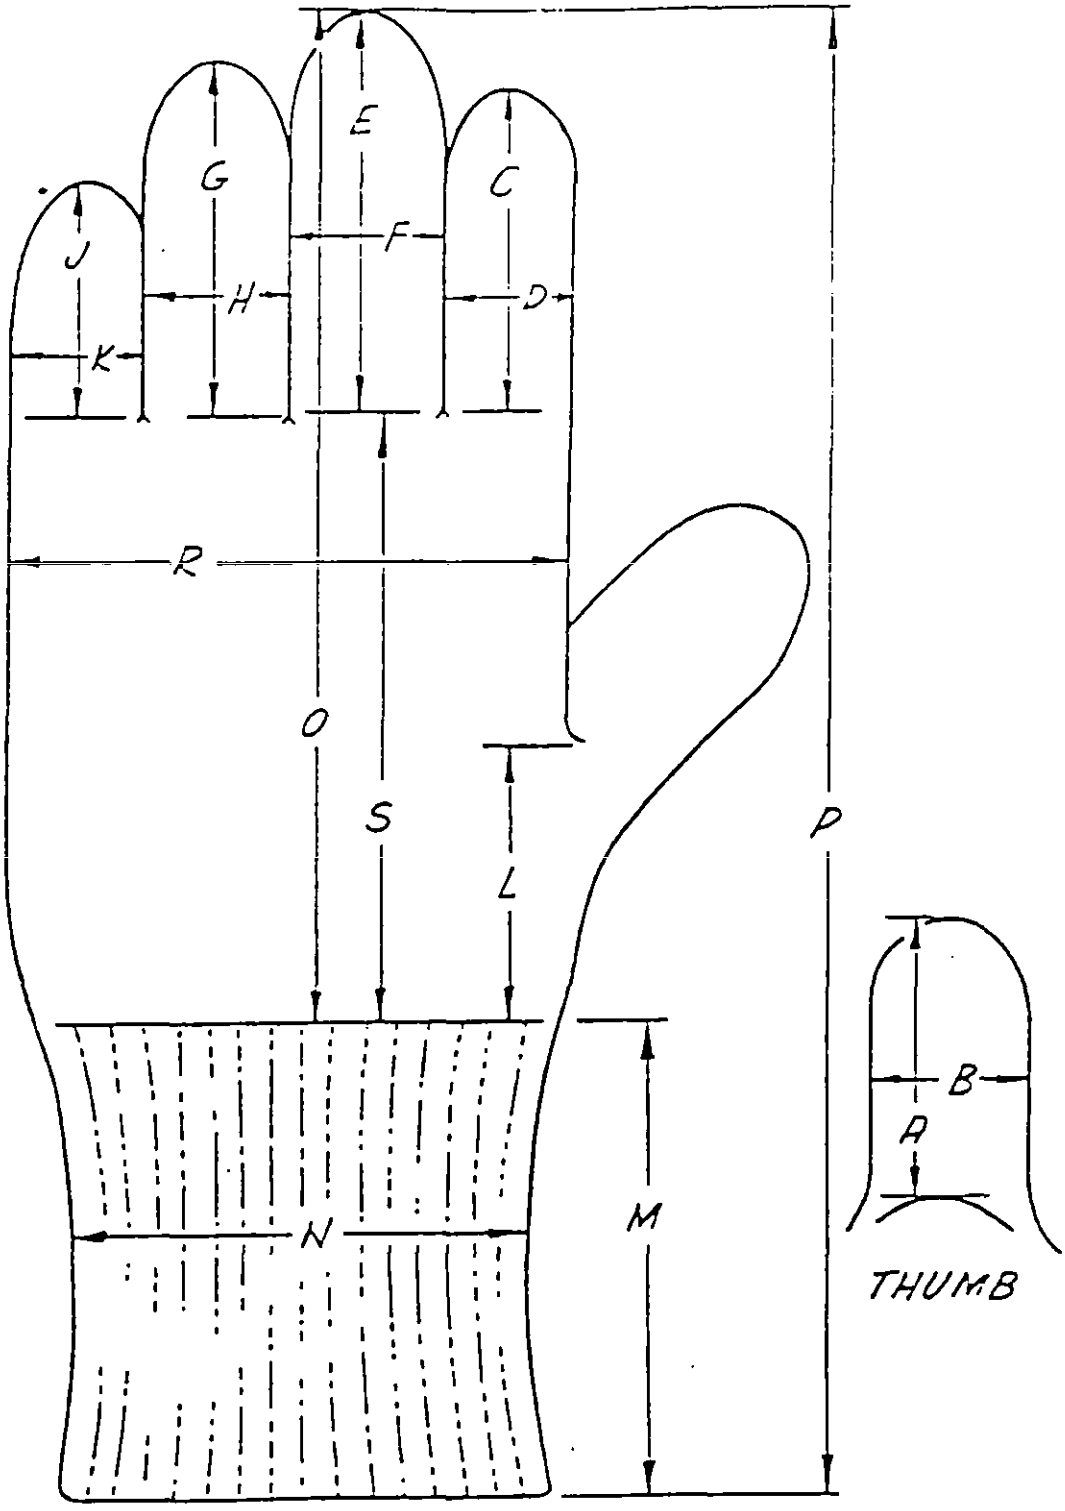


FIGURE 1 - GLOVE, INSERTS, COLD WEATHER
(TYPE I CONSTRUCTION)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

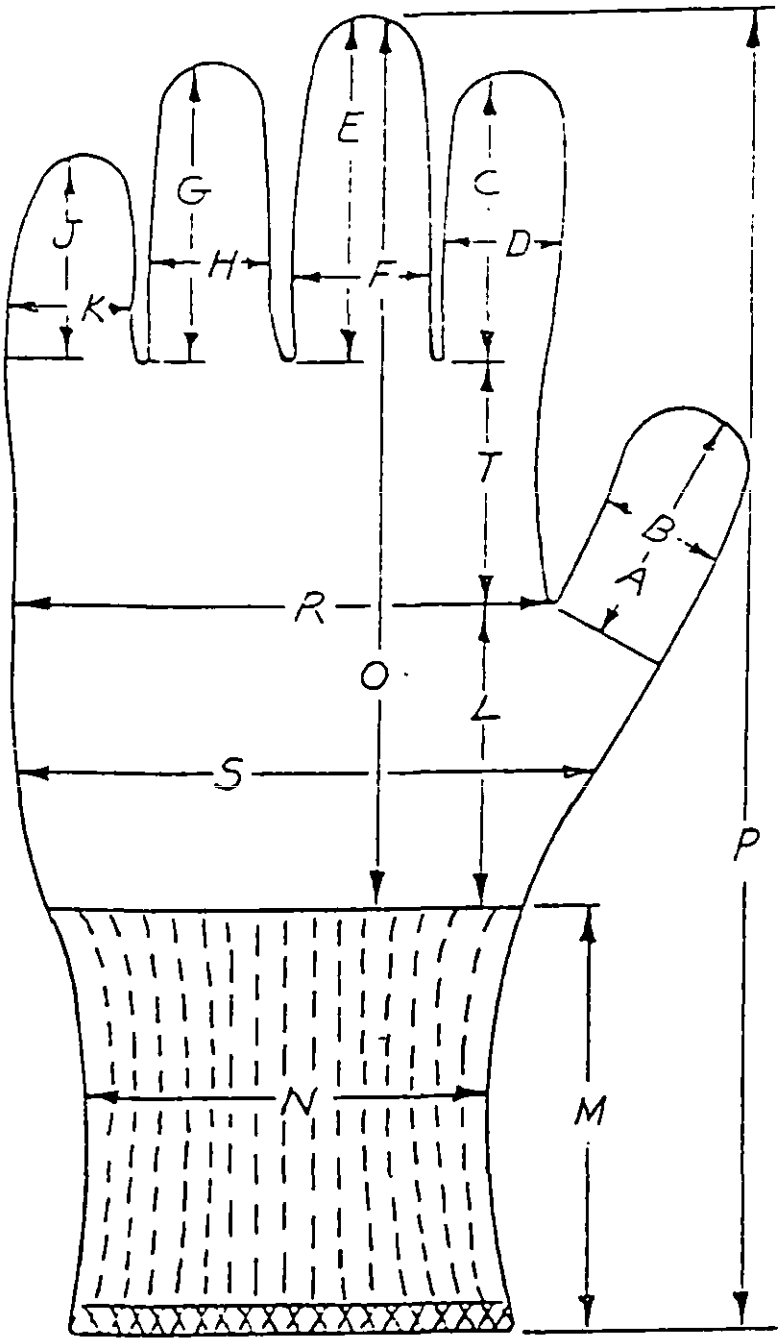


FIGURE 2 - GLOVE, INSERTS, COLD WEATHER
(TYPE II CONSTRUCTION)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER A-A-55119	2. DOCUMENT DATE (YYMMDD) 930323

3. DOCUMENT TITLE
GLOVE INSERTS, COLD WEATHER

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	b. TELEPHONE (Include Area Code) (1) Commercial: 215-737-8105 (2) AUTOVON: 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.