INCH-POUND
A-A-55119A
September 23, 2022
SUPERSEDING
A-A-55119
March 23 1993

COMMERCIAL ITEM DESCRIPTION

GLOVE INSERTS, COLD WEATHER

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for Types I and II MIL-G-835 by all federal agencies.

1. SCOPE. This Commercial Item Description (CID), covers the requirements for a Type I non-automatic construction cold weather glove inserts and a Type II automatic construction glove inserts used by all the Services.

2. CLASSIFICATION. The glove inserts, cold weather shall be of the following Types, Classes, and Sizes:

2.1 Types.

Type I - Non-automatic construction
Type II - Automatic construction

2.2 Classes.

Class l - Camouflage Green 483
Class 2 - Gray 1155
Class 3 - Foliage Green 504
Class 4 - Black 557
Class 5 - Coyote 498

Beneficial comments, recommendations, additions, deletions, clarifications, and any data that may improve this document should be sent to: Attn: DLA Troop Support, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Since contact information can change, verify the currency of the address information using Acquisition Streamlining and Standardization Information System (ASSIST) online database https://assist.dla.mil.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

2.3 Sizes.

X-Small
Small
Medium
Large
X-Large

3. SALIENT CHARACTERISTICS.

3.1 Description. The glove inserts shall be ambidextrous design with knitted hands, fingers, and thumbs. All parts of the gloves except the cuffs shall be seamless knit with a plain (jersey) knit. The cuffs for Type I construction shall be a true 1 x 1 rib knit. The cuffs for Type II construction shall be a mock rib knit and shall have two elastic (spandex) yarns inserted around the top edge of the cuff. The two elastic yarns shall be over-edged.

3.2 Materials.

3.2.1 Yarn. The yarn shall be a 100% worsted wool, long stable yarn as specified in Table I. The 100% worsted wool shall consist of fleece or pulled wool or a combination of fleece and pulled wool of not lower than 45'S U.S standard. The use of reprocessed, reused or waste wool is prohibited. The wool shall be treated for mothproofing in accordance with MIL-DTL-43665.

TABLE I. Wool yarn counts and turns.

Type	Count of yarn, worsted spun (cut system) (± 1 yarn number)	Turns per inch	
		Single-ply (± 1 turn)	Ply (± 0.5 turn)
Type I:			
Hand, fingers, and thumb	1 end 2/15	10	4
Cuff	1 end 3/15	10	4
	or		
	1 end 1/15 and 1 end 2/15	10	4
Type II:			
Hand, fingers, thumb	1 end 2/15	10	4
Cuff	2 ends 2/14.5	10	4
	or		
	1 end 2/18	10	4

3.2.2 Elastic yarn (for Type II only). The elastic yarn for every other course of cuff shall be made of spandex 210 denier (nominal size) with an inner and outer covering of 100 denier, 2-ply, stretch nylon yarn. As an alternate, a rubber core elastic may replace the spandex 210 denier (nominal size); the color of the rubber core shall approximate the color of the end item glove.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

3.2.3 Color. The color shall be Camouflage Green 483 for Class 1, Gray 1155 for Class 2, Foliage Green 504 for Class 3, Black 557 for Class 4, and Coyote 498 for Class 5 or as specified in the contract or procurement documents (see 7.6). The finished glove inserts and all the findings shall match the standard sample for shade and appearance and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 7.4).

3.2.3.1 Visual shade matching. The color and appearance of the knitted material shall match the standard sample when viewed using the AATCC EP9, Evaluation Procedure for Visual Assessment of Color Difference of Textiles, Option C (see 7.4.1), with sources simulating artificial daylight D_{75} illuminant with a color temperature of 7500 (± 200) K illumination of 100 (± 20) foot candles, and shall be a good match to the standard sample under incandescent lamplight at 2856 (± 200) K.

TABLE II. Physical and colorfastness requirements.

Characteristic	Requirement	Test Method
Fiber identification	See 3.2.1, 3.2.2	AATCC TM20 (see 7.5)
Colorfastness, grade (min.):		
Laundering (3 cycles) (color change and staining)	3.5	AATCC TM61 Test 1A 1/
Perspiration (acid and alkaline) (color change and staining)	4	AATCC TM15 1/
Crocking (wet and dry)	3.0	AATCC TM8 2/
Knit type	See 3.5.1-3.5.4	Visual

1/ Rated using the AATCC EP1, Evaluation Procedure for Gray Scale for Color Change and AATCC EP2, Evaluation Procedure for Gray Scale for Staining.
2/ Rated using the AATCC EP8, Evaluation Procedure for AATCC 9-Step Chromatic Transference Scale.

3.3 Thread. For Type I construction, the thread for sewing (closing) the tip of the thumb and fingers shall be polyester, spun in accordance with A-A-59989, Tex 40, 3-ply as the needle thread and Tex. 30, 3-ply as the looper thread. For Type II construction, in over-edging the top of the cuff, the thread for the needle and one of the loopers shall be in accordance with Type I, Tex. 31-35, 2-ply or commercially equivalent thread when tested in accordance with ASTM D2256. The same yarn used to knit the body of the inserts shall be used in the other looper so that the yarn is at the outside edge of the cuff, except that it will be one (1) end of singles 15's wool.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

3.3.1 Stitches, Seams and Stitching. All stitching and seams shall be in accordance with ASTM D6193. For Type I alternate method of construction, the stitching to close the tips of thumb and fingers shall be performed with stitch type 401 and seam type SSa-1 with 10 – 14 stitches per inch. The stitching of the thumb and finger tips shall begin 1/4-inch (± 1/8) below the beginning of the opening, continue around opening to the opposite end of opening and continue stitching 1/4-inch beyond. A chain of 1/4 to 1/2-inch shall be left at the beginning and end of each row of stitches to prevent raveling of the thread and open seams. For Type II construction, the cuff shall be knit seamless with a mock rib with elastic yarn, laid in every other course. The top edge of the cuff shall be over-edged with either stitch Type 504 or 505, 14 to 16 stitches per inch, stitching type EFd and 3/16 to 1/4-inch gauge. The elastic over-edge top of the cuff shall be made by laying in two elastic (spandex) yarns around the top edge of the cuff and stretched as they are being over-edged. The two stretched elastic yarns and the over-edge stitching shall be sewn around twice and overlapped not less than 1/2-inch. Care shall be taken to assure the first row of stitching is not cut by the trimming knife when sewing the second row. All loose thread ends shall be trimmed to 1/4 (± 1/16) inch from the surface of the glove.

3.4 Combination size, identification and instruction label. All glove classes shall have a combination size, identification and instruction label in accordance with MIL-DTL-32075, Type VI, Class 4. An instruction label shall be on the back of the same label as the identification and the size label. The label shall not be greater than 1-1/2 by 1-1/4 inch in dimension and it shall be sewn to the outside of the glove insert. The instruction label shall include the following information:

Hand wash in lukewarm or cold water with soap
No bleach
Air dry away from heat or flame

Wear instructions: A printed slip of paper containing the following wear instructions shall be inserted in each glove insert.

Glove Inserts, Cold Weather

Always wear wool inserts inside of leather glove shells. If too warm, wear leather glove shells, without the inserts.
Fitting: Use the same glove insert size as the leather glove shells with which they will be used.
Interchange. The glove inserts fit either right or left hand. Alternate the glove insert between left and right hand to increase wear life.

3.4.1 Bar code hang tag. Each glove insert set shall have a barcode label/hangtag conforming to Type VIII, Class 17 of MIL-DTL-32075. The bar-coding element shall be a 13-digit National Stock Number (NSN). There shall be a 12-digit Universal Product Code (UPC) number assigned for all NSNs by the contracting activity. The initials “UPC” must appear beneath the code. The barcode for NSN and UPC type shall be a medium to high density and shall be located so that it is completely visible on the glove insert when it is folded and/or packaged as specified and so it causes no damage to the glove inserts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

3.5 Construction. For Type I construction, the hand and cuff shall be a circular knit on machines with cylinder diameters as specified in Table III. The cuff, hand, thumb, and fingers shall be knitted using the number of needles and courses specified in Table III. For Type II construction, the fingers, thumbs, hand and cuff shall be knitted on a fully automatic flatbed glove knitting machine. The cuff, hand, thumb, and fingers shall be knitted using the number of needles and courses specified in Table IV.

3.5.1 Cuff. For Type I construction, the cuff shall be seamless knit with a true 1 by1 rib knit and shall have a non-raveling welt at the top edge. For Type II construction, the cuff shall be seamless knit with a mock rib knit with an elastic yarn, laid in every other course. The number of needles and courses shall conform to Tables III and IV and testing shall be visual: pass or fail.

3.5.2 Hand. For Type I construction, the hand shall be seamless knit with a plain (jersey) knit. For Type II construction, the hand shall be seamless knit on a fully automatic flatbed machine with a plain (jersey) knit. The number of needles and total courses shall conform to Tables III and IV and testing shall be visual: pass or fail.

3.5.3 Thumb. For Type I construction, the thumb shall be seamless knit with a plain (jersey) knit. The thumb shall be joined to the hand with the center of the thumb in line with the plane of the hand and the fingers so that each glove insert may be worn on either the right or left hand. The thumb shall be knitted ten (10) courses, narrowed four (4) needles (one on each side of thumb both front and back) and then knit straight to the specified length. The tip of thumb shall be drawn together and closed over a form with a rounded end so as to insure a well-shaped conical tip. The same yarn as used for knitting the thumb shall be used to close the tip of the thumb. As an alternate, the tips shall be stitched on the inside using polyester thread (see 3.3) to form a curve (see 3.3.1) as shown on Figure 1. For Type II construction, the thumb shall be seamless knit with a plain (jersey) knit. It shall be automatically closed and knitted with the same yarn used for the hand.

3.5.4 Fingers. For Type I construction, the fingers shall be seamless knit with a plain (jersey) knit. Each fingertip shall be drawn together and closed over a form with a rounded end so as to insure well shaped conical fingertips. The yarn used for knitting the fingers shall also be used to close the fingertips. As an alternate, the tips shall be stitched on the inside using polyester thread (see 3.3) to form a curve (see 3.3.1) as shown on Figure 1. For Type II construction, the fingers shall seamless knit with a plain (jersey) knit. They shall be automatically closed and knitted with the same yarn as that is used for the hand. The number of needles and total number of courses shall conform to Tables III and IV and testing shall be visual: pass or fail.

3.6 Finishing. The glove inserts shall be scoured and fulled. After fulling, the inserts shall be brushed on the inside and formed to proper size. The fulling and brushing characteristics of the gloves shall be equal to or better than those of the standard sample. The loose ends of yarn shall be trimmed to within 1/4 to 1/2-inch of surface of knitted fabric.

3.7 Sizes and finished measurements. The finished glove inserts shall conform to the sizes and measurements specified in Table III and IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

TABLE III. Finished Measurements (Type I).

Glove areas	Measurements (See Figure 1)	Size					Tolerance (±)
		X-Small	Small	Medium	Large	X-Large	
Machine cylinder for knitting cuff and hand (inches)	---	3 1/4 – 3 3/4	3 1/4 – 3 3/4	3 3/4 – 4 1/4	3 3/4 – 4 1/4	4 - 5	---
Cuff:							
No. of needles	---	52 – 56	56 – 60	60 – 64	64 – 68	68 – 72	---
Length (in.)	M	4	4	4	4	4	1/4
Total courses	M	44 – 48	44 – 48	44 – 48	44 – 48	44 – 48	---
Width (in.) (center)	N	2 3/4	3 1/8	3 1/2	3 7/8	4 1/4	1/4
Hand:							
No. of needles	---	52 – 56	56 – 60	60 – 64	64 – 68	68 – 72	---
Total courses	S	44 – 48	47 - 51	50 – 54	53 – 57	56 – 60	---
Width (in.)	R	3	3 3/8	3 3/4	4 1/8	4 1/2	3/16
Thumb:							
No. of needles at base	---	24	26	28	30	32	---
Courses to narrow of thumb	---	10	10	10	10	10	---
No. of needles after narrowing	---	20	22	24	26	28	---
Total courses	A	31 – 33	33 – 35	35 – 37	37 – 39	39 – 41	---
Length (in.)	A	2 5/16	2 1/2	2 11/16	2 7/8	3 1/8	1/8
Width (in.) (1-1/2 inches from tip)	B	1 1/8	1 1/4	1 3/8	1 1/2	1 5/8	1/8
Location (courses from cuff)	L	18 - 20	20-22	22 - 24	24 - 26	26 - 18	---
First finger:							
No. of needles	---	18 – 19	19 – 20	20 – 21	21 – 22	22 – 23	---
Total courses	C	28 - 30	30 - 32	32 - 34	34 - 36	36 - 38	---
Length (in.)	C	2 5/16	2 1/2	2 11/16	2 7/8	3 1/8	1/8
Width (in.) (middle of finger)	D	1	1 1/16	1 1/8	1 1/4	1 3/8	1/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

TABLE III. Finished Measurements (Type I). – Continued

Glove areas	Measurements (See Figure 1)	Size					Tolerance (±)
		X-Small	Small	Medium	Large	X-Large	
Second finger:							
No. of needles	---	18 – 19	19 – 20	20 – 21	21 – 22	22 – 23	---
Total courses	E	33 - 35	35 - 37	37 - 39	39 - 41	41 - 43	---
Length (in.)	E	2 5/8	2 7/8	3 1/8	3 3/8	3 5/8	1/8
Width (in.) (middle of finger)	F	1	1 1/16	1 1/8	1 1/4	1 3/8	1/8
Third finger:							
No. of needles	---	18 – 19	19 – 20	20 – 21	21 – 22	22 – 23	---
Total courses	G	30 - 32	32 - 34	34 - 46	36 - 38	38 - 40	---
Length (in.)	G	2 1/2	2 11/16	2 7/8	3 1/16	3 1/4	1/8
Width (in.) (middle of finger)	H	1	1 1/16	1 1/8	1 1/4	1 3/8	1/8
Fourth finger:							
No. of needles	---	16 – 17	17 – 18	18 – 19	19– 20	20 – 21	---
Total courses	J	20 - 22	22 - 24	24 - 26	26 - 28	28 - 30	---
Length (in.)	J	1 3/4	1 7/8	2 1/16	2 1/4	2 3/8	1/8
Width (in.) (middle of finger)	K	7/8	15/16	1	1 1/16	1 1/8	1/8
Length of hand and fingers	O	6 3/4	71/8	7 1/2	8	8 1/4	1/4
Overall length (in.)	P	10 3/4	11 1/8	11 1/2	12	12 1/4	1/2
Weight per dozen pairs (oz.) (min.)	---	19	20	24	25	26	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

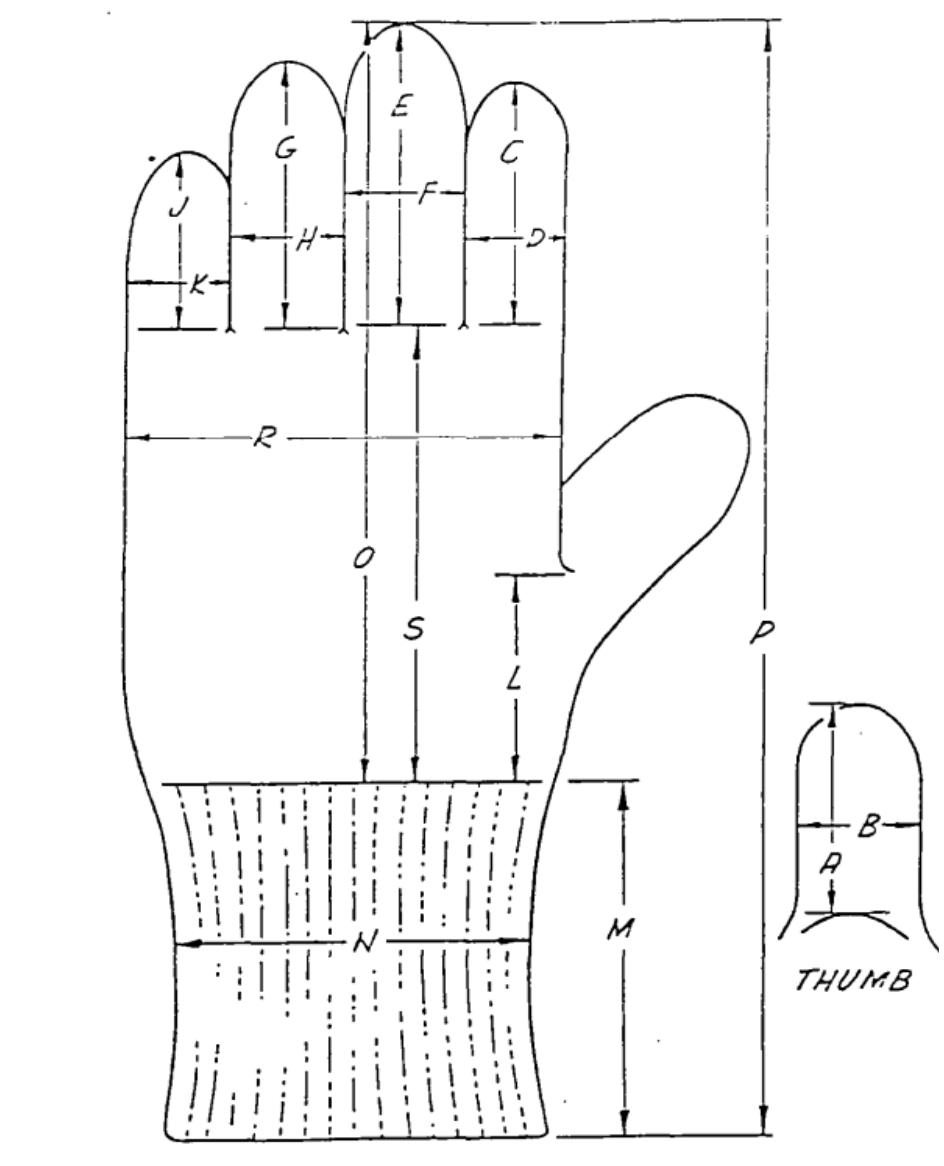


FIGURE 1. Glove, Inserts, Cold Weather (Type I - Construction).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

TABLE IV. Finished Measurements (Type II).

Glove areas	Measurements (See Figure 2)	Size					Tolerance (±)
		X-Small	Small	Medium	Large	X-Large	
Cuff (Mock rib):							
No. of needles	---	74	74	84	84	92	---
Total courses (min.)	M	44	44	48	48	48	---
Length (in.)	M	4	4	4	4	4	1/4
Width (in.) (center)	N	3	3	3 1/4	3 1/4	3 1/2	1/4
Base of thumb to fingers:							
No. of needles	---	58	58	66	66	74	---
Total courses (min.)	T	20	20	28	28	30	---
Length (in.)	T	1 1/2	1 3/4	2	2 1/4	2 1/2	1/8
Width (in.) (center)	R	3 1/2	3 1/2	3 3/4	3 3/4	4	1/4
Cuff to base of thumb:							
No. of needles	---	74	74	84	84	92	---
Total courses (min.)	L	20	20	26	26	28	---
Width (in.) (measured one (1) inch above mock rib)	S	4 1/4	4 1/4	4 1/2	4 1/2	4 3/4	1/4
Thumb:							
No. of needles	---	20	20	22	22	24	---
Total courses (min.)	A	30	32	32	36	40	---
Length (in.)	A	2 3/8	2 1/2	2 5/8	2 7/8	3 1/8	1/8
Width (in.)	B	1	1 1/16	1 1/8	1 1/4	13/8	1/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

TABLE IV. Finished Measurements (Type II). – Continued

Glove areas	Measurements (See Figure 2)	Size					Tolerance (±)
		X-Small	Small	Medium	Large	X-Large	
First finger:							
No. of needles	---	18	18	20	20	22	---
Total courses (min.)	C	30	32	32	36	40	---
Length (in.)	C	2 1/4	2 3/8	2 1/2	2 7/8	3 1/8	1/8
Width (in.)	D	1	1 1/16	1 1/8	1 1/8	1 3/8	1/8
Second finger:							
No. of needles	---	18	18	20	20	22	---
Total courses (min.)	E	36	38	38	42	46	---
Length (in.)	E	2 7/8	3	3 1/8	3 1/2	3 5/8	1/8
Width (in.)	F	1	1 1/16	1 1/8	1 3/16	1 3/8	1/8
Third finger:							
No. of needles	---	18	18	20	20	22	---
Total courses (min.)	G	32	34	34	38	42	---
Length (in.)	G	2 1/2	2 5/8	2 3/4	3 1/16	3 1/4	1/8
Width (in.)	H	1	1 1/16	1 1/8	1 3/16	1 3/8	1/8
Fourth finger:							
No. of needles	---	16	16	18	18	20	---
Total courses (min.)	J	24	26	26	30	34	---
Length (in.)	J	1 7/8	2	2 1/8	2 3/8	2 1/2	1/8
Width (in.)	K	7/8	15/16	1	1 1/16	1 1/8	1/8
Length of hand and fingers	O	6 1/4	6 3/4	7	7 1/2	8	1/4
Overall length (in.)	P	10 1/4	10 3/4	11	11 1/2	12	1/2
Weight per dozen pairs (ozs.) (min.)	---	18	19	21	22	25	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

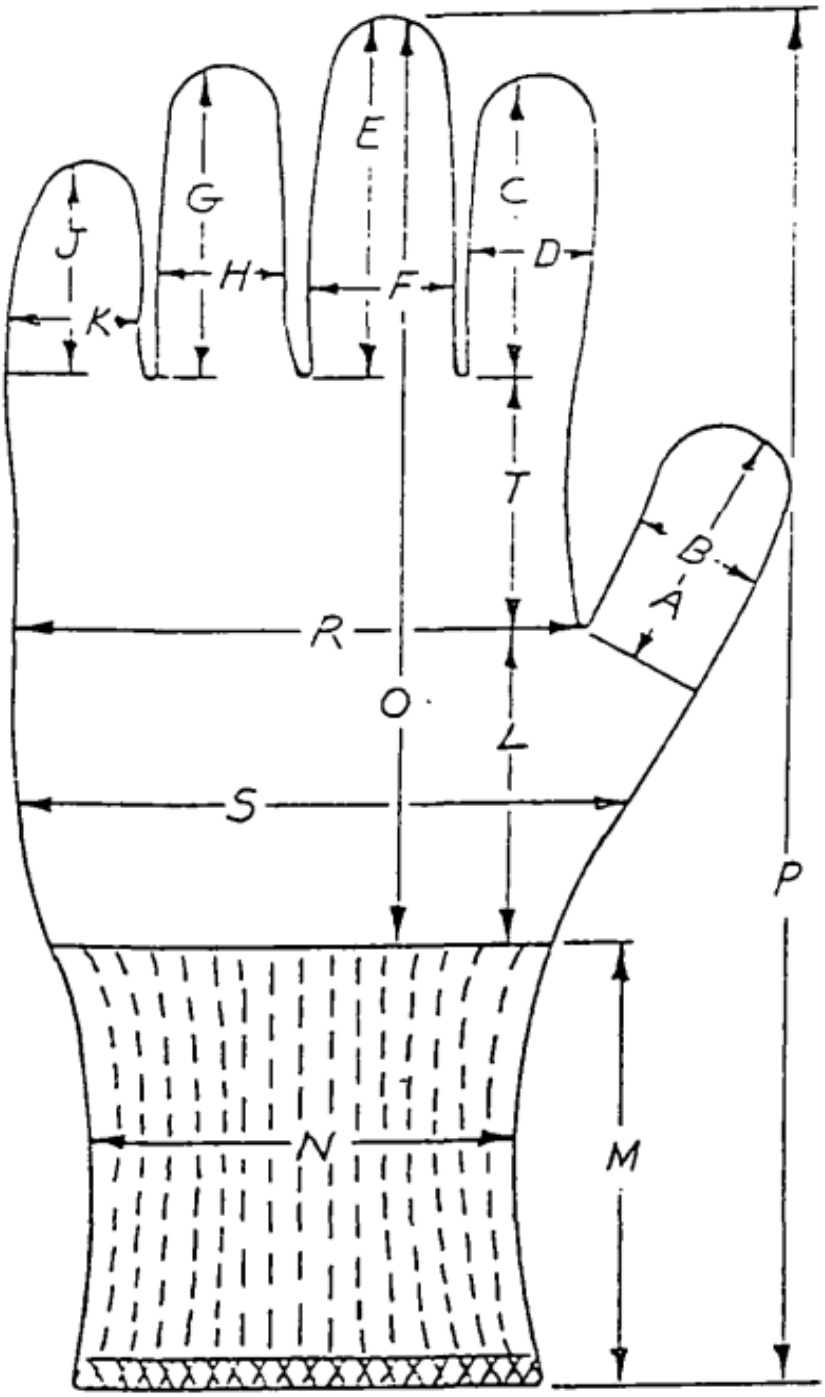


FIGURE 2. Glove, Inserts, Cold Weather (Type II - Construction).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

3.8 Pairing. The finished glove inserts shall be paired according to size and class. They shall not be tacked.

3.9 Toxicity. Unless otherwise specified in the contract or procurement documents, the finished glove insert shall not present a health hazard and shall show compatibility with prolonged, direct skin contact when tested as specified in 3.9.1.

3.9.1 Toxicity test. When the toxicity requirement (see 3.9) can be demonstrated with historical use data, on the finishing treatments used, toxicity testing may not be required (see 7.1.4 and 7.5).

3.11 Workmanship. The finished glove inserts shall conform to the quality of the product established in this document. The glove inserts shall be free from defects which would affect its serviceability, appearance, uniformity and quality assurance standards defined by the technical data in the procurement documents.

4. REGULATORY REQUIREMENTS. Unless otherwise specified, the offeror/contractor is encouraged to use recovered, recycled, bio based, and environmentally preferable materials to the maximum extent practicable, in accordance with paragraph 23.403, 23.404(b) of the Federal Acquisition Regulation FAR, or the sustainable acquisition of EO 13693; as applicable (see 7.1 2).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The glove inserts shall meet the salient characteristics of this Commercial Item Description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

5.2 Market acceptability. The finished glove inserts offered must have been sold to the government or commercial market.

5.3 End item inspection procedures. Sampling for inspection shall be conducted in accordance with ASQ/ANSI Z1.4 - Sampling Procedures and Tables for Inspection of Attributes (see 7.2.2).

5.4 Visual examination. Each finished glove insert shall be examined for the defects listed in Table V as defined in ASTM D3990. The lot size shall be expressed in units of glove inserts. The sample unit shall be one (1) glove insert.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

TABLE V. Visual examination defects.

Material defects: Any hole, cut, tear, slub, loose or floated end, permanent fold, pleat, or crease; any spot or stain, discoloration or color not as specified, shaded parts area of no dye penetration. Foreign matter, thin area in knit fabric, any serious material defects or objectionable odor.
Stitches, seams and stitching: Loose or tight stitching tension, broken or skipped stitches, needle chew, mend, any part caught in an unrelated operation or stitching, raw edge, thread ends not removed, any seam slippage, re-stitching, pleating or puckering; distorted, open, pulled or snagged stitches, twisted, ragged or inconsistent edge. Dropped stitch, opening in any crotch,
Workmanship: Any component part omitted, twisted, not specified size, missing, misplaced or distorted parts; poorly shaped, cuff edge ravelled, cut or frayed any dimension of item not as specified; design not as specified. Failure to meet product conformance; serviceability, reliability and quality of materials as defined by this document.
Labels: Label(s) missing or separating from glove insert, incorrect, or illegible; bar code or UPC code label omitted or not readable by scanner; human- readable interpretation (HRI) omitted or illegible,; bar code not visible on folded packaged item, bar code label causes damage to the item.
Packaging: Not packaged in accordance with the contract or procurement documents.

5.5 Dimensional examination. The finished glove inserts shall conform to the dimensions specified in Table III or Table IV when measured as stated. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one (1) glove insert.

5.6 Acceptance criteria. Acceptance criteria shall be as specified in the contract or procurement documents (see 7.6).

6. PACKAGING. The preservation, packing and marking shall be as specified in the contract or procurement documents (see 7.6).

7. NOTES.

7.1 Source of Government documents:

7.1.1 Copies of Government documents are available online at https://quicksearch.dla.mil.

7.1.2 EO 13693 information is available online at https://www.epa.gov.

7.1.3 Federal Acquisition Regulations (FAR) are available online at https://acquisition.gov.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

7.1.4 Toxicity testing. If dermal toxicity testing is required, it will be conducted using Title 40, Protection of Environment, Code of Federal Regulations current edition and applicable sections, which are also consistent with the following OECD tests:

Skin Sensitization 406 and Dermal Irritation 404 (https://www.oecd-ilibrary.org/environment/oecd-guidelines-for-the-testing-of-chemicals-section-4-health-effects_20745788?page=1).

Dermal Sensitization (https://www.law.cornell.edu/cfr/text/40/798.4100)
Dermal Toxicity (https://www.law.cornell.edu/cfr/text/40/798.2250)

7.2 Source of non-Government documents.

7.2.1 AATCC Test Methods are available for purchase online at https://aatcc.org.

7.2.2 ASQ/ANSI Z1.4 – Sampling Procedures are available online at https://asq.org.

7.2.3 ASTM Standards are available for purchase online at https://www.astm.org.

7.3 Intended use. The item is intended to be used for added warmth with glove shells for cold weather by all Services.

7.4 Standard samples. For access to standard shade samples of cloth, address the contracting activity issuing the invitation for bids or request for proposal.

7.4.1 Visual shade matching. In 2017, Option A of AATCC EP9 was changed to Option C. NOTE: In case of confusion, the viewing geometry should be "The specimen plane and illumination source will be parallel to each other and aligned so that the light flux is incident at the center of the specimen plane, which is set at a 35 (± 5º) angle relative to the horizontal. The observer will view the specimens at a 90º angle, relative to the plane of the specimens".

7.5 Certificate of compliance. The contracting activity may select to accept a certificate of compliance for a stated requirement.

7.6 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this commercial item description
b. Type, class, and size required (see 2.)
c. Color required (see 3.2.3)
d. When toxicity testing is required (see 3.9)
e. Product conformance provisions (see 5.1)
f. Acceptance criteria (see 5.6)
g. Packaging requirements (see 6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

7.7 National Stock Number(s) (NSNs). The following is a list of NSNs assigned that correspond to this CID. This list may not be indicative of all possible NSNs associated with the CID and are provided for reference only.

NSN	Color	Size
8415-01-527-4653	FG 504	X-Small
8415-01-644-6067	Black	X-Small
8415-01-644-6075	Coyote 498	X-Small

7.8 Key words.

Ambidextrous
Cuff
Knitted

MILITARY INTERESTS:

Custodians:
Army – GL
Navy – NU
Air Force – 11

Review Activities:
Army - MD
Navy – AS, CG, MC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FAS

Preparing Activity:
DLA-CT

(Project: 8415-2022-015)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.