INCH-POUND

A-A-55132A
13 December 2019
SUPERSEDING
A-A-55132
10 December 1992

COMMERCIAL ITEM DESCRIPTION

LIGHT, CHEMILUMINESCENT, 6-IN - 30 MIN E, F, G

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers 30 minute 6 inch chemiluminescent lights (commonly known as a light stick or light saber) used for a variety of lighting, marking, and identification purposes.

2. CLASSIFICATION. These chemiluminescent lights shall be of the following colors letter as specified and shall be identified in the Part Identification Number (PIN) paragraph (see 7.2)

Color E = Red
Color F = Yellow
Color G = White

3. SALIENT CHARACTERISTICS.

3.1 Design. The chemiluminescent light shall be elongated having an overall length of 6 inches plus 0.043 inches minus 0.375 inches. The midpoint diameter shall be no less than 0.500 inches and the light stick shall have a flat base on one end. The diameter of the flat end shall not exceed 0.750 inches. The end opposite the flat base shall have a short transverse through hole 0.188 inches nominal. Light sticks shall be individually wrapped in an airtight foil. Light sticks shall have a tapered shape and shall be compatible with items in Table III.

3.1.1 Fluid Level. The total vertical combined fluid level, when measured from the exterior of the flat base shall be no less than 3.250 inches.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: STDZNMGT@dla.mil or Defense Logistics Agency - Aviation ATTN: VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at https://assist.dla.mil.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AMSC NA FSC 6260

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

3.2 Interior. The chemiluminescent lights specified in this CID shall produce a level of light intensity as specified in Table I for a specified length of time (30 minutes). In addition the chromaticity of the emitted light shall meet the requirements in Table II.

TABLE I. Light Intensity vs. Time (Minimum Requirements)

Color		5 min	10 min	15 min	20 min	25 min	30 min
Yellow	75 °F	11.984	11.148	10.219	9.094	8.051	6.742
	32 °F	1.365	1.134	0.978	0.909	0.724	0.692
Red	75 °F	1.900	1.669	1.669	1.420	1.283	1.187
	32 °F	0.445	0.366	0.360	0.360	0.312	0.312
White	75 °F	4.326	3.626	3.040	2.451	2.068	1.659
	32 °F	1.157	0.827	0.696	0.572	0.572	0.572

NOTES:
1. Unit of measure is lumens per square foot.
2. All tests to be conducted at 75°F±2°F and 32°F±2° as applicable.

TABLE II. 1931 CIE Chromaticity Diagram Coordinates

Yellow	X Coordinate	0.4790	0.4910
	Y Coordinate	0.5040	0.5139
Red	X Coordinate	0.6462	0.6681
	Y Coordinate	0.3336	0.3458
White	X Coordinate	0.307	0.331
	Y Coordinate	0.317	0.347

NOTES:
1. 1931 CIE Chromaticity Diagram Coordinates – measured using a colorimeter with a lens measurement area diameter between 0.008 and 0.010 inch. The values in Table II identify the point that represents the shade of color for the Yellow, Red, and White.
2. Coordinate measurements shall meet the following criteria measured 10 minutes after activation at 75.2°F±2°F.

3.3 Testing criteria. Illuminance shall meet or exceed the data presented in Table I. Activated by manually flexing the plastic tube, breaking the inner vial and shaking to combine components. The integrated luminance over 15 minutes starting 5 seconds after activation measured at 75 °F on light sticks a minimum of 30 days after manufacture, but not more than 90 days, shall meet or exceed:

Color E (red): 7.89 foot lambert-hours
Color F (yellow): 32.40 foot lambert-hours
Color G (white): 12.60 foot lambert-hours

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

Plastic tube shall not leak and vial will not break when subjected to an external pressure equivalent to 30,000 feet at 75°F in a vacuum chamber. It shall withstand a free fall; while still in wrapper from a height of 8.5 feet on a hard surface (i.e. concrete) without activating or leakage.

3.3.1 Test conditions.

a. Meter: Photometer with a range of at least 0.1 to 100,000 foot lamberts and less than ± 5% maximum absolute uncertainty. All meters shall be traceable to NIST.
b. Light stick to radiometer probe distance: 1.50 inches ± 0.02 inches.
c. Temperature Stabilization: Light sticks will be placed in a water bath at test temperature 75°F±2°F for a minimum of one (1) hour before activation.
d. Remove light stick from sealed foil wrapper immediately before activation. Light stick shall be handled by cap end during testing
e. Activation method: Bend; agitate for ten (10) seconds.
f. Light sticks shall be agitated for ten (10) seconds before each reading.
g. Light sticks shall be kept under cover or in darkness; may only be exposed to light during movement to and from light meter.
h. All meter readings shall be made in darkness.
i. Temperature tolerances: ± 2°F.
j. Chemiluminescent lights shall be held in a vertical position with cap end down when light output measurement is made. Light stick holder test fixture shall be made of a non-reflective matte finish black material.

3.4 Individual wrapping. Individual light sticks shall be sealed in light blocking foil wrapping. Foil wrapping shall be made of composite material having an aluminum layer with minimum thickness of 0.0007 inches. Foil wrapping shall be color coded and contain operating instructions.

3.5 Foil wrapper leakage. Samples will be tested for foil wrapper leakage by an application of 6 psi air pressure inside of the foil wrap while submerged under water. A steady stream of air bubbles coming from any portion of the foil, except where the foil has been penetrated by the air supply shall be classified as an airtight foil failure.

3.6 Light Blocking Test. Activate the light stick while it is still inside the foil wrapper and observe it in a completely darkened room. Foil wrapper shall not transmit light anywhere through it except the seams.

3.7 Foil wrapping mark. Individual foil wrapping shall be marked with the following information unless otherwise specified:

1. NSN
2. Product Description
3. Manufacturer's Lot number
4. Expiration date

3.8 Shelf life. Each chemiluminescent light shall have a minimum of 46 months life remaining at the time of delivery to the Government and shall have been manufactured within 6 months of the date of delivery to the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The Manufacture or Supplier is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.


5.2 Market acceptability. The products offered shall have been previously sold either to the government or on the commercial market.

6. PACKAGING

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 Part of Identification Number (PIN). The following part or identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

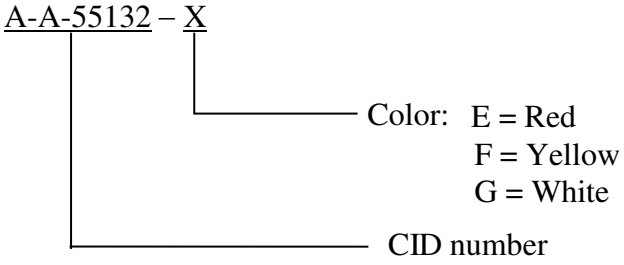

7.2 Ordering data. The acquisition order should specify the following information:

a. CID document number and CID PIN
b. Preservation, packing, and marking (see 6.1)
c. SDS shall be provided to contracting officer prior to award (FAR 52.233-3)

7.3 Light Stick Accessories. Light sticks must have a tapered shape and must be compatible with the accessories item listed in Table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

TABLE III. Light Sticks Accessories

Name	NSN
Light Stick Shield	6260-01-196-0637
Ground Stake	6260-01-230-8555
Flare, Surface Trip	6260-01-247-2937
Handle, six (6) inch	6260-01-255-3345
Magnetic Base	6260-01-255-3346

7.4 Safety Data Sheet. Manufacturer shall provide evidence in the form of a Safety Data Sheet (SDS) (Fed-Std-313) that the components shall not be highly toxic, toxic, corrosive or irritant in terms of the definitions and tests in Code of Federal Regulations, Title 16, Part 1500 (Federal Hazardous Substances Act). Manufacturer shall certify that the chemical components contain no known members of the phthalate family of solvents. None of the components if tested individually will be classified as hazardous as defined by the US Department of Transportation's Hazardous Materials Regulations under 49 CFR 100-179. In particular, none of the individual components will be defined as a flammable liquid under these regulations and determined by ASTM Standard Test Method D56, Flash Point by Tag Closed Cup Tester.

7.5 Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

MILITARY INTERESTS:

Custodians:
Navy – EC
DLA - GS

Review Activity:
Navy – YD

CIVIL AGENCY
COORDINATING ACTIVITY:

GSA – FAS

Preparing activity:
DLA – GS2
6260-2019-002

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.