INCH-POUND

A-A-55134A
16 September 2013
SUPERSEDING
A-A-55134
10 December 1992

COMMERCIAL ITEM DESCRIPTION

LIGHT, CHEMILUMINESCENT, 6 IN – 12 HOUR – B, C, E, F

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers 12 hour 6 inch chemiluminescent lights (commonly known as a light stick) used for a variety of lighting, marking, and identification purposes.

2. CLASSIFICATION. These chemiluminescent lights shall be of the following colors letter as specified and shall be identified in the Part Identification Number (PIN) paragraph (see 7.2)

Color B = Green
Color C = Orange
Color E = Red
Color F = Yellow

3. SALIENT CHARACTERISTICS.

3.1 Design. The chemiluminescent light shall be elongated having an overall length of 152.4mm (6 inches) plus 2.54mm (0.100 inches) minus 9.5mm (0.375 inches.) The midpoint diameter shall be no less than 12.7mm (.500 inches) and the light stick shall have a flat base on one end. The diameter of the flat end shall not exceed 19.1mm (.750 inches). The end opposite the flat base shall have a hole 4.78mm (.188 inches) nominal. Light sticks shall have a tapered shape and shall be compatible with items in TABLE III.

3.1.1 Fluid Level. The vertical fluid level, when measured from the exterior of the flat base shall be no less than 82 mm (3.250 inches.)

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: STDZNMGT@dla.mil or Defense Logistics Agency - Aviation ATTN: VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

3.2 Interior. The chemiluminescent lights specified in this CID shall produce a level of light intensity as specified in Table I for a specified length of time (12 hours). In addition the chromaticity of the emitted light shall meet the requirements in Table II.

TABLE I. Light Intensity vs. Time (Minimum Requirements)

	15 Min	1 Hour	2 Hour	3 Hour	4 Hour	5 Hour	6 Hour	8 Hour	10 Hour	12 Hour
Green	32.93	25.00	20.00	15.00	11.50	8.00	5.00	2.70	1.20	0.60
Yellow	38.00	25.50	20.00	15.50	12.10	9.30	7.20	4.50	2.50	1.50
Red	10.00	6.50	4.80	3.70	3.00	2.50	1.80	1.30	0.70	0.50
Orange	19.00	14.00	10.50	7.60	6.00	4.50	2.75	1.70	0.90	0.40

NOTES:
1. Unit of measure: Lumens per square meter.
2. All tests shall be conducted at 24°C ± 1°C (75.2 ± 2°F)

TABLE II. 1931 CIE Chromaticity Diagram Coordinates

Green	X Coordinate	0.2164	0.2830
	Y Coordinate	0.6536	0.6578
Yellow	X Coordinate	0.4790	0.4910
	Y Coordinate	0.5040	0.5139
Red	X Coordinate	0.6462	0.6681
	Y Coordinate	0.3336	0.3458
Orange	X Coordinate	0.5927	0.6068
	Y Coordinate	0.3784	0.3939

NOTES:
1. 1931 CIE Chromaticity Diagram Coordinates – measured using a Topcon BM-7-232/AL-6 Colorimeter with a close-up lens. The values on Table II identify the point that represents the shade of color for the Green, Yellow, Red, and Orange.
2. Coordinate measurements shall meet the following criteria measured 10 minutes after activation at 24°C ± 1 °C. (75.2 ±2°F)

3.3 Test criteria. Illuminance shall meet or exceed the data presented in Table I. Activated by manually flexing the plastic tube, breaking the inner vial and shaking to combine components. Plastic tube shall not leak and vial will not break when subjected to an external pressure equivalent to 9,144m (30,000 feet) at 24° C (75° F) in a vacuum chamber. It shall withstand a free fall; while still in wrapper from a height of 2.6 meters (8.5 feet) on a hard surface (i.e. concrete) without activating or leakage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

3.3.1 Test conditions.

a. Meter: Radiometer, International Light Model IL1700, Sensor probe SED 033Y filter. All meters shall be traceable to NIST.
b. Light stick to IL1700 probe distance: 22 ±0.5 mm (0.866 ±0.02 inches)
c. Temperature Stabilization: Light sticks will be placed in a water bath at test temperature 24°C ± 1°C (75.2 ± 2°F) for a minimum of one (1) hour before activation.
d. Activation method: Bend; agitate for ten (10) seconds.
e. Light sticks shall be agitated for ten (10) seconds before each reading.
f. Light sticks shall keep under cover or in darkness; may be exposed to light during movement to and from light meter.
g. All meter readings shall made in darkness.
h. Temperature tolerances: plus or minus ±1° C (±2° F.)
i. Chemiluminescent lights shall be held in a vertical position when light output measurement is made. Light stick holder test fixture shall be made of a non-reflective matte finish black material.

3.4 Individual wrapping. Individual light sticks shall be sealed in light blocking foil wrapping. Foil wrapping shall be made of composite material having an aluminum layer with thickness of 0.01778mm (0.0007 inches). Foil wrapping shall be color coded and contain operating instructions.

3.5 Foil wrapper leakage. Samples will be tested for foil wrapper leakage by an application of 41.368 kilopascal (6 psi) air pressure inside of the foil wrap while submerged under water. A steady stream of air bubbles coming from any portion of the foil, except where the foil has been penetrated by the air supply shall be classified as an airtight foil failure.

3.6 Light Blocking Test. Activate the light stick while it is still inside the foil wrapper and observe it in a completely darkened room. Foil wrapper shall not transmit light anywhere through it except the seams.

3.7 Foil wrapping mark. Individual foil wrapping shall be marked with the following information unless otherwise specified:

1. NSN
2. Product Description
3. Manufacturer’s Lot number
4. Expiration date

3.8 Shelf life. Each chemiluminescent light shall have a minimum of 48 months life at the time of manufacture.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The Manufacture or Supplier is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The products offered shall have been previously sold either to the government or on the commercial market.

6. PACKAGING

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 Part of Identification Number (PIN). The following part or identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

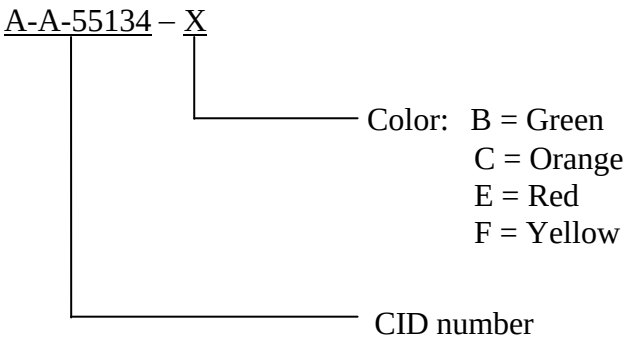

7.2 Ordering data. The acquisition order should specify the following information:

a. CID document number, revision, and CID PIN
b. Color Classification (see 2)
c. Preservation, packing, and marking (see 6.1)
d. MSDS shall be provided to contracting officer prior to award (FAR 52.233-3)

7.3 Light Stick Accessories. Light sticks shall have a tapered shape and shall be compatible with the accessories item listed in Table III.

TABLE III. Light Sticks Accessories

Name	NSN
Light Stick Shield	6260-01-196-0637
Ground Stake	6260-01-230-8555
Flare, Surface Trip	6260-01-247-2937
Handle, six (6) inch	6260-01-255-3345
Magnetic Base	6260-01-255-3346

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

7.4 Material Safety Data Sheet. Manufacturer shall provide evidence in the form of a Material Safety Data Sheet (MSDS) (Fed-Std-313) that the components shall not be highly toxic, toxic, corrosive or irritant in terms of the definitions and tests in Code of Federal Regulations, Title 16, Part 1500 (Federal Hazardous Substances Act). Manufacturer shall certify that the chemical components contain no known members of the phthalate family of solvents. None of the components if tested individually will be classified as hazardous as defined by the US Department of Transportation's Hazardous Materials Regulations under 49 CFR 100-179. In particular, none of the individual components will be defined as a flammable liquid under these regulations and determined by ASTM Standard Test Method D56-05. Flash Point by Tag Closed Tester.

MILITARY INTERESTS:

Custodians:
Navy – EC
Air Force – 99
DLA - GS

Review Activity:
DLA – IS
Navy – YD

CIVIL AGENCY
COORDINATING ACTIVITY:

GSA – FAS

Preparing activity:
DLA – GS2
(Project 6260-2013-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.