INCH-POUND
A-A-55143/2B
w/AMENDMENT 1
1 November 2005
SUPERSEDING
A-A-55143/2A
15 October 2000


COMMERCIAL ITEM DESCRIPTION

# RELAYS, ELECTROMAGNETIC, GENERAL PURPOSE 10 AMPERES, 1-3PDT, AC AND DC COILS, FLANGE MOUNT

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for flange mount 10 ampere relays. Flange mount 10 ampere relays covered by this CID are intended for commercial, industrial, and ground support applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see 7.1).

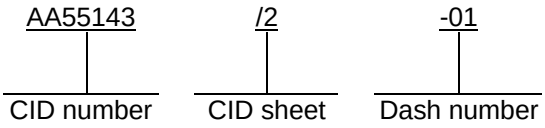



3. SALIENT CHARACTERISTICS.

3.1 Interface and physical dimensions. Flange mount 10 ampere relays supplied to this CID shall be as specified herein (see figure 1 and figure 2).

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to Defense Supply Center, Columbus, ATTN: DSCC-VAT, Post Office Box 3990, Columbus OH 43218-3990, or email to mailto:Relay@dscc.dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at http://assist.daps.dla.mil.

AMSC N/A FSC 5945

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

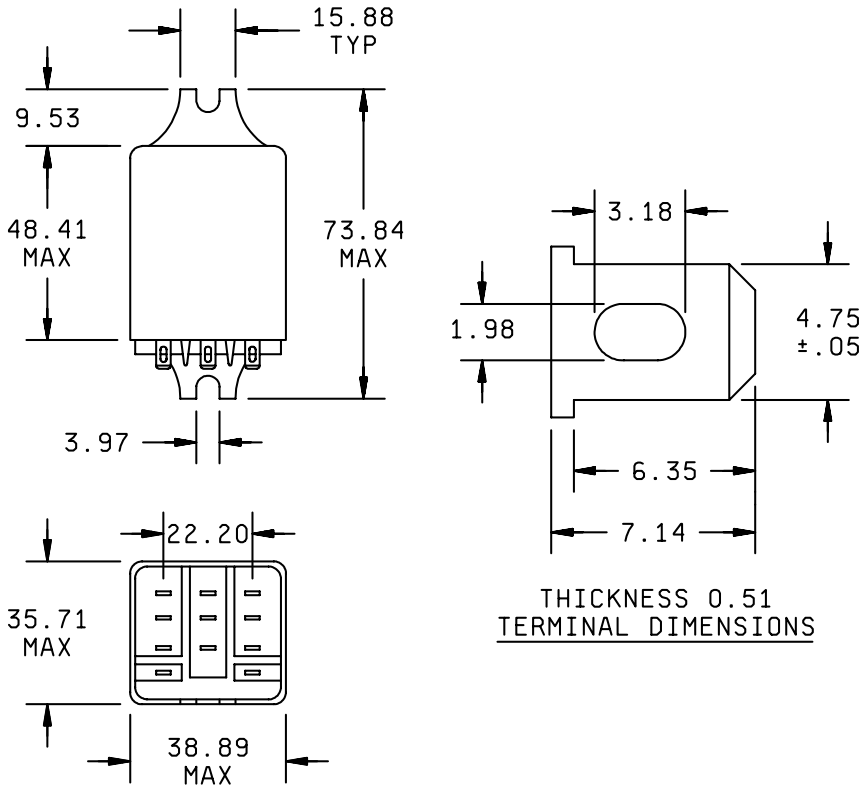


| mm | Inches |
|---|---|
| 0.05 | .002 |
| 0.51 | .020 |
| 1.98 | .078 |
| 3.18 | .125 |
| 3.97 | .156 |
| 4.75 | .187 |
| 6.35 | .250 |
| 7.14 | .281 |
| 9.53 | .375 |
| 15.88 | .625 |
| 22.20 | .874 |
| 35.71 | 1.406 |
| 38.89 | 1.531 |
| 48.41 | 1.906 |
| 73.84 | 2.907 |

NOTES:
1. Dimensions are in millimeters.
2. Tolerance is ±0.25 millimeter (.010 inch).
3. The US government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

FIGURE 1. Dimensions and configurations.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

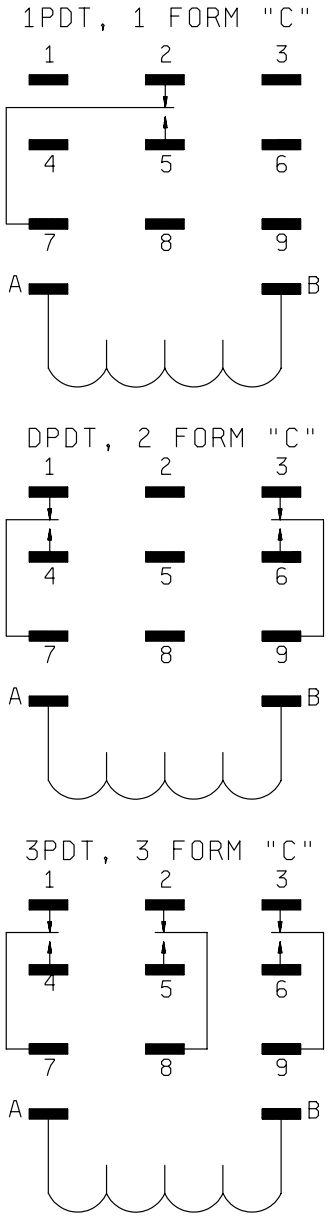



FIGURE 2. Circuit diagrams (terminal view).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

3.2 Contact data.

3.2.1 Contact arrangements. This CID covers relays with 1 form C to 3 form C contacts.

3.2.2 Contact material. The relay contact material shall be Ag alloy or AgCaO.

3.2.3 Contact ratings.

a. 1PDT and 2PDT: 10 amperes at 28 V dc or 240 V ac; 1/3 Hp at 120 V ac; 1/2 Hp at 240 V ac.

b. 3PDT: 10 amperes at 28 V dc or 120 V ac; 6 amperes at 240 V ac.

3.3 Coil data.

3.3.1 Rated coil voltage. See table I.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics.

| Dash number AA55143/2- | Contact config-uration | Coil voltage | | Coil res ohms ±10% |
|---|---|---|---|---|
| | | V ac | V dc | |
| 01 | 1PDT | 6 | | 6 |
| 02 | 1PDT | 12 | | 24 |
| 03 | 1PDT | 24 | | 85 |
| 04 | 1PDT | 48 | | |
| 05 | 1PDT | 120 | | 2250 |
| 06 | 1PDT | 240 | | 9110 |
| 07 | 1PDT | | 6 | 32 |
| 08 | 1PDT | | 12 | 120 |
| 09 | 1PDT | | 24 | 470 |
| 10 | 1PDT | | 48 | 1800 |
| 11 | 1PDT | | 110 | 10000 |
| 12 | 2PDT | 6 | | 6 |
| 13 | 2PDT | 12 | | 24 |
| 14 | 2PDT | 24 | | 85 |
| 15 | 2PDT | 48 | | |
| 16 | 2PDT | 120 | | 2250 |
| 17 | 2PDT | 240 | | 9110 |
| 18 | 2PDT | | 6 | 32 |
| 19 | 2PDT | | 12 | 120 |
| 20 | 2PDT | | 24 | 470 |
| 21 | 2PDT | | 48 | 1800 |
| 22 | 2PDT | | 110 | 10000 |
| 23 | 3PDT | 6 | | 4.2 |
| 24 | 3PDT | 12 | | 18 |
| 25 | 3PDT | 24 | | 72 |
| 26 | 3PDT | 48 | | |
| 27 | 3PDT | 120 | | 1700 |
| 28 | 3PDT | 240 | | 7200 |
| 29 | 3PDT | | 6 | 32 |
| 30 | 3PDT | | 12 | 120 |
| 31 | 3PDT | | 24 | 470 |
| 32 | 3PDT | | 48 | 1800 |
| 33 | 3PDT | | 110 | 10000 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

3.3.2 Rated coil power. The rated coil power shall be 1.2 W (dc), 2 to 2.75 VA (ac).

3.3.3 Operate time. The operate time shall be 25 ms maximum with rated coil voltage.

3.3.4 Release time. The release time shall be 25 ms maximum from rated coil voltage.

3.4 Ambient temperature. The minimum temperature range shall be –30°C to +40°C (ac), -30°C to +65°C (dc).

3.5 Enclosure material. The relay enclosure material shall be clear polycarbonate.

3.6 Weight. The relay weight shall be 100 grams (3.5 ounces) maximum.

3.7 Seal. Nonhermetic.

3.8 Marking. Flange mount 10 ampere relays supplied to this CID shall be marked with the manufacturer's (MFR's) standard commercial PIN.

4. REGULATORY REQUIREMENTS. This section is not applicable to this CID sheet.

5. QUALITY ASSURANCE PROVISIONS. Quality assurance provisions shall be as specified in A-A-55143.

6. PACKAGING. Packaging shall be as specified in A-A-55143.

7. NOTES.

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

7.2 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these socket mount 10 ampere relays to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

7.3 Source of documents.

Commercial Item Description

A-A-55143 - Relays, Electromagnetic, General Purpose General Requirements for.

(Copies of federal specifications and standards are available from the Defense Automation and Production Service, Building 4D (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

7.4 Ordering data. Ordering data shall be as specified in A-A-55143.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

7.5 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

| MFR's CAGE | MFR's name and address |
|---|---|
| 00213 | MSD, Inc.<br>700 Orange Street<br>Darlington, SC 29532-9986<br>(843) 393-5421 |
| 00779 | TYCO Electronics<br>P.O. Box 3608<br>MS-38-77<br>Harrisburg, PA 17105-3608<br>(800) 806-0480 |

7.6 Part number (P/N) supersession data. This CID supersedes the following manufacturer's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

TABLE II. P/N supersession data.

| Dash number (see table I) AA55143/1- | MFR's CAGE | MFR's P/N 1/ | MFR's CAGE | MFR's P/N 1/ |
|---|---|---|---|---|
| 01 | 77342 | | 00213 | A283XAXC1-6A |
| 02 | 77342 | | 00213 | A283XAXC1-12A |
| 03 | 77342 | | 00213 | A283XAXC1-24A |
| 04 | 77342 | | 00213 | A283XAXC1-48A |
| 05 | 77342 | | 00213 | A283XAXC1-120A |
| 06 | 77342 | | 00213 | A283XAXC1-240A |
| 07 | 77342 | | 00213 | A283XAXC1-6D |
| 08 | 77342 | | 00213 | A283XAXC1-12D |
| 09 | 77342 | | 00213 | A283XAXC1-24D |
| 10 | 77342 | | 00213 | A283XAXC1-48D |
| 11 | 77342 | | 00213 | A283XAXC1-110D |
| 12 | 77342 | KUP-11D55-6 | 00213 | A283XBXC1-6A |
| 13 | 77342 | KUP-11D55-12 | 00213 | A283XBXC1-12A |
| 14 | 77342 | KUP-11A55-24 | 00213 | A283XBXC1-24A |
| 15 | 77342 | | 00213 | A283XBXC1-48A |
| 16 | 77342 | KUP-11A55-120 | 00213 | A283XBXC1-120A |
| 17 | 77342 | KUP-11A55-240 | 00213 | A283XBXC1-240A |
| 18 | 77342 | KUP-11D55-6 | 00213 | A283XBXC1-6D |
| 19 | 77342 | KUP-11D55-12 | 00213 | A283XBXC1-12D |
| 20 | 77342 | KUP-11D55-24 | 00213 | A283XBXC1-24D |
| 21 | 77342 | KUP-11D55-48 | 00213 | A283XBXC1-48D |
| 22 | 77342 | KUP-11D55-110 | 00213 | A283XBXC1-110D |
| 23 | 77342 | KUP-14A55-6 | 00213 | A283XCXC1-6A |
| 24 | 77342 | KUP-14A55-12 | 00213 | A283XCXC1-12A |
| 25 | 77342 | KUP-14A55-24 | 00213 | A283XCXC1-24A |
| 26 | 77342 | | 00213 | A283XCXC1-48A |
| 27 | 77342 | KUP-14A55-120 | 00213 | A283XCXC1-120A |
| 28 | 77342 | KUP-14A55-240 | 00213 | A283XCXC1-240A |
| 29 | 77342 | | 00213 | A283XCXC1-6D |
| 30 | 77342 | KUP-14D55-12 | 00213 | A283XCXC1-12D |
| 31 | 77342 | KUP-14D55-24 | 00213 | A283XCXC1-24D |
| 32 | 77342 | KUP-14D55-48 | 00213 | A283XCXC1-48D |
| 33 | 77342 | KUP-14D55-110 | 00213 | A283XCXC1-110D |

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements see the marking paragraph.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

7.7 Government users. To acquire information on obtaining these flange mount 10 ampere relays from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-CDC, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-7884.

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Custodians:
DLA - CC

Preparing Activity:

DLA-CC

Project 5945-2006-006

Note: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.