MILITARY SPECIFICATION

CHAIRS, STACKING, STEEL, NAVAL SHIPBOARD USE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers steel chairs in matching or companion group of uniform appearance, comfort, design, ease of handling, stacking, and stowing and quality of material.

1.2 Classification. Chairs shall be of the following types as specified (see 6.2):

Type I - For messing areas (see figure 1).
Type II - For lounge areas (see figure 2).

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL
FF-R-556 - Rivet, Solid, Small; Rivet, Split, Small; Rivet, Tubular, Small; Burr; and Cap, Rivet; General Purpose.
PPP-B-636 - Boxes, Shipping, Fiberboard.

MILITARY
MIL-P-116 - Preservation, Methods of.
MIL-P-15328 - Primer, (Wash), Pretreatment, Blue (Formula No. 117-B for Metals).

STANDARDS

FEDERAL
FED-STD-141 - Paint, Varnish, Lacquer, and Related Materials; Methods of Inspection, Sampling, and Testing.

MILITARY
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN IRON AND STEEL INSTITUTE (AISI)
Steel Products Manual

(Application for copies should be addressed to the American Iron and Steel Institute, 150 East, Forty-Second Street, New York, N.Y. 10017.)

AMERICAN NATIONAL STANDARD INSTITUTE, INC. (ANSI)
Y32.3-69 - Welding, Graphic Symbol.

(Application for copies should be addressed to the American National Standard Institute, Inc., 1430 Broadway, New York, N.Y. 10018.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:13Z
Check the source to verify that this is the current version before use.

NATIONAL CLASSIFICATION BOARD
National Motor Freight Classification Rules

(Application for copies should be addressed to the National Motor Freight Traffic Association, Inc., 1616 P St., N.W., Washington, D.C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, 222 South Riverside Plaza, Room 1105, Chicago, Illinois 60606.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)
D635-72 - Flammability of Self-Supporting Plastics.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Sample for first article inspection. Unless otherwise specified (see 6.2) prior to beginning production a sample shall be examined and tested as specified in 4.3 (see 6.3).

3.2 Materials. Materials and finish shall be in accordance with requirements specified herein. The use of commercial equivalent material is acceptable. Any type material not definitely specified shall be the best of its kind used in the manufacture of high quality chairs. All material shall be new and free of defects.

3.2.1 Rods and bars. Rods and bars shall be in accordance with AISI 1035 steel.

3.2.2 Sheet steel. Sheets shall be commercial quality, cold rolled, low carbon, in accordance with AISI 1008 or 1010.

3.2.3 Fastening devices. Rivets shall be type X, grade C of FF-R-556.

3.3 Construction.

3.3.1 Design. The structural design of the chairs shall be such that any sustained and impact weight will be uniformly distributed on all supporting parts with no excessive strain on any one or pair of supporting parts under normal usage.

3.3.2 Chairs shall be straight, armless, stacking, general purpose, nylon-coated steel rod construction with sheet steel seat and back having a baked-on vinyl surface for long wear and resistance to corrosion.

3.3.3 Frame. The chairs frame shall be fabricated from 7/16 inch steel rod. The back panel support, rear leg, floor rail, front leg and side seat rail shall be formed from a single 7/16 inch diameter rod. The rear seat rail shall be 3/8 inch rod and shall follow the contour of the rear edge of the seat panel, securely attached to the rear leg where it will be joined to the side seat rail. A front cross member shall be 3/8 inch diameter rod and is to be securely attached to the front legs. The rear legs may be strengthened by integral stiffening members to prevent lateral sway.

3.3.4 Seat and back panels. Both units are to be cut stamped or die formed and contoured to fit the body's form. Contour should provide maximum comfort for either tall or short persons for extended periods of time. Panels shall have at least 3/16 inch beaded rim edge for safe handling, re-inforcement and improved appearance.

3.3.4.1 Seat. The seat shall be of 24 gauge (0.0239 inch) steel so shaped as to provide even distribution of weight. The front of the seat shall be reinforced by a pan constructed of 20 gauge steel, having steel angle clips for attachment of seat to frame at front. The seat pan shall also be attached to the seat rail at the rear with three recessed head rivets. The seat and its reinforcement, prior to specified finish, shall be zinc coated, as well as being phosphated for protection against salt water atmosphere.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T22:13Z
Check the source to verify that this is the current version before use.

3.3.4.2 Back. The back pan shall be 20 gauge (0.0359 inch) so shaped to provide the proper angle and support for the back of the user. The back pan shall be riveted to the back posts of the frame by means of recessed rivets. The pan prior to specified finish shall be zinc coated, as well as being phosphated for protection against salt water atmosphere.

3.3.5 Glides. The four glides shall be made of 7/16 inch + 1/16 inch flat bar 304 stainless steel alloy rod, welded to frame with compatible stainless steel filler metal. They shall prevent marring vinyl and similar deck surfaces beside preventing undue slipping and sliding. They shall not exceed 1-1/2 inches in length and two shall be provided on each base rail.

3.4 Weight. The complete chair shall not exceed 14.7 pounds in weight.

3.5 Colors. Colors shall be as specified (see 6.2).

3.6 Finishes.

3.6.1 Frame. The frame shall be coated with nylon, resistant to scratching and marring. The color of the nylon shall be white and shall be applied by the fluid bed process or other acceptable commercial process. The nylon shall be free of runs, dirt and voids, and to be a smooth continuous coating. The coating thickness shall be a minimum of 0.008 inch with a medium gloss finish. The nylon finish shall meet the tests specified in 4.6.1.1, 4.6.2.1, 4.6.3.1 and 4.6.4 as a minimum.

3.6.1.1 Salt spray. The nylon coated frame shall be tested for salt spray resistance in accordance with 4.6.1.1.

3.6.1.2 Abrasion. The nylon coated frame shall be tested for abrasion resistance in accordance with 4.6.2.1.

3.6.1.3 Flammability. The nylon coated frame shall be tested for flammability in accordance with 4.6.4.

3.6.1.4 Impact. The nylon coated frame shall be impact tested in accordance with 4.6.3.1.

3.6.2 Seat and back. The surface of the seat and back shall have a matte surface of baked-on textured vinyl, highly durable in nature percent to resist abrasions and cigarette burns. They shall be easily washed with ordinary detergents. The finish shall not be marred after 24 hour submersion in either water, detergent or a 5 percent hydrochloric solution. The vinyl finish is to be free of runs, blistering and dirt. The finish coat shall be a low or medium gloss, applied to a dry film thickness of 0.0035 minimum. The finish shall meet the tests specified in 4.6.1.2, 4.6.2.2, 4.6.3.2, 4.6.5 and 4.6.6 as a minimum.

3.6.2.1 Salt spray. The vinyl coated seat and back shall be tested for salt spray resistance in accordance with 4.6.1.2.

3.6.2.2 Abrasion. The vinyl coated seat and back shall be tested for abrasion resistance in accordance with 4.6.2.2.

3.6.2.3 Adhesion. The vinyl coated seat and back shall be tested for adhesion in accordance with 4.6.5.

3.6.2.4 Color fading. The vinyl coated seat and back shall be tested for color fading in accordance with 4.6.6.

3.6.2.5 Impact. The vinyl coated seat and back shall be impact tested in accordance with 4.6.2.2

3.6.3 Glides. Glides shall be finished with the same nylon coating as the frame. Glides shall be welded to the frame prior to the application of the nylon coating (see 3.3.5).

3.7 Static load. The chair shall be capable of passing the static load test as specified in 4.6.7.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T22:13Z
Check the source to verify that this is the current version before use.

3.8 Stacking. The chair shall be capable of stacking as specified in 4.6.9.

3.9 Welding and brazing. All welding and brazing shall accomplish rigid joints in proper alinement. Welds shall be sound, without porosity and shall provide rigid one piece units of necessary strength to meet the tests specified in 4.6.8, without any parts working loose or affecting the use of the chairs; in addition to withstand rough handling while stacking. Welds shall be free of spatter, burrs and sharp edges. Welding shall be in accordance with processes listed in ANSI Y32.3-69.

3.10 Assembly of metal parts. The assembly of metal parts shall be by welding or brazing as specified herein for maximum strength at each joint. Jigs shall be used to insure proper alinement of parts during welding or brazing operation. Where necessary, mechanical joints shall be made with steel rivets.

3.10.1 Bending of rod. The rod when bent in accordance with 3.6.1 shall have true and even curves without flattening, crushing or crimping that will affect the appearance or strength of the rod.

3.10.2 Welded or brazed parts. Parts brazed or welded with process employing fluxes shall have all traces of flux removed before plating. For inaccessible welds, both sides of the rods and sheets shall be thoroughly cleaned. There shall be no trace of acid resulting from the residual flux. The parts shall be tested in accordance with 4.6.8.

3.10.3 Blemishes. All traces of mill scale, rust, oil and moisture shall be removed before any plating procedures are begun. Blemishes sufficient to cause rejection of the finish may result from failure to remove small amounts of oil or acids lodged between mating surfaces.

3.10.4 Priming. Priming shall be applied to all mating surfaces and parts which will be inaccessible after assembly.

3.10.5 Surface preparation. After all welding and fabrication the frame with glides, and the seat and back shall be cleaned and iron phosphate coated. The iron phosphate coating shall be 30 milligrams minimum per square foot of surface. All oils and soils are to be removed. The items are to be processed through a 6-stage cleaning and phosphating process as follows:

(a) 1st stage - Cleaned in a hot mild alkaline cleaner - a combination of spray and immersion 140° - 180°F.
(b) 2nd stage - Rinsed by spray and immersion.
(c) 3rd stage - Rinsed by spray and immersion.
(d) 4th stage - Iron phosphate solution - spray at 140° - 160°F temperature.
(e) 5th stage - Rinse - spray.
(f) 6th stage - Rinse - spray, hot 140° - 180°F.
(g) Hot air dry off.

The seat and back shall be given a coat of wash primer which shall be applied conforming to MIL-P-15328. The minimum thickness shall be 0.0002 inch, baked at 250° - 300°F for 10 minutes. A vinyl primer shall then be applied to produce a dry film thickness of 0.0005 inch minimum baked at a temperature of 300° - 350°F for 10 to 15 minutes prior to the application of the final vinyl coating. The frame shall be primed with a prime coat for use with the nylon finish. The minimum primer thickness shall be 0.0002 inch dry film.

3.11 Markings. Each chair shall be provided with a decal secured to the underside of the seat, reflecting the following information:
Type I - Messing or
Type II - Lounge.
Manufacturer's name and location.
Government contract number.
Date of manufacture (month and year).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 20260-19T22:13Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

(a) First article inspection (see 4.3).
(b) Quality conformance inspection (see 4.4.3).

4.3 First article inspection. First article inspection shall consist of the examination of 4.5 and tests specified in 4.6.1 through 4.6.8.

4.4 Sampling for quality conformance inspection.

4.4.1 Lot. All chairs presented for delivery at one time shall be considered a lot.

4.4.2 Sampling for examination. A random sample of chairs shall be selected from each lot in accordance with tables I and II for the examination specified in 4.5.

Table I - Sampling for examination for major defects.

Number of chairs in lot	Number of chairs in the sample	Acceptance number (defective)	Rejection number (defective)
1 to 8	1/ 3	0	1
9 to 25	5	0	1
26 to 40	7	0	1
41 to 65	10	0	1
66 to 110	15	1	2
111 to 300	25	1	2
301 to 500	35	2	3
501 to 800	50	3	4
801 to 1300	75	4	5
1301 and over	110	6	7

1/ If less than 3, examine chair purchased.

Table II - Sampling for examination for minor defects.

Number of chairs in lot	Number of chairs in the sample	Acceptance number (defective)	Rejection number (defective)
1 to 8	4	0	1
9 to 25	5	0	1
26 to 40	7	0	1
41 to 65	10	1	2
66 to 110	15	1	2
111 to 300	25	2	3
301 to 500	35	3	4
501 to 800	50	4	5
801 to 1300	75	6	7
1301 and over	110	8	9

4.4.3 Quality conformance inspection. Quality conformance inspection shall consist of the examination specified in 4.5 and test specified in 4.6.7, 4.6.8 and 4.6.9.

4.5 Examination. Each of the sample chairs selected in accordance with 4.4.2 shall be visually and dimensionally examined to verify compliance with the requirements of this specification. Classification of defects shall be conducted as specified in table III. Any chair in the sample containing one or more visual or dimensional defects shall not be offered for delivery, and if the number of defective chairs in any sample exceeds the acceptance number for that sample, this shall be cause for rejection of the lot represented by the sample.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:13Z
Check the source to verify that this is the current version before use.

Table III - Classification of defects.

Categories	Defects
Critical	None
Major	
101	Noncompliance with dimensions, one or more, indicated on figures 1 or 2.
102	Inability to stack 40 chairs in 54 inches on dolly.
103	Frame not properly assembled and secured.
104	Seat or back not properly formed and secured.
105	Chair is not solid, sways or wobbles.
106	Chair does not return to design dimensions and configuration after testing.
107	Welds, rivets or other attachments fail during testing.
108	Glides missing or loose.
109	Glides improperly installed.
110	Glides not type or material specified.
111	Nylon finish on frame applied poorly, blisters, peels, bar wrinkles, or not of a uniform appearance.
112	Any rusted parts (not spots).
113	Vinyl finish applied to seat and back. Applied poorly, has wrinkles, or not of a uniform appearance, any crack in matte finish, wrong color.
114	Materials not as specified.
115	Any part malformed, damaged, dented scratches through to base metal, warped.
116	Welding missing, not smooth or properly fused, burn through, cracked, fractured, pitted, holes, fissures or incomplete flux.
117	Labeling missing or with incorrect data.
118	Failing to pass static load test.
Minor	
201	Finish discolored affecting appearance.
202	Bare or rust spots.
203	Area of thin coating.
204	Parts misaligned.
205	Weld flash or splatter.
206	Labeling not properly attached.

4.6 Tests.

4.6.1 Salt spray test.

4.6.1.1 Frame. The frame shall pass a 5 percent salt spray for 1500 hours using an unscored panel in accordance with FED-STD-141, method 6061.

4.6.1.2 Seat and back. The seat and back shall pass a 5 percent salt spray for 100 hours in accordance with FED-STD-141, method 6061 on unscored panels.

4.6.2 Abrasion resistance test.

4.6.2.1 Frame. The frame shall possess a wear index of 15 milligrams maximum measured in accordance with FED-STD-141, method 6192 using CS-10 wheels and a 1000 gram weight with a Tabor abrasion resistance tester.

4.6.2.2 Seat and back. The seat and back shall possess a wear index of 50 milligrams maximum measured in accordance with FED-STD-141, method 6192, using CS-10 wheels and 1000 gram load with a Tabor abrasion resistance tester.

4.6.3 Impact test.

4.6.3.1 Frame. The frame shall withstand 140 inch pounds direct impact using the Gardner Variable Drop test and a 5/8 inch diameter weight.

4.6.3.2 Seat and back. The seat and back shall withstand 80 inch pounds direct impact with no fracturing or flaking at room temperature using a Gardner Variable impact tester and a 5/8 inch diameter weight.

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:13Z
Check the source to verify that this is the current version before use.

4.6.4 Flammability test (frame). The nylon shall be self extinguishing when tested in accordance with ASTM D635-72.

4.6.5 Adhesion test (seat and back). The seat and back shall show no signs of brittleness or ease of removal as tested in accordance with FED-STD-141, method 6304.

4.6.6 Color test (seat and back). The seat and back shall pass 100 hours in Atlas Twin Arc Fadeometer with less than 1.5 MacAdams units of color change.

4.6.7 Static load test (chair). The chair when in use shall not collapse or be permanently distorted by the weight of the user (at least 250 pounds) when it is tilted 30 degrees to one side and user's weight remaining thereon.

4.6.8 Welded or brazed parts. The tests shall be made by using distilled water and a 5 percent silver nitrate. A white precipitate will indicate presence of flux, which is to be washed until a recheck indicates no trace of acid.

4.6.9 Stacking test (chair) (quality conformance inspection only). Chairs shall be capable of stacking one into the other, in an orderly fashion to a height not exceeding 54 inches on proper stacking dolly and containing at least 40 chairs. The stack shall be capable of being secured by means of a flat strap to a forklift platform (flat) or a dolly designed for the purpose.

4.7 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing and marking as required by section 5 are complied with. Defects shall be scored in accordance with table IV. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. The lot size shall be the number of containers in the end item inspection lot.

Table IV - Examination of preparation for delivery.

Examination	Defects
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component damaged, affecting serviceability; any component missing.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, inadequate stapling, loose strapping, improper or loose taping; bulging or distortion of containers.

5. PREPARATION FOR DELIVERY

5.1 Preservation - packaging. Preservation - packaging shall be level A or C, as specified (see 6.2). Quantity per unit pack shall be ten stacked chairs as specified (see 6.2), and packed in containers for the level of packing required.

5.1.1 Level A. Chairs shall be cleaned, dried and unit protected to meet the requirements of MIL-P-116, method III. Chairs shall be padded or cushioned at all major points of contact with the container. When stacked, chairs shall be placed one upon the other, each in the same position and provided with cushioned pads which shall be placed on the bottom and top chairs and between each chair.

5.1.2 Level C. Chairs shall be protected to afford protection against damage during shipment from the supply source to the first receiving activity for immediate use.

5.2 Packing. Packing shall be levels A, B or C, as specified (see 6.2).

5.2.1 Level A. Chairs in the quantity and packaged as specified (see 6.2), shall be packed in a fiberboard box conforming to type CF, class - weather resistant of PPP-B-636. Variety, grade and style of box shall be at the supplier's option. Box closure, waterproofing and reinforcement shall be as specified for method V in accordance with the appendix in the box specification.

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:13Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Chairs in the quantity and packaged as specified (see 6.2), sh packed in a fiberboard box conforming to type CF, class-domestic of PPP-B-636. Vari grade and style of box shall be at the supplier's option. Box closure shall be as s for method I in accordance with the appendix to the box specification.

5.2.3 Level C. Chairs in the quantity and packaged as specified (see 6.2), sl packed in containers acceptable to the common carrier and which will insure safe de at destination in a satisfactory condition at the lowest applicable rate. Containe packing or method of shipment shall comply with Uniform Freight and National Motor Classification Rules and Regulations or other carrier rules as applicable to the mo transportation.

5.3 Marking. In addition to any special marking required by the contract or (see 6.2), shipment markings shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Type I chairs are intended for use in messing areas, type are intended for use in lounge areas. Both types are protected against corrosion suitable for shipboard service.


6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Type required (see 1.2).
(c) Whether first article sample is required (see 3.1).
(d) Color of chair required (see 3.5).
(e) Number of chairs to be packaged in one carton (see 5.1).
(f) Level of packaging and packing required (see 5.1 and 5.2).
(g) If special marking is required (see 5.3).

6.3 First article inspection. Invitations for bids should provide that the reserves the right to waive the requirements for samples for first article inspec those bidders offering a product which has been previously procured or tested by ment, and that bidders offering such products, who wish to rely on such productic must furnish evidence with the bid that prior Government approval is presently ap for the pending procurement.

Preparing activi
Navy - SH
(Project 20


Source: https://assist.dla.mil -- Downloaded: 202610-19T22:13Z
Check the source to verify that this is the current version before use.

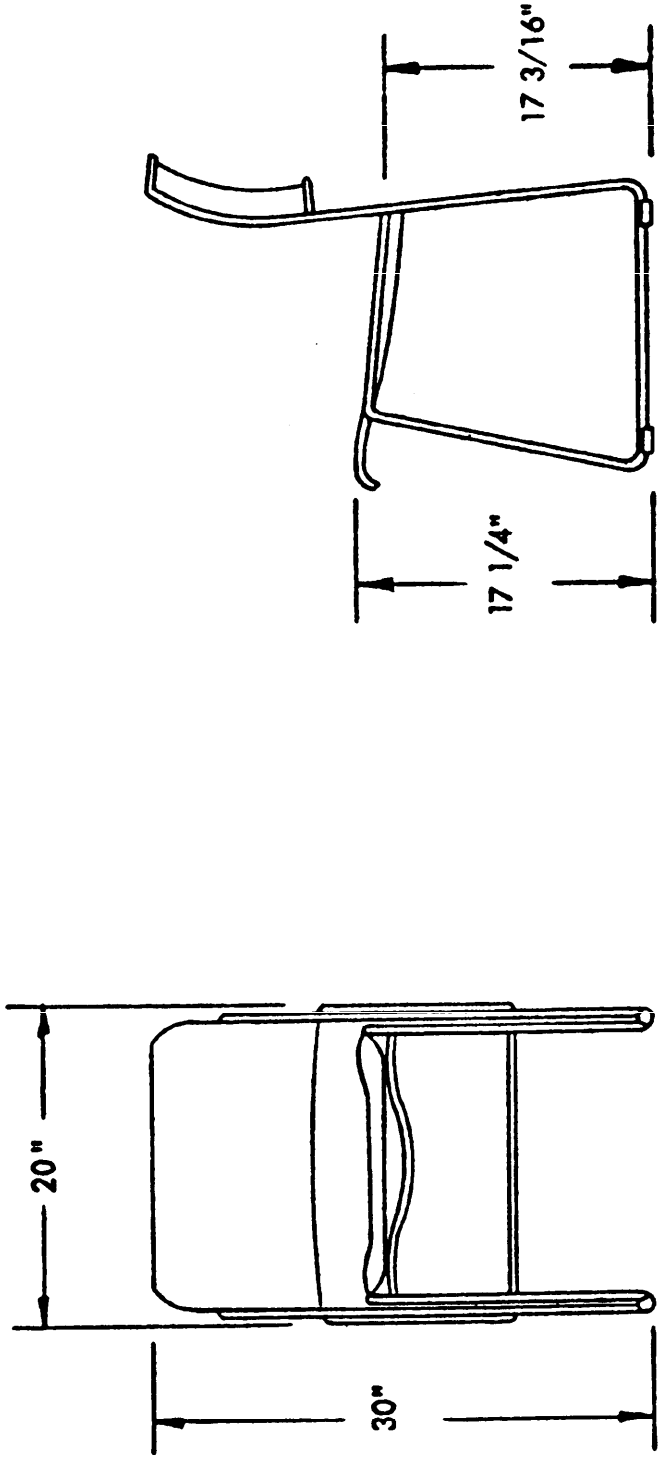

Drawing not to scale

Figure 1 - Type I, for messing areas.

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:13Z
Check the source to verify that this is the current version before use.

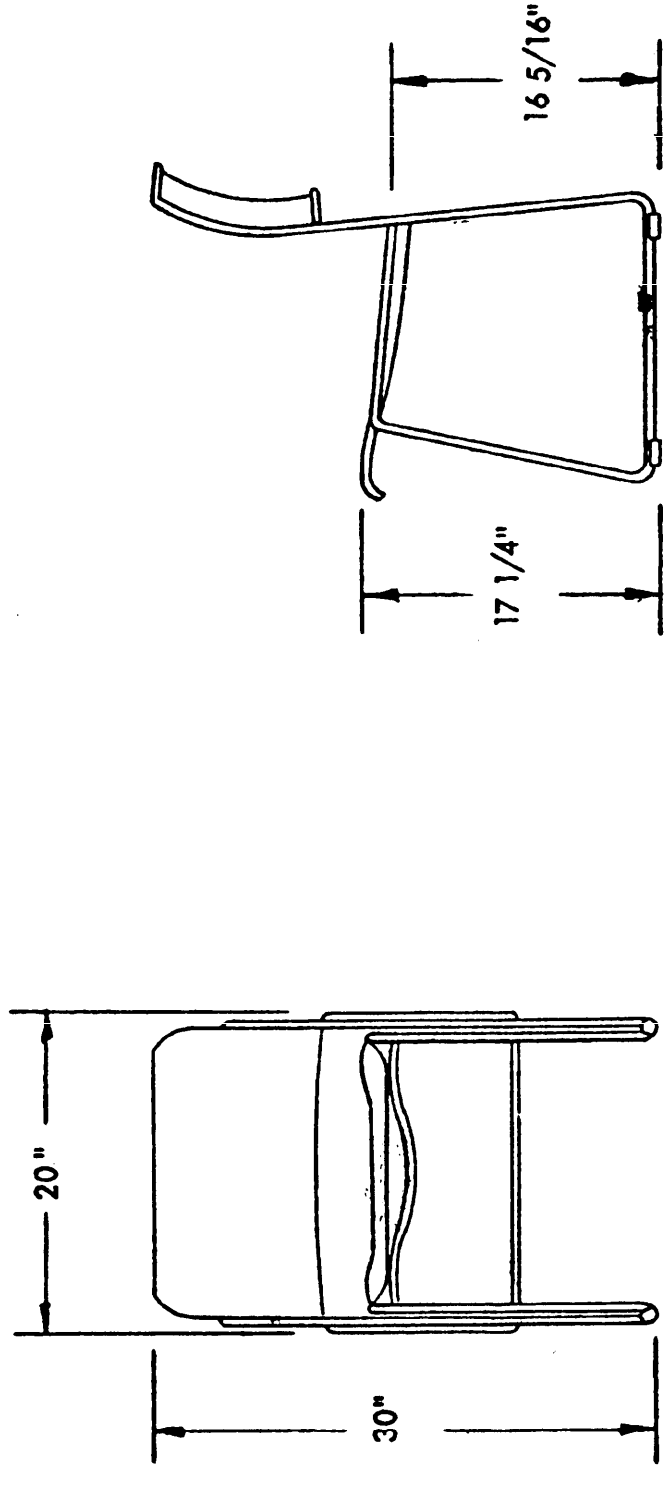

Drawing not to scale

Figure 2 - Type II, for lounge areas.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T22:13Z
Check the source to verify that this is the current version before use.

APPENDIX

INSPECTION SYSTEM REQUIREMENTS

10. SCOPE

10.1 Scope. This appendix establishes the minimum requirements for the supplier's inspection system. These requirements pertain to the inspections and tests necessary to substantiate product conformance to specifications, contract requirements and the required tests.

10.2 Conflicts. In the event of inconsistency between the requirements of this appendix and the contract, the contract provisions shall control. Also, in case of inconsistency, this fact shall be brought to the attention of the purchaser, in writing, prior to any action on the part of the supplier.

10.3 Options. This appendix has fewer requirements than MIL-Q-9858 and MIL-I-45208. However, the supplier, at his option, may use an established system complying with either of these specifications, provided there is no increase in cost, in lieu of the requirements of this appendix in order to maintain one uniform inspection system in his plant.

20. APPLICABLE DOCUMENTS

20.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the appendix to the extent specified herein.

MIL-Q-9858 - Quality Program Requirements.
MIL-I-45208 - Inspection System Requirements.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

30. REQUIREMENTS

30.1 Supplier responsibilities. The supplier shall provide and maintain an effective and economical documented inspection system which will assure that all material submitted to the purchaser for acceptance conforms to all contract requirements, whether manufactured by the supplier or by sub-contractors. The supplier shall perform or have performed the inspections and tests required to substantiate product conformance to specifications, contract requirements and required tests. The supplier's inspection system shall be submitted to the procuring activity or Supervisor of Shipbuilding (SupShip), where applicable, for review prior to initiation of production. The Government at its option will furnish written notice of the acceptability or nonacceptability of the supplier's inspection system. The supplier's inspection system and all parts of the supplier's facilities shall be available to the procuring activity or SupShip, where applicable, at all times during the manufacturing cycle, and the supplier shall notify them in writing, of any change to his inspection system prior to implementation of the changes. This inspection system shall be subject to disapproval if the changes would result in nonconforming products.

30.2 Documentations and records.

30.2.1 Inspection and testing documentation. Inspection and testing shall be prescribed by clear, complete and current instructions which will assure inspection and tests of materials, work in progress, and completed items as required by the specifications, contract requirements and required tests. The instructions shall contain the sampling requirements for acceptance or rejection.

30.2.2 Records. The supplier shall document the results of the inspections and tests by maintaining accurate records for his warranty period of all inspections and tests required. These records shall show the type of and number of observations, measurements and tests made, the number and type of deficiencies found, and of the quantitites sampled, the number accepted and the number rejected and the number of items in the lot.

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:13Z
Check the source to verify that this is the current version before use.

30.3 Measuring and test equipment. The supplier shall provide and maintain gauges and other measuring testing devices necessary to perform the required inspections and tests. These devices shall be calibrated, at established intervals, against certified standards, to insure continued accuracy. When requested, the supplier's measuring and testing equipment shall be made available to the procuring activity or SupShip, where applicable, to determine conformance of product with contract requirements.

30.4 Indication of inspection status. The supplier shall maintain a positive system for identifying the inspection status of the material. Identification may be accomplished by means of stamps, tags, routing cards, move tickets, tote box cards or other control devices. Such controls shall be of a design distinctly different from the identification of the procuring activity or SupShip, where applicable.

30.5 Nonconforming products. The supplier shall establish and maintain an effective and positive system, including identification, segregation, presentation and disposition of reworked or repaired products. All nonconforming products shall be positively identified and segregated to prevent use, shipment or intermingling with conforming products. Areas for nonconforming products shall be designated by the supplier.

30.6 Government inspection. The Government reserves the right to perform any of the required inspections or tests. The fact that the Government does accomplish such inspection or tests does not waive the requirement for the supplier to comply with the requirements of this appendix.

Source: https://assist.dla.mil -- Downloaded: 202640-19T22:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:13Z
Check the source to verify that this is the current version before use.

FOLD

COMMANDER
NAVAL SHIP ENGINEERING CENTER
CENTER BUILDING - SEC 6124B
PRINCE GEORGES CENTER
HYATTSVILLE, MARYLAND 20782

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF NAVY

DOD 316

COMMANDER
NAVAL SHIP ENGINEERING CENTER
CENTER BUILDING - SEC 6124B
PRINCE GEORGES CENTER
HYATTSVILLE, MARYLAND 20782

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:13Z
Check the source to verify that this is the current version before use.