MIL-L-24489B(SH)
21 April 1981
SUPERSEDING
MIL-L-24489A(SHIPS)
14 June 1974
(See 6.6)

MILITARY SPECIFICATION

LIFEBOAT, INFLATABLE, MARK 6, 25-PERSON CAPACITY

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a Mark 6 inflatable lifeboat, 25-person capacity, complete, including its inflation system and survival gear, and packed within its rigid stowage container, ready for use as abandon-ship equipment.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

L-S-626 - Sponges, Synthetic.
V-T-295 - Thread, Nylon.
W-B-101 - Battery, Dry.

MILITARY

MIL-K-818 - Knife, Pocket, General Purpose.
MIL-W-1053 - Whistle, Ball, Plastic.
MIL-A-3339 - Anchors, Sea, Life Raft.
MIL-D-3464 - Desiccants, Activated, Bagged, Packaging Use and Static Dehumidification.
MIL-F-3747 - Flashlights, Plastic Case, Tubular, (Regular Explosion-Proof, Explosion-Proof Heat Resistant, Traffic Directing, and Inspection-Light).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Naval Sea Systems Command, SEA 3112, Department of the Navy, Washington, DC 20362 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 1940

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:12Z
Check the source to verify that this is the current version before use.

MILITARY (Continued)

MIL-T-5038 - Tape, Textile and Webbing, Textile, Reinforcing, Nylon.
MIL-D-5531 - Desalter Kit, Sea Water, Mark 2.
MIL-B-8571 - Bag, Storage, Drinking Water.
MIL-A-8625 - Anodic Coatings, for Aluminum and Aluminum Alloys.
MIL-P-12647 - Pumps, Inflating-Deflating, Hand-Operated, Air, Single-Cylinder, Plunger-Type.
MIL-W-15117 - Water, Drinking, Canned, Emergency.
MIL-F-16895 - Food Packet, Survival, Abandon Ship.
MIL-R-17343 - Rope, Nylon.
MIL-C-17415 - Cloth, Coated, and Webbing, Inflatable Boat and Miscellaneous Use.
MIL-S-17980 - Sea Marker Packet, Inflatable Survival Equipment.
MIL-M-18371 - Mirror, Emergency Signaling, Mark 3.
MIL-S-18655 - Signal, Smoke and Illumination, Marine, MK 13, Mod 0.
MIL-P-24441 - Paint, Epoxy-Polyamide, General Specification for.
MIL-P-24441/1 - Paint, Epoxy-Polyamide, Green Primer, Formula 150.
MIL-P-24441/2 - Paint, Epoxy-Polyamide, Exterior Topcoat, Haze Gray, Formula 151.
MIL-I-24490 - Inflation System Equipment, Compressed Air, for Mark 5, Mod 2 (15-Person) and Mark 6 (25-Person) Inflatable Lifeboats.
MIL-C-24491 - Container, Fiberglass Reinforced Plastic, for Inflatable Lifeboats, Mark 5, Mod 2, and Mark 6.
MIL-I-45208 - Inspection System Requirements.
MIL-C-52950 - Crate, Wood, Open and Covered.

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods.
FED-STD-595 - Colors.

MILITARY

MIL-STD-129 - Marking for Shipment and Storage.
MS26529 - Oar, Metal, Sectional.
MS27826 - Plug Assembly, (Sealing Clamp) Life Raft Repair.
MS27980 - Fastener, Snap, Style 2 (Regular Wire Spring Clamp Type).

Source: https://assist.dla.mil -- Downloaded: 20261O-19T22:12Z
Check the source to verify that this is the current version before use.

DRAWINGS

NAVAL SEA SYSTEMS COMMAND (NAVSEA)

NAVSHIPS S8225(5)-1170434 - Inflatable Boat Equipment, Rescue Line, Detail and Arrangement.

NAVSHIPS 803-4382176 - Container, Fiberglass Reinforced Plastic, for Inflatable Lifeboats.

NAVSHIPS 803-4382177 - 25 Person Inflatable Lifeboat Mark 6.

PUBLICATIONS

NAVAL SEA SYSTEMS COMMAND (NAVSEA)

NAVSEA 0902-LP-037-7010 - Instruction for Packaging, Repair and Survival Gear.

NAVSEA 0905-LP-089-9010 - Operation and Maintenance Manual.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this speci ication to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A 167 - Stainless and Heat Resisting Chromium-Nickel Steel Plate, Sheet, and Strip, Specification for.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Ratings, Rules, and Regulations.

(Application for copies should be addressed to the Uniform Classification Committee Agent, Tariff Publication Officer, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC. AGENT

National Motor Freight Classification

(Application for copies should be addressed to the National Motor Freight Traffic Association, Inc., ATA TRAFFIC Dept., 1616 "P" Street, N.W., Washington, DC 20036.)

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:12Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF TRANSPORTATION (DOT)

Code of Federal Regulations, Title 49, CFR 171-178 - Hazardous Material Regulations.

Code of Federal Regulations, Title 46, CFR 160.061 - Fishing Tackle Kit, Emergency for Merchant Vessels.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Qualification. Lifeboats furnished under this specification shall be products which are qualified for listing on the applicable qualified products list at the time set for opening of bids (see 4.3 and 6.3).

3.2 First article sample. Prior to beginning production, samples shall be examined and tested as specified in 4.4 (see 6.4).

3.3 Material. Material shall be as specified herein and as shown on the applicable drawings.

3.3.1 Coated cloth. Coated cloth used in the construction of the lifeboat shall conform to MIL-C-17415 and shall be of the following types and classes:

Part	Type	Class
Bottom	16	A
Bulkheads	16	A
Canopy	2	A or B
Canopy bows	16	A
Gas cylinder holders	16	A
Cross tube	16	A
"Dee" ring patches	16	A
Equipment container	16	A
	2	A or B
Inflatable floor	11	--
Life line patches	16	A
Lower tube	16	A
Pockets	16	A
Tape	8 1/	A or B
Upper tube	16	A
Oar bag	16	A
Boarding ramp	16	A
Ballast bags	16	A

1/ An alternative tape fabric made of type 2 cloth of MIL-C-17415 coated on each side with 9 ounces of synthetic coating may be used.

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:12Z
Check the source to verify that this is the current version before use.

3.3.2 Color. Lifeboat shall be the natural color of the finished coated cloth. No pigmentation of the coated cloth is required except that the side of the canopy visible from the air when in use shall be pigmented to a color of international orange, color 28915 or 38903 of FED-STD-595.

3.3.3 Fasteners. Fasteners shall conform to MS27980.

3.3.4 Finish. Aluminum alloy parts shall have an anodic coating conforming to MIL-A-8625, type II, class I, overcoated with two coats of epoxy-polyamide paint conforming to MIL-P-24441, one coat conforming to MIL-P-24441/1, formula 150 to a minimum of 2 mils dry film thickness (dft), and one finish coat conforming to MIL-P-24441/2, formula 151 to a minimum of 2 mils dft. Individual coats of paint in excess of 4 mils shall be avoided. Corrosion-resistant steel and plated parts shall be left unpainted.

3.3.5 Rope. Rope, except as otherwise specified hereinafter, shall be nylon, conforming to MIL-R-17343, and shall be as follows:

Part	Circumference (inches)
Rescue lines	3/4
Life lines	3/4
Righting lines	1-1/8

The ends of nylon lines shall be smoothly fused or seized. When seizing is required, it shall consist of a minimum of six turns.

3.3.6 Sea painter. Sea painter shall be 5/32-inch braided nylon as specified in MIL-C-24491.

3.3.7 Thread. Sewing thread shall conform to V-T-295, type II, class 2, subclass A, size E.

3.3.8 Metal parts. Metal parts other than those specified on the drawings and herein shall be corrosion-resistant steel conforming to ASTM A 167, types 304, 316, 316L, or of a corrosion-resistant material certified by test, or specification, as suitable for continuous exposure to a salt water marine environment.

3.3.9 Recovered materials. Unless otherwise specified herein, all equipment, material, and articles incorporated in the products covered by this specification shall be new and shall be fabricated using materials produced from recovered materials to the maximum extent practicable without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products is allowed under this specification unless otherwise specifically specified.

3.4 Component parts. The completed lifeboat shall consist of a container and components in accordance with MIL-C-24491, the lifeboat in accordance with Drawing 803-4382177, and all equipment specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:12Z
Check the source to verify that this is the current version before use.

3.5 Weight. Total weight of the completed lifeboat (see 3.4) shall not exceed 500 pounds.

3.6 Manufacture and assembly.

3.6.1 Dimensions and shape. Dimensions and shape of the lifeboat shall be as shown on Drawing 803-4382177. For reference purposes, the bow of the lifeboat is defined as the end opposite the boarding ramp; the stern is defined as the end of the raft containing the boarding ramp.

3.6.2 Laps and seams. Laps and seams shall be secured only by vulcanizing. Sewing shall not be used in any seams or through the coated cloth of any air chamber. Sewing will be permitted only in the construction of patches, disks, flaps, life line supports, cylinder holders and pockets, but not in their final attachment to the lifeboat. Vulcanizing in a steam or air pressure autoclave shall be required, except for the canopy installation which may be assembled and attached by the use of room temperature curing cement. The seam overlap shall be sufficient to withstand a pull test load in excess of the strength of the coated fabric joined after vulcanizing. In no case shall the overlap be less than 3/4 inch. When subjected to a tensile load of 40 pounds per inch of width at a temperature of 200°F ± 2°F, the untaped seams shall show no sign of slippage after 24 hours. Cement shall be applied in a line parallel to the edges of the seams, seam tapes, gum stripping, attachment patches, etc., and shall extend a minimum of 1/8 inch and a maximum of 1/2 inch beyond the edges. Seams shall be covered inside and outside with tape conforming to MIL-C-17415, type 8, class B, at least 1-5/8 inches wide after application, or gum stripping, having a gage thickness of 0.032 inch ± 0.005 inch and a minimum width of 3/4 inch after application. Tape or gum stripping may be omitted on the outside of a lap where another layer of fabric covers the lap. Tape or gum stripping shall be applied without excessive tension, and shall be so laid that approximately an equal amount is on each side of the seam edge which it covers. Gum or fabric discs may be used at the intersections of seam laps.

3.6.3 Bulkhead. Upper and lower tubes and the center (midship) canopy bow shall be fitted with internal vertical bulkheads, dividing each tube into two separate compartments. These bulkheads shall be of hemispherical, conical, or flexible vertical design. Bulkheads shall be located approximately as shown on Drawing 803-4382177 in order that the volume of the compartments shall be approximately equal. Bulkheads shall be of coated cloth and shall be flanged for direct attachment to the inside of the tube. Flange attachment shall be reinforced with a shoe tape no less than 2 inches wide, centerfolded into a "V", attached 1 inch on the tube at the bulkhead side opposite the flange attachment. Bulkhead attachment shall withstand a pressure of 3.8 pounds per square inch (lb/in^2), with the adjacent compartment uninflated and vented. There shall be no failure of the bulkhead or its attachment when tested in accordance with 4.9.3.

3.6.4 Upper and lower tubes. The upper and lower hull tubes, separate airtight chambers, shall be constructed and assembled, one atop the other, as shown on Drawing 803-4382177. The attachment shall be reinforced inboard and outboard with two plies of cloth tape conforming to MIL-C-17415, type 8, class B, a minimum of 3 inches wide, centerfolded into a "V" and inserted

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:12Z
Check the source to verify that this is the current version before use.

into the crotch of the interface along the contact surface of the two tubes, approximately 1.5 inches, on each tube surface. Each tube shall withstand an internal pressure of 5 lb/in^2. Attachment loops or grommeted tabs shall be fitted to the upper and lower tubes for securing the radar screen.

3.6.5 Bottom. A bottom, applied without tension, shall be attached to the lower tube and to the cross tube as shown on Drawing 803-4382177. The attachment shall be reinforced by a shoe of two plies of cloth tape conforming to MIL-C-17415, type 8, class B, a minimum of 3 inches wide, centerfolded into a "V" and inserted into the crotch of the interface along the inside contact surface of the lower tube and the bottom, approximately 1-1/2 inches on each, around the entire peripheral distance. Lifeline patches shall be fitted to the bottom as shown on Drawing 803-4382177 for securing the survival gear bag.

3.6.6 Ballast bags. Four ballast bags as shown on Drawing 803-4382177 shall be fitted to the bottom of each boat to improve stability.

3.6.7 Inflatable floor. An inflatable floor, consisting of two sections, shall be constructed of coated cloth conforming to MIL-C-17415, type 11 as shown on Drawing 803-4382177. Floor construction shall withstand an internal working pressure of 2 lb/in^2 and the overpressure test of 4.9.2.2.

3.6.8 Cross tube. A cross tube which inflates simultaneously with the lower flotation tube shall be installed as shown on Drawing 803-4382177. It shall be located so that the lower surface of the tube is tangent to that of the hull tube. The bottom shall be attached to the cross tube (see 3.6.5).

3.6.9 Boarding ramp. A boarding ramp which inflates simultaneously with the lower flotation tube shall be installed as shown on Drawing 803-4382177.

3.6.9.1 Boarding net. A boarding net as shown on Drawing 803-4382177 shall be provided. Horizontal lines shall be fitted with 5/8-inch outside diameter (o.d.) neoprene tubing to facilitate grasping. Tubing shall have a Shore durometer (type A) hardness of 70 to 75.

3.6.10 Canopy bows. Three canopy bows shall be provided as shown on Drawing 803-4382177. The bows for the canopy support shall be inflated simultaneously with the upper tube. The center (midship) canopy bow shall be fitted with a bulkhead (see 3.6.3) and Drawing 803-4382177.

3.6.11 Canopy. The canopy shall be as shown on Drawing 803-4382177. The exterior layer shall be cemented to the outside tangent surface of the bows, and the interior layer cemented to the inside surface of the bows. A sufficient number of 3/8-inch diameter holes shall be provided in the interior layer to allow the escape of air in order to facilitate packing of the boat. Inside and outside canopy seams shall be covered with a 1-5/8-inch wide strip of canopy fabric (see 3.3.1 and 3.3.2). The inner and outer canopy closures shall be secured with snap fasteners around the top and sides to secure them in the closed position. The bottom of the closure flaps shall be cemented to the upper (gunwale) tube. Grommeted tie patches shall be cemented to the gunwale tube at the openings, both inside and outside, to

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:12Z
Check the source to verify that this is the currentversion before use.

allow the closures to be tied, furled in the open position, with 1/8-inch diameter nylon line. A 5-inch weather flap covering the upper edge of outer closure shall be cemented to the outer canopy fabric at the closure.

3.6.11.1 Reflective tape. Reflective tape shall be 3 inches wide, 3M SOLAS, grade 3150 reflective sheeting, or equal, attached using Scotchlite primer type 2141, or equal. Corners of all tape strips shall be rounded prior to attachment to the boat fabric. The tape shall be cut into 30 strips each measuring 8 inches long by 3 inches wide, and installed 10 each, equally spaced, on the exterior of each canopy bow as shown on Drawing 803-4382177.

3.6.12 Inflation system. The inflation system shall consist of two cylinder assemblies in accordance with MIL-I-24490, type II, and shall be installed as shown on Drawing 803-4382177. The cylinder valves, after final assembly with the boat, shall be isolated from the flotation tubes by a protective packing or covering of a molded form fabricated from polystyrene foam, polyurethane foam, or polyethylene foam to prevent damage to the boat from drop impact. Rags or waste are not acceptable substitutes.

3.6.13 Stowage pockets. Stowage pockets shall be provided for the following items:

Items stowed in pocket	Number of pockets required
Hand pumps, with valve adapters	2
Sealing clamps and operation manual	1
Floatable knife	1
Rescue line	1
Spare sea anchor	1

3.6.13.1 Pockets. Pockets shall be clearly and indelibly labeled to indicate the contents thereof. Pockets shall be fitted with fasteners (see 3.3.3) and attached by vulcanizing as high as possible to allow sufficient headroom for the occupants.

3.6.14 Cylinder holders. Two cylinder holders shall be provided and installed as shown on Drawing 803-4382177. Cylinder holders shall be fitted with nylon draw-strings and closed around the bottom of the cylinder. Cylinder holder shall be of such size as to prevent contact by the cylinder or valve with the upper or lower tubes in the inflated or deflated position. Chafing patches shall be fitted on both hull tubes adjacent to the cylinder valve locations. Cylinder holders shall be sufficiently rugged to withstand the forces developed while the cylinders are being discharged and when the lifeboat is dropped from a height of 65 feet into the water. Cylinder holders shall be so located that when the cylinders are in place, the hose between each cylinder and manifold shall not be bent to a radius smaller than 4 inches (inside) when the lifeboat is in either the inflated or deflated condition.

3.6.15 Lines.

3.6.15.1 Life lines. Life lines (see 3.3.5) shall be fitted around the inner and outer periphery of the lifeboat as shown on Drawing 803-4382177. The slack in the bights for the outer line shall be such that

Source: https://assist.dla.mil -- Downloaded: 20261O-19T22:12Z
Check the source to verify that this is the current version before use.

the line will extend to between 3 inches above and even with the underside of the tube. The slack in the bights for the inside line shall be not less than 2 inches.

3.6.15.2 Sea painter. A painter assembly as shown on Drawing 803-4382176 shall be provided. Cylinder actuating cables shall be attached to the sea painter in such a manner that the cylinder valves are opened before any strain is taken against the connection to the lifeboat.

3.6.15.3 Rescue line. A rescue line (see 3.3.5) shall be provided in accordance with Drawing S8225(5)-1170434 and fitted as shown on Drawing 803-4382177.

3.6.15.4 Righting line. Three righting lines (see 3.3.5) shall be installed as shown on Drawing 803-4382177. The lines shall be knotted at 1-foot intervals to facilitate grasping. The length of the righting lines, after knotting, shall be approximately 15 feet.

3.6.16 Rain catcher tubes. Rain catcher tubes shall be as shown on Drawing 803-4382177. The tubes shall be rolled and secured in the stowed condition prior to packing the lifeboat.

3.6.17 "Dee" rings. "Dee" rings shall be provided and fitted as shown on Drawing 803-4382177.

3.6.18 "Dee" ring patches. "Dee" ring patches shall be constructed and fitted as shown on Drawing 803-4382177.

3.6.19 Life line patches. Life line patches shall be installed around the inner and outer periphery of the lifeboat as shown on Drawing 803-4382177. Each patch shall withstand a 350-pound pull exerted in a direction perpendicular to the base of the patch.

3.6.20 Boarding light. A boarding light located atop the canopy, powered by a seawater activated battery, shall be provided. The battery shall be located on the bottom of the hull tube and configured in such a manner that the initial unfolding action of the boat will extract the battery sealing plugs. The battery shall be Chromalloy type L-12, or equal. Locations and installation of the lights and batteries shall be as shown on Drawing 803-4382177.

3.6.21 Interior lights. Two interior lights located on the underside of the forward and midship canopy bows inside the boat shall be provided. They shall be powered by a seawater activated battery separate from the boarding light battery (see 3.6.20). Installation and locations shall be as shown on Drawing 803-4382177. The battery shall be Chromalloy type L-12, or equal, installed as described in 3.6.20.

3.6.22 Radar reflective screens. Radar reflective screens shall be made of metallized (deposited silver) nylon mesh, coated white with a waterproof coating with the interstices open. The mesh shall have a minimum of 12 threads per inch in each direction and a maximum of 22 threads per inch in each direction. Screens shall be bound with 1-inch grommeted nylon tape conforming to MIL-T-5038, type II. Grommets shall be brass, size number

Source: https://assist.dla.mil -- Downloaded: 202640-19T22:12Z
Check the source to verify that this is the current version before use.

zero. Sewn loops may be provided in lieu of grommets. Nylon line of 1/8-inch diameter shall be used for securing the bottom of the screens to the loops provided. Loops shall be so located that the bottom edge of the screens may be drawn taut. Snap fasteners for holding the screens shall conform to 3.3.3. Location of the screens shall be as shown on Drawing 803-4382177.

3.6.23 Equipment. The contractor shall furnish the following items of equipment with each lifeboat:

Item	Quantity
Operation and maintenance manual	2
Hand pumps	2
Valve adapter	2
Sealing clamp, 3 inches, MS27826-1	2
Sealing clamp, 5 inches, MS27826-2	2
Sealing clamp, 7-1/2 inches, MS27826-3	2
Survival gear bag	1
Oars, MS26529	2
Sea anchor and line	2
Rescue line (see 3.6.15.3)	1
Floatable knife	1
Oar bag	1

3.6.23.1 Operation and maintenance manual. Each lifeboat shall be furnished two copies of an operation and maintenance manual 6 by 9 inches, printed on waterproof paper with waterproof ink. One copy of the manual shall be placed in the pocket. This pocket shall be stencilled in large letters on the outside "Instruction Manual." The second copy shall be packaged in quantities equating to one ship's worth and forwarded to the user activity marked to the attention of the First Lieutenant, for use in training. The required number of manuals will be forwarded to the contractor as Government-furnished equipment (see 3.11).

3.6.23.2 Hand pumps. Two topping-off hand pumps conforming to MIL-P-12647, each with valve adapter, shall be provided and installed as shown on Drawing 803-4382177.

3.6.23.3 Valve adapters. Two valve adapters fitting the topping-off valve and attached to the hand pumps (see 3.6.23.2) shall be provided.

3.6.23.4 Sealing clamps. Six sealing clamps, two each of sizes 3, 5, and 7-1/2 inches, as shown on MS27826 shall be provided. The clamps shall be packaged in two sets of three clamps each with a set made up of one clamp of each size.

3.6.23.5 Survival gear bag. One survival gear bag as shown on Drawing 803-4382177 shall be provided.

3.6.23.6 Oars. Two oars conforming to MS26529 shall be provided.

3.6.23.7 Oar bag. An oar bag as shown on Drawing 803-4382177 shall be provided.

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:12Z
Check the source to verify that this is the current version before use.

3.6.23.8 Sea anchors. Two sea anchors conforming to MIL-A-3339, type II, size 1, shall be provided. One shall be attached to the boat as shown on Drawing 803-4382177 and the second shall be stowed in the sea anchor pocket (see 3.6.13).

3.6.23.9 Lifeboat container. A lifeboat container conforming to MIL-C-24491 shall be provided.

3.6.23.10 Floatable knife. A floatable knife as shown on Drawing 803-4382177 shall be provided.

3.6.24 Protective packaging. Protective packaging for items listed below (see 3.6.23) shall be in accordance with the requirements of NAVSEA 0902-LP-037-7010. Except for the maintenance manuals, a one unit (25 gram) bag of desiccant conforming to MIL-D-3464, type I or II, shall be included in each package. Package size, expulsion of excess air and closure (heat sealing) shall be as specified in NAVSEA 0902-LP-037-7010.

Packaged items	Number of packages
Hand pump with detached hose and adapter	2
Operation and maintenance manual	1
Sealing clamps, 3, 5, and 7-1/2 inches	6
Floatable knife	1
Sea marker, fluorescein	1
Flashlight batteries	1
Motion sickness tablets, dimenhydrinate, 50 milligram	1

After protective packaging, the items shall be placed in their respective stowages in the lifeboat.

3.6.25 Survival gear. The equipment listed in table I shall be provided and packed into the survival gear bag (see 3.6.23.5) as shown on figure 1, which shall be closed as shown on figure 2.

TABLE I. Survival gear.

Item	Specification	Quantity
Packet, food[1/]	MIL-F-16895	125
Water, canned, 10-ounce cans	MIL-W-15117	75
Opener, beer can type	MIL-W-15117	6
Desalter kit, type II	MIL-D-5531	5
Storage bag, drinking water, size A	MIL-B-8571	2
Flashlight, type II, style I	MIL-F-3747	1
Battery, dry, flashlight (alkaline, size D)[2/]	W-B-101	4
Sea marker, fluorescein, canister type	MIL-S-17980	1
Mirror, signalling emergency, type II	MIL-M-18371	1
Sponge, cellulose, type I, size 10	L-S-626	2
Knife pocket	MIL-K-818	1
Whistle, signalling, plastic, type II	MIL-W-1053	1

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:12Z
Check the source to verify that this is the current version before use.

TABLE I. Survival gear.- Continued

Item	Specification	Quantity
Measuring cup, plastic, 8 ounce (graduated)	Commercial	2
Motion sickness tablet, dimenhydrinate, 50 milligram	Commercial	250
Bailer, plastic, 2-quart capacity	Rubbermaid, part 2885, or equal	1
Kit, first aid	See 3.11	1
Kit, signalling	MIL-S-18655 and see 3.11	1
Fishing kit, survival	CFR 160.061	1
Flashlight bulbs (PR6)	Commercial	1

1/ Each food packet will be provided with the instruction: "Rations for one person for 1 day."
2/ Commercial "alkaline energized" batteries may be substituted.

3.7 Stowing and packing of equipment on board the boat.

3.7.1 Survival gear. The packed survival gear bag (see 3.6.25) shall be secured in its place adjacent to the cross tube as shown on Drawing 803-4382177.

3.7.2 Oars. Oars shall be packed in the oar bag (see 3.6.23.7).

3.7.3 Equipment. Remaining items of equipment shall be stowed in the pockets specified in 3.6.13.1.

3.7.4 Sea painter. Sea painter shall be coiled into the storage tube in such a manner as to allow free payout of the line, when rigged as shown on Drawing 803-4382177. The faking tube shall then be inserted into the packed boat adjacent to the inside of the painter cork hole in the end of the rigid container, oriented to facilitate direct pull of the line out of the faking tube.

3.8 Folding instructions. Lifeboat shall be folded for packing into its container (see 3.6.23.9) as follows, care being taken in the handling to preclude damage to the boat or its inflation system components or discharging of the air cylinders. Talc/talcum used in the packaging process shall be free of asbestos and asbestiform-like materials.

(a) The working area shall be clean, dry, and free from obstructions, snags, and other objects or obstacles that may inflict damage to the boat during handling. The entire boat shall be dusted lightly with talc.
(b) The packed survival gear bag (see 3.6.25) shall be located in place (see 3.7.1) along the longitudinal centerline of the boat as shown on figure 3, step 2. The closure end of the bag

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:12Z
Check the source to verify that this is the current version before use.

in this position shall be located even with the after side of the center canopy arch tube.

(c) The packed oar bag (see 3.7.2) shall be placed along the starboard (right) side of the survival gear bag.

(d) The oar bag shall be tied to the survival gear bag and the survival gear bag shall be secured in place (see 3.7.1).

(e) The floor sections (see 3.6.7) shall be installed, securing them in place using the tabs and lines intended for this purpose.

(f) The stern closure shall be rolled flap down, leaving the portal open, and the bow portal shall be closed and secured by by its snap fasteners.

(g) The boat shall be completely deflated, evacuating all the air from within the various air compartments until the boat is flat. All six topping-off valves (two in the inflatable floor sections (see 3.6.7) and one in each hull and gunwale tube compartment (see 3.6.4 and 3.6.23.3)) shall be closed hand-tight. The boat shall be rechecked to assure that the valves are closed.

(h) Both the sea anchor lines shall be attached to the bow "dee" ring, by means of a bowline knot, with the free ends seized to the standing parts. The spare sea anchor shall be inserted into its stowage pocket and the pocket shall be snapped closed.

(i) Two fully charged air cylinders shall be secured in accordance with MIL-I-24490 in the cylinder holders (see 3.6.14), one on each side of the boat. The cylinder having the flexible conduit protection for its pull cable shall be installed in the pocket on the starboard side.

(j) The various elbow and hose connections between the manifolds and cylinder valves shall be assembled in accordance with MIL-I-24490 using the torque valves specified.

(k) After step (j) above is accomplished, it shall be assured that hoses are not kinked, and that each lays in a plane parallel to the tube and depicts a long "U" shape, manifold to cylinder valve.

(l) The painter line shall be secured to the towing line and rig as shown on Drawing 803-4382177.

(m) The water-activated batteries (see 3.6.20 and 3.6.21) shall be inserted into their pockets on the underside of the hull tube, rigging them with the line as shown on Drawing 803-4382177 to provide for automatic removal of their plugs upon inflation of the boat. The electrical plug for each light shall be connected each to its respective battery.

(n) The stern section of the boat shall be folded toward the bow, pulling it hard against the survival gear bag within the boat (see step 2 of figure 3).

(o) All of this section forward of the bag shall be folded back over the bag (see step 3 of figure 3).

(p) The boarding ramp shall be folded forward, neatly over the previous folds (see step 4 of figure 3).

(q) The boarding ladder shall be folded back on to the unfolded (forward) section of the boat, spreading it out flat (see step 5 of figure 3).

Source: https://assist.dla.mil -- Downloaded: 20260-19T22:12Z
Check the source to verify that this is the current version before use.

(r) The forward section of the boat shall be folded back, to the front of the survival gear bag (see step 6 of figure 3). Lay the loose sea anchor on the bottom of the bow, so that the sea anchor will deploy early in the inflation process.

(s) This section shall be folded hard over the survival gear bag and previous folds, steps (n), (o), and (p) above. Following this fold, the hull tube inflation "dee" ring (see piece 20, section 8-A, Drawing 803-4382177) shall be assured to be adjacent the port (left) cylinder valve (see step 7 of figure 3).

(t) The pull cable shall be attached from the cylinder valve to the "dee" ring. This cable is not contained in protective conduit. Should the conduit be on this valve, the cylinders are improperly installed (see step 1 of figure 3) and shall be corrected.

(u) The port side of the boat shall be folded snugly over the previous folds, steps (n) through (s) above, tucking the port cylinder against the survival gear bag (see step 8 of figure 3).

(v) The starboard (right) side of the boat over shall be folded, hard against the survival gear bag, so that the cylinder rests on the top of the folded boat (self-explanatory, not shown on figure 3).

(w) Using load binders (Gripper Model 106, or equal), the folded boat shall be compressed making sure that the binder straps are over the cylinder, step (v) above. Properly done, the folding procedure, steps (n) through (v) above should produce a rounded package no greater than 48-inches long, 26-inches high, the maximum size possible for fit into the container.

(x) With the load binders still in place, compressing the boat, the boat shall be placed into the container (see 3.6.23.9) lower half assuring that the attachment hook of the conduit protected pull cable is adjacent to the painter hole of the container (see Drawing 803-4382176).

(y) The center of gravity of the folded boat in the container lower half shall be checked by allowing it to rock freely, side-to-side. The container half shall come to rest with its gasket surface level plus or minus 10 degrees. In the event this does not occur, the boat shall be rotated as necessary to meet this requirement, so that the container will right itself and the boat will inflate right-side-up in a seaway.

(z) The load binders shall be removed.

(aa) The exposed pull cable hook shall be attached to the bight in the painter line (approximately 10 feet from the bow "dee" ring attachment, see step (l)). The faked painter shall be placed in its tube, in the end of the boat pack, assuring also that the cable protective conduit end is adjacent the painter hole in the rigid container.

(bb) The container top half shall be placed on the packed lower half, seating on the gasket. Both halves shall be pulled together with the load binders, assuring also that the boat is not pinched between the container halves at the gasket joint.

(cc) The painter cork (see piece 90 of Drawing 803-4382177), shall be slid along the painter, up to the painter cork hole in the container, and the cork shall be inserted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:12Z
Check the source to verify that this is the current version before use.

(dd) The banding straps shall be attached (see piece 6 of Drawing 803-4382176) while the load binders are still tight on the container. The bands shall be tightened snugly around the container assuring that there is no space, or play, between the faying surfaces of the container and the banding straps. The bands shall be clamped and the load binder shall be removed.

(ee) The 6 inch wide sealing band shall be installed to cover the joint between the container top and bottom halves. The band width shall be placed equally on each of the halves.

3.9 Marking. Markings shall be legible, Gothic letters and numbers, and shall be thoroughly dry prior to packing. The ink used shall have an acidity (pH) of 5.0 to 8.5 and shall contain no ingredient which is deleterious to the material being marked.

3.9.1 Instructions. Instructions relative to topping-off and deflating shall be provided on the tubes near the topping-off valves. Instructions relative to topping-off and deflating shall read as follows:

"TO INFLATE - Insert pump with adapter into valve. Open valve to right (clockwise). Pump until firm. Close valve to left (counterclockwise)."

"TO DEFLATE - Turn valve to right (clockwise)."

3.9.2 Labeling. Each lifeboat shall have fitted on the top of the lower tube, at the stern, a molded patch, or an equivalent label satisfactory to NAVSEA, containing the following information:

"Lifeboat, inflatable, Mark 6
Stock No._____
Maximum capacity - 25 persons
Built for the United States Navy
Contractor, city, month, year
Contract No. _____
Registry No. _____"

3.9.2.1 Registry numbers assigned to these lifeboats will be furnished by the contacting officer.

3.9.3 Righting instructions. Each lifeboat shall have righting instruction patches fabricated from canopy fabric (see 3.3.1) as specified in 3.9.3.1 and 3.9.3.2. Outside corners of all patches shall be rounded. Characters shall be 1 inch high, except that the words "RIGHTING INSTRUCTIONS" in the titles shall be 2 inches high.

3.9.3.1 Two patches (9-1/2 inches by 28 inches each) containing the following legend shall be located one on the port side and one on the starboard side, inverted, just forward of each inflation cylinder:

"RIGHTING INSTRUCTIONS

1. Three men climb up onto boat bottom.
2. Further instructions on bottom."

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:12Z
Check the source to verify that this is the current version before use.

3.9.3.2 Two patches (24-1/2 inches by 28 inches) shall be located amidships one each port and starboard on the boat's bottom oriented with the downward pointing arrow of step 2 pointing outboard containing the following information shall be provided:

"RIGHTING INSTRUCTIONS

1. Each man take hold of one righting line.
2. Position feet on either side of righting line while standing over this edge of the boat.
3. Pull up on righting line till taut.
4. Fall backwards hard and together while pulling righting line hand over hand toward you."



This patch may be fabricated from either one or two fabric pieces at the contractor's discretion.

3.9.4 International Morse Code for the English alphabet A through Z and for Arabic numerals zero through nine shall be printed on a 8-inch by 12-inch area or on a piece of canopy fabric and cemented on the inside of the boat canopy adjacent to the stern entrance. Each code symbol shall be identified by its appropriate letter or numeral counterpart next to the symbol.

3.10 Performance.

3.10.1 Inflation speed. When tested in accordance with 4.9.1, the lifeboat shall inflate to its designed shape in not more than 30 seconds. After a stabilization period, the gage pressure in any compartment shall not exceed 3.8 lb/in^2.

3.10.2 Over pressure discharge. When tested in accordance with 4.9.2, the pressure after 20 minutes shall be not less than 4.6 lb/in^2.

3.11 Government-furnished equipment. The following equipment will be Government-furnished in accordance with acquisition requirements:

(a) Operation and maintenance manual, NAVSEA 0905-LP-089-9010.
(b) Kit, first aid, NSN 6545-00-168-6893.
(c) Kit, signalling, NSN 2T-1370-00-309-5028.
(d) Fiberglass container, lifeboat, NSN 1H-4220-00-148-8603.
(e) Kit, desalter, NSN 9C-4610-00-372-0592
(f) Sealing band, container, 6 inches wide.

3.12 Workmanship. Whenever, in the manufacturing process, repair or reworking is found to be necessary, it shall be performed by heat vulcanization either by the local application of heat or by autoclaving the entire lifeboat. A maximum of 15 repairs per lifeboat, including bulkhead repairs, may be made. A maximum of three bulkhead repairs may be made to any one boat, while not more than 15 percent of the lifeboats, in any contract or order, may have in excess of one bulkhead repair. A multiplicity of pin holes in any particular section is not considered repairable. Both an inner and outer fabric patch shall be used to repair tears or cuts. Treating or swashing the

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:12Z
Check the source to verify that this is the current version before use.

inflatable members of the lifeboat with latex or any other sealing agent is not permissible (see 4.6.2). The number, type, and location of repairs for each boat shall be recorded and forwarded with those boats submitted for qualification and first article inspection.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection system. The contractor shall provide and maintain an inspection system acceptable to the Government for supplies and services covered by this specification. The inspection system shall be in accordance with MIL-I-45208.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Qualification inspection (see 4.3).
(b) First article inspection (see 4.4).
(c) Quality conformance inspection (see 4.6).

4.3 Qualification inspection. Qualification inspection shall be conducted at a laboratory satisfactory to NAVSEA. The inspection performed on the completed lifeboat and component material shall consist of the examination specified in 4.7 and the tests specified in 4.9.1 through 4.9.8. Samples of materials used in the fabrication of lifeboats shall be examined and tested to ascertain their conformance to the applicable specification or the requirements for the material as specified herein.

4.4 First article inspection. First article inspection shall consist of the examination specified in 4.7 and the tests specified in 4.9.1 through 4.9.8.

4.4.1 First article test reports. The contractor shall prepare a first article test report in accordance with the data ordering document included in the contract or order (see 6.2.2).

4.5 Samples for qualification inspection or first article inspection. The following samples and documentation shall be submitted for qualification inspection, or first article inspection, as required:

(a) One lifeboat complete with equipment and stowage container.
(b) Four yards of all coated cloth used (vulcanized).
(c) Four yards of all cloth used (uncoated).
(d) Ten samples of life line patches cemented and vulcanized to a 7-inch diameter piece of tube fabric in accordance with 3.3.1 and MIL-C-17415.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:12Z
Check the source to verify that this is the current version before use.

(e) Four sample "dee" ring patches vulcanized to an 18-inch by 14-inch piece of tube fabric in accordance with 3.3.1 and MIL-C-17415.
(f) Four vulcanized seams 7-inches wide by 12-inches long of tube fabric in accordance with 3.3.1 and MIL-C-17415. Seams are to be prepared and vulcanized in the same manner as the lifeboat tube seams.
(g) For each type of rope or line used (see 3.3.5), a certificate of conformation to appropriate specification.
(h) Record of number, types, and location of repairs to (a) above.

4.5.1 First article inspection samples shall be forwarded to the Officer-in-Charge, David W. Taylor Naval Ship Research and Development Center, Annapolis Laboratory, Annapolis, MD 21402.

4.6 Quality conformance inspection. Each lifeboat shall be inspected for all characteristics which determine whether or not the unit will perform its primary life saving function which depends upon workmanship rather than design factors. Inspection shall be conducted by the contractor under the direct surveillance of the Government representative. Inspection shall consist of the following and shall be conducted in the order listed:

Inspection	Paragraph reference
Examination	4.7
Inflation test	4.9.1
Overpressure leakage test	4.9.2 and 4.9.2.1
Working pressure and bulkhead test	4.9.3
Lap seam strength test	4.9.5

4.6.1 Lap seam sample. The contractor shall prepare one lap seam sample per lifeboat and shall subject this sample to the test specified in 4.9.5. The seam sample shall be cured simultaneously with the specific lifeboat it represents. These test samples will be checked by the cognizant Government representative and disposed of. Test records of these samples shall be marked and stored in an accessible location for later reference, for a period of 2 years following completion of the contract.

4.6.2 Lifeboats not meeting the requirements of the inspection specified in 4.6 shall be corrected prior to submitting the lifeboats for acceptance by the Government. Treating or swashing any inflatable member of the lifeboat with latex or any other liquid sealing agents in order to pass the inspection specified in 4.6 shall not be permitted. It is the contractor's responsibility to recharge the cylinders discharged during inspection. Only cylinders, valves, hoses, fittings, and pull cables which have actually been used during the inspection are to be delivered with the lifeboats. This is not intended to restrict the cylinder assembly to the lifeboat on which it was tested. This requirement that only fully tested inflation gear be shipped with the lifeboat shall be verified by the cognizant Government representative.

4.7 Examination. Each completed lifeboat shall be carefully examined to determine conformance with the requirements of this specification and for such additional examination as may be considered necessary to insure suitability for the purpose intended. As a minimum, examination shall check for defects as specified in table II. No lifeboat shall be accepted by the Government until all discernible defects are corrected.

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:12Z
Check the source to verify that this is the currentversion before use.

TABLE II. Classification of defects.

Categories	Defects
Critical	
1	Coated cloth of the inflatable compartments damaged, not properly cured, not as specified.
2	Poor adhesion, improper vulcanizing.
3	Hose(s) damaged. End connections not torqued as specified. End connections cross-threaded.
4	Actuating "dee" ring for the lower tube cylinder valve not installed as specified.
5	Evidence of sewing in the seams of, or through the cloth of air chambers.
6	Valve pull-cable(s) damaged, or not connected as specified.
7	Topping-off valves not fully closed as specified.
8	Evidence of treating or swashing inflatable member with latex or other sealing agent.
9	Lifeboat not folded as specified.
10	Topping-off valves not installed as specified.
11	Inflation cylinders not fully charged to the weight and pressure specified.
12	Banding straps not installed as specified.
13	Painter rope missing, not attached, not as specified.
Major	
101	Hand pump and adapters not operable, not stowed as specified.
102	Boarding net damaged, not as specified.
103	Canopy damaged, not as specified.
104	Sea anchor "dee" ring not installed, not as specified.
105	Sea anchor(s) missing not installed or stowed as specified.
106	Cylinder holders not installed as specified.
107	Weight of the completed, packed lifeboat, ready for stowage exceeds maximum weight specified.
108	Material(s) used other than that specified.
109	Survival gear missing or not as specified.
110	Coated cloth of other than inflatable compartments damaged, not properly cured, not as specified.
111	Hull and gunwale tubes not joined as specified.
112	Ends of cross tubes not as specified.
113	Equipment incomplete, components not as specified, not stowed as specified.
114	Various "dee" rings will not hinge, material not as specified, not installed as specified.
115	Snap and lift fasteners damaged, not installed, not as specified.
116	Length and width of the finished lifeboat not within the tolerances specified.

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:12Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects. - Continued

Categories	Defects
Major (Continued)	
117	Hull, gunwale, cross tube, diameters not within the tolerances specified.
118	Unauthorized repairs or rework.
119	Tube seams, intersections not reinforced as specified.
120	Valve pull-cables not safety-wired as specified.
121	Survival gear bag missing, not as specified.
122	Oars damaged or missing, not as specified, not stowed as specified.
123	Lights not installed as specified, batteries missing.
124	Canopy closure fasteners not installed, not as specified.
125	Righting lines missing, not installed as specified, not as specified.
126	Radar reflective screen missing, not installed or stowed as specified, not as specified.
127	Metal parts not coated as specified.
Minor	
201	Floatable knife missing, not as specified.
202	Inner canopy vent holes not as specified.
203	Identification marking not legible, not as specified.
204	Packing of survival gear not as specified.
205	Instruction manuals missing, not as specified.
206	Caution tag or instruction lettering missing, not as specified.
207	Rope or line ends not fused or seized as specified.
208	Rain catcher tube construction not as specified, installation not as specified.
209	Inflatable floor not as specified.
210	Sealing clamps missing or not as specified.
211	Rescue line not as specified, not installed as specified.
212	Survival gear bag attachment lines missing, not installed as specified.
213	Sewing thread not as specified.
214	Life line not as specified, not installed as specified.
215	Closed container not sealed as specified.
216	Fasteners for stowage packet(s) not operable.

4.8 Test conditions. Unless otherwise specified herein, all tests on coated cloth required by this specification shall be conducted under the standard atmospheric conditions specified in FED-STD-191. Samples shall be conditioned in the standard atmosphere for at least 24 hours before testing. The tests required by 4.9 shall be conducted at an atmospheric pressure of 27 to 32 inches of mercury (Hg) and a temperature as specified by the applicable test of 4.9.

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:12Z
Check the source to verify that this is the current version before use.

4.8.1 Temperature correction. If the ambient temperature changes during the air pressure tests, adjustment shall be made on the basis of a change in pressure of 0.031 lb/in^2 per ^{o}F change in temperature.

4.8.2 Barometric pressure correction. If the barometric pressure changes during air pressure tests, adjustment shall be made on the basis of change in pressure of 0.49 lb/in^2 per inch Hg change in barometric pressure.

4.9 Tests.

4.9.1 Inflation. The lifeboat, complete in its container, shall be inflated in accordance with the instructions located on the end of the container to ascertain that the case will open properly and the inflation system performs properly. (The boat shall inflate to its design shape in not more than 30 seconds.) The lifeboat shall be allowed to stand for 1 hour, minimum, or until the relief valves have closed, to allow the air in the tubes to come to room temperature. Pressure readings shall be taken through the valves of each compartment of both upper and lower flotation tubes. (Pressure in any compartment shall not exceed 3.8 lb/in^2 when tested under the conditions specified in 4.8.) Failure of the case to open properly or failure of inflation system to operate properly shall be cause for rejection. Necessary precautions shall be taken to assure that only fully charged, tested cylinder assemblies for proper inflation at sea level are shipped with the lifeboats.

4.9.2 Overpressure leakage. Upon completion of the inflation test as specified in 4.9.1, the relief valves shall be blanked, and the pressure in the lifeboat shall be increased to 5 lb/in^2 and allowed to stand for at least 10 minutes. The pressure shall then be checked and readjusted, if necessary, to 5 lb/in^2. If the pressure at the end of an additional 20-minute period (minimum) is less than 4.6 lb/in^2, the lifeboat shall be rejected. Care shall be exercised not to introduce a differential pressure across the bulkheads during this test.

4.9.2.1 One compartment of the upper flotation tube and one compartment of the lower flotation tube shall be inflated by air to 3.8 lb/in^2 through the topping-off valves and allowed to stand for at least 10 minutes. The pressure shall then be checked and readjusted, if necessary, to 3.8 lb/in^2. If the pressure at the end of an additional 20-minute period (minimum) is less than 3.3 lb/in^2, the lifeboat shall be rejected. The two compartments under test shall then be deflated and the same test conducted on the remaining two compartments.

4.9.2.2 The inflatable floor shall be subjected to the test specified in 4.9.2. If the final corrected pressure in the inflatable floor is less than 4.6 lb/in^2, the floor shall be rejected. Upon completion of this test, the lifeboat shall immediately be subjected to the test specified in 4.9.3.

4.9.3 Working pressure and bulkhead. One compartment of the lower flotation tube and one compartment of the upper flotation tube shall be inflated by air to 2.0 lb/in^2 through the topping-off valves and allowed to stand for 1 hour. The pressure shall then be checked and readjusted as necessary to the original pressure of 2.0 lb/in^2. After standing 6 hours, the pressure shall be measured. The two compartments under test shall be deflated

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:12Z
Check the source to verify that this is the current version before use.

and the same test conducted on the remaining two compartments. If any compartment has a corrected pressure of less than 1.7 lb/in^2 after 6 hours, the lifeboat shall be rejected. The entire lifeboat and inflatable floor shall then be inflated by air to 2.0 lb/in^2 and pressure readjusted as above after 1 hour. After standing 24 hours, the pressure shall be measured. If the inflatable floor has a corrected pressure of less than 1.5 lb/in^2 after 24 hours, it shall be rejected. Depending upon the total number of repairs to the inflatable portions of the boat (excluding the inflatable floor), if any compartment has a corrected pressure after 24 hours or less than the minimum allowable pressures shown below, the lifeboat shall be rejected.

Number of repairs	Minimum allowable pressure after 24 hours (lb/in^2)
5 or less	1.5
6 - 10	1.55
11 - 15	1.6

4.9.4 Life line patch. Life line patches shall be tested for tensile strength in a fixture. The direction of the pull shall be perpendicular to the patch. This test is normally required only on lifeboats submitted for qualification inspection and first article inspection, but should be applied at any time that questionable quality is evident.

4.9.5 Lap seam strength. Each untaped 2-inch wide seam specimen shall be tested for seam strength in a tensile machine at a machine speed of 12 inches per minute. Supplementary to these samples, one additional specimen shall be prepared representing each day's production. At any convenient time, but in any case not less than once per week, these supplemental specimens shall be subjected for 24 hours to a dead-load of 40 pounds per inch of width while maintained at a temperature of 200°F ± 5°F. The seam shall show no sign of slippage.

4.9.6 Low temperature inflation. The lifeboat with all equipment and its container shall be conditioned in an environmental chamber as follows. The lifeboat shall be conditioned until the temperature is reduced to minus 22°F ± 2°F and then the lifeboat shall continue to be cold-soaked for 12 hours at this temperature. Thermocouples shall be installed on each inflation cylinder and in the interior of the folded boat to verify that the desired temperatures have been reached. The container may be closed or open. If conditioning is done with the container open, the container shall be closed and banded as specified in MIL-C-24491 prior to inflation of the lifeboat.

4.9.6.1 The lifeboat shall be inflated at an ambient temperature of minus 22°F ± 2°F by means of the normal actuating assembly. The lifeboat shall fully inflate to design shape with all canopy bows up in no more than 30 seconds. Each flotation tube compartment shall have an internal pressure of not less than 0.5 lb/in^2 at that time. Pressure readings shall be taken at the inflation (topping-off) valve for each compartment.

4.9.7 High temperature inflation. The lifeboat with all equipment and its container shall be conditioned in an environmental chamber as follows. The lifeboat shall be conditioned until the temperature is elevated to 160°F ± 5°F, and then the lifeboat shall continue to be heat-soaked for 12 hours at

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:12Z
Check the source to verify that this is the current version before use.

this temperature. Thermocouples shall be used to verify temperature as specified in 4.9.6, and the lifeboat shall be packed and inflated in the manner specified in 4.9.6, except that the ambient temperature shall be 160°F ± 5°F. The lifeboat shall fully inflate in no more than 30 seconds. All relief valves shall operate as specified in MIL-I-24490. At no time shall the pressure in any flotation compartment exceed 5.0 lb/in^2.

4.9.8 Drop. Lifeboat with all equipment, and packed in its container, shall be drop tested as specified in MIL-C-24491.

4.10 Inspection of packaging. Packaging, packing and marking shall be inspected for compliance with section 5 of this document.

5. PACKAGING

(The preparation for delivery requirements specified herein apply only for direct Government acquisition. For the extent of applicability of the preparation for delivery requirements of referenced documents listed in section 2, see 6.5.)

5.1 Packaging. Protective packaging and preparation of equipment to be furnished with each lifeboat shall be in accordance with 3.6.24, 3.6.25, and 3.7 herein.

5.2 Packing. Packing shall be levels A, B, or C, as specified in (see 6.2.1).

5.2.1 Levels A and B. Each container including the lifeboat shall be packed in an open wood crate conforming to MIL-C-52950, style and class selection at the contractor's option. Anchoring, closure, and strapping shall be in accordance with the appendix to the crate specification.

5.2.2 Level C. Lifeboats in the containers shall be packed in a manner which will insure acceptance by common carrier at the lowest rate and will afford protection against physical or mechanical damage during shipment from the supply source and warehouse storage after delivery. Containers, packing, or method of shipment shall comply with Uniform Freight or National Motor Freight Classification Rules and Regulations or other carrier rules as applicable to the mode of transportation. Method of packing shall facilitate handling and storage by fork lift trucks.

5.3 Marking. In addition to any special marking required by the contract or order (see 6.2.1), interior packages and shipping containers shall be marked in accordance with MIL-STD-129. The lifeboat, and any other included item with shelf life requirements, shall include the date of manufacture (month and year).

5.3.1 Hazardous material marking. Interior packages and items, including each lifeboat container and exterior shipping container, shall be marked and labelled to identify the compressed air, signal device kit, or any other hazardous material contained within the packed lifeboat. Markings and labels shall be in accordance with DOT Code of Federal Regulations, Title 49, CFR 171-178.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:12Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The lifeboat described herein is intended for shipboard installation to be used in the event the ship must be abandoned at sea.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number, and date of this specification.
(b) Level of packing required (see 5.2).
(c) Special marking required (see 5.3).

6.2.2 Data requirements. When this specification is used in a contract which incorporates a DD Form 1423 and invokes the provisions of 7-104.9(n) of the Defense Acquisition Regulation (DAR), the data requirements identified below will be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List (DD Form 1423) incorporated into the contract. When the provisions of DAR-7-104.9(n) are not invoked, the data specified below will be delivered by the contractor in accordance with the contract requirements. Deliverable data required by this specification is cited in the following paragraphs:

Paragraph	Data requirement	Applicable DID	Option
4.4.1	First article inspection report	DI-T-4902	---

(Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

6.2.2.1 The data requirements of 6.2.2 and any task in section 3, 4, or 5 of the specification required to be performed to meet a data requirement may be waived by the contracting/acquisition activity upon certification by the offeror that identical data were submitted by the offeror and accepted by the Government under a previous contract for identical item acquired to this specification. This does not apply to specific data which may be required for each contract, regardless of whether an identical item has been supplied previously (for example, test reports).

6.3 With respect to products requiring qualification, awards will be made only for products which are at the time set for opening of bids, qualified for inclusion in applicable Qualified Products List QPL-24489 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. The activity responsible for the Qualified Products list is the Naval Sea Systems Command, SEA 3112, Department of the Navy, Washington, DC 20362, and information pertaining to qualification of products may be obtained from that activity. Application for Qualification tests shall be made in accordance with "Provisions Governing Qualification SD-6" (see 6.3.1).

Source: https://assist.dla.mil -- Downloaded: 202640-19T22:12Z
Check the source to verify that this is the current version before use.

6.3.1 Copies of "Provisions Governing Qualification SD-6" may be obtained upon application to Commanding Officer, Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120.


6.4 First article inspection. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection as to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to reply on such production or test must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.5 Sub-contracted material and parts. The preparation for delivery requirements or referenced documents listed in section 2 do not apply when material and parts are acquired by the contractor for incorporation into the equipment and lose their separate identity when the equipment is shipped.

6.6 Changes from previous issue. Asterisks (*) are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 1940-N049)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:12Z
Check the source to verify that this is the current version before use.

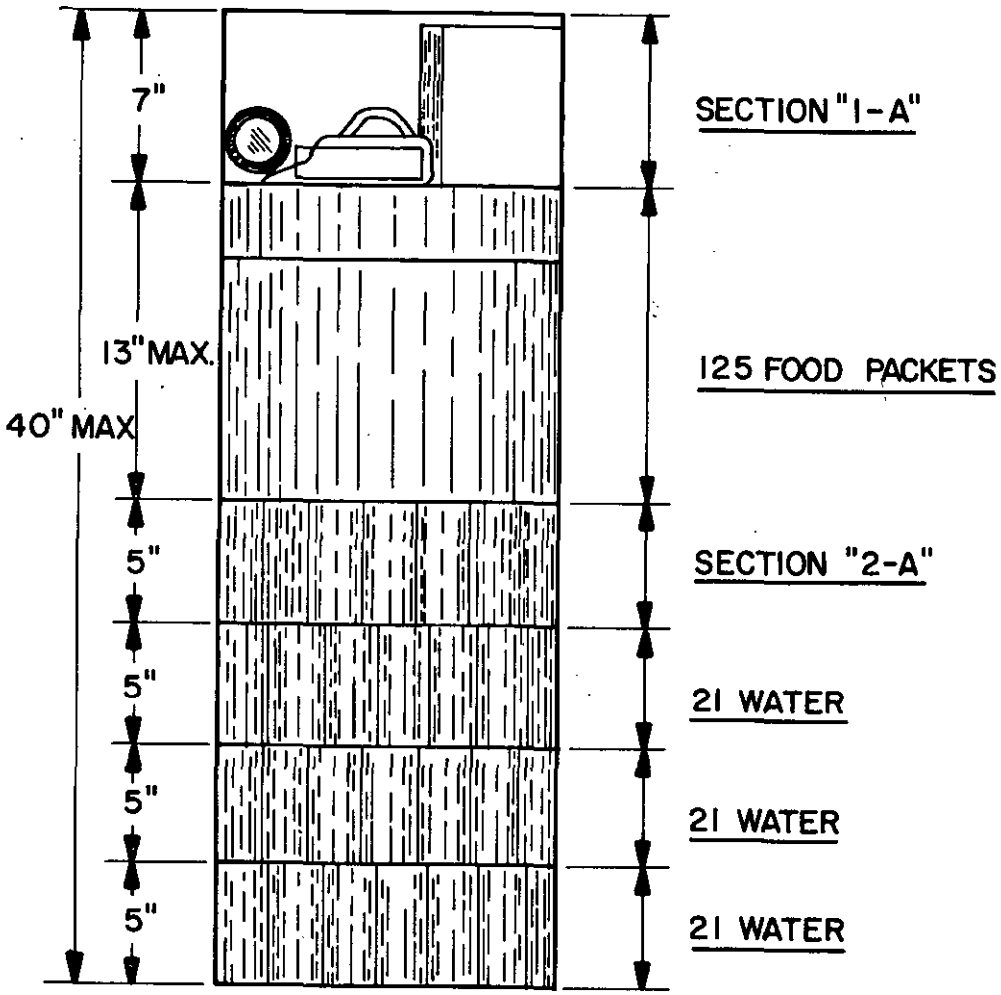


SURVIVAL GEAR BAG

SH 10670

FIGURE 1. Packing of survival gear bag.

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:12Z
Check the source to verify that this is the current version before use.

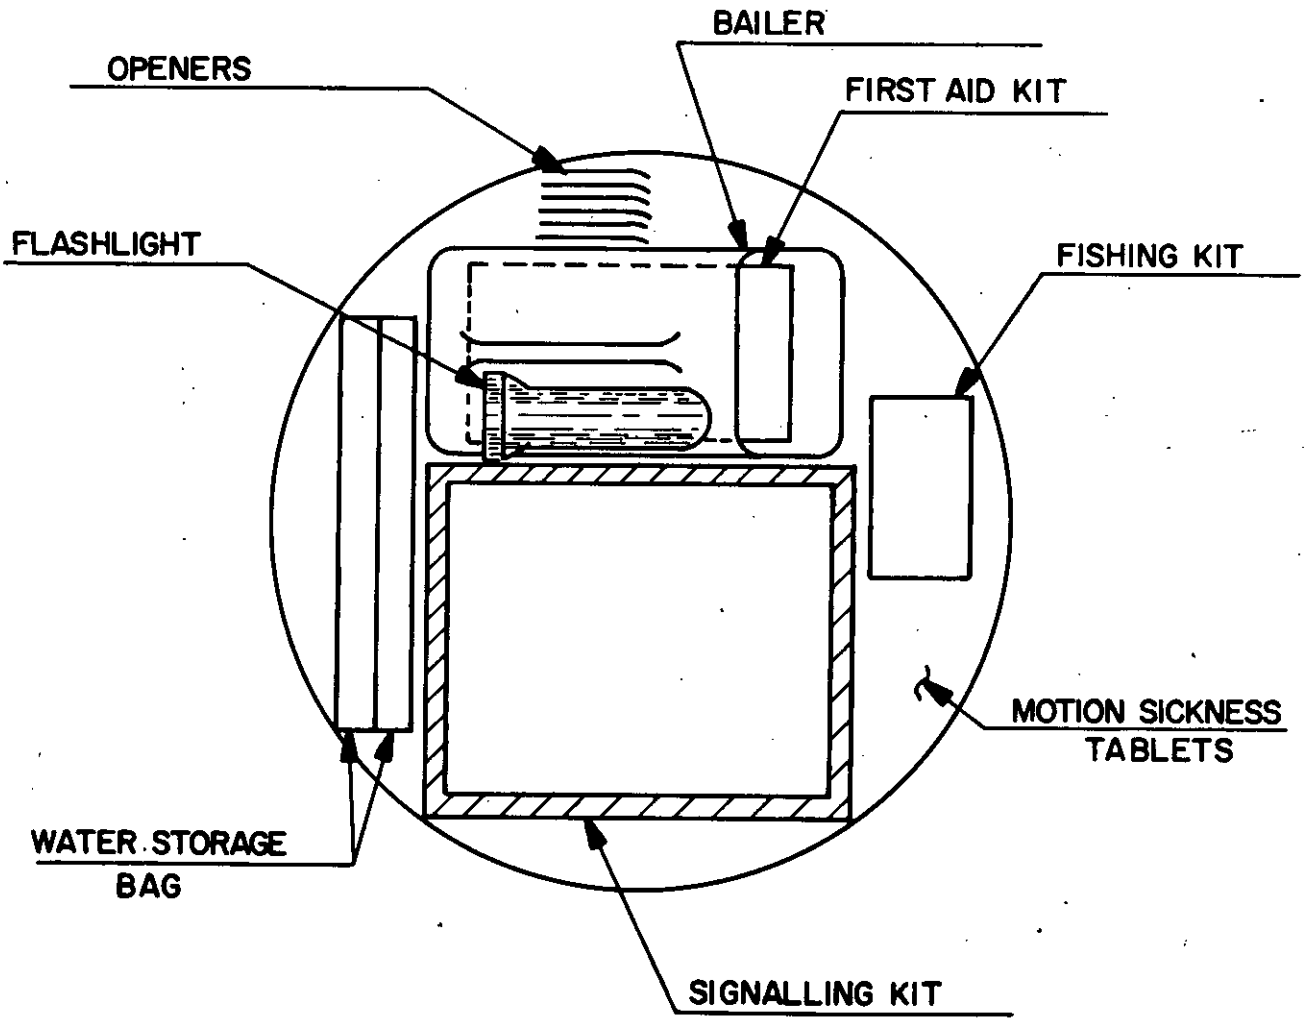


SECTION "1-A"

SH 10670

FIGURE 1. Packing of survival gear bag (section 1-A) (continued).

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:12Z
Check the source to verify that this is the current version before use.

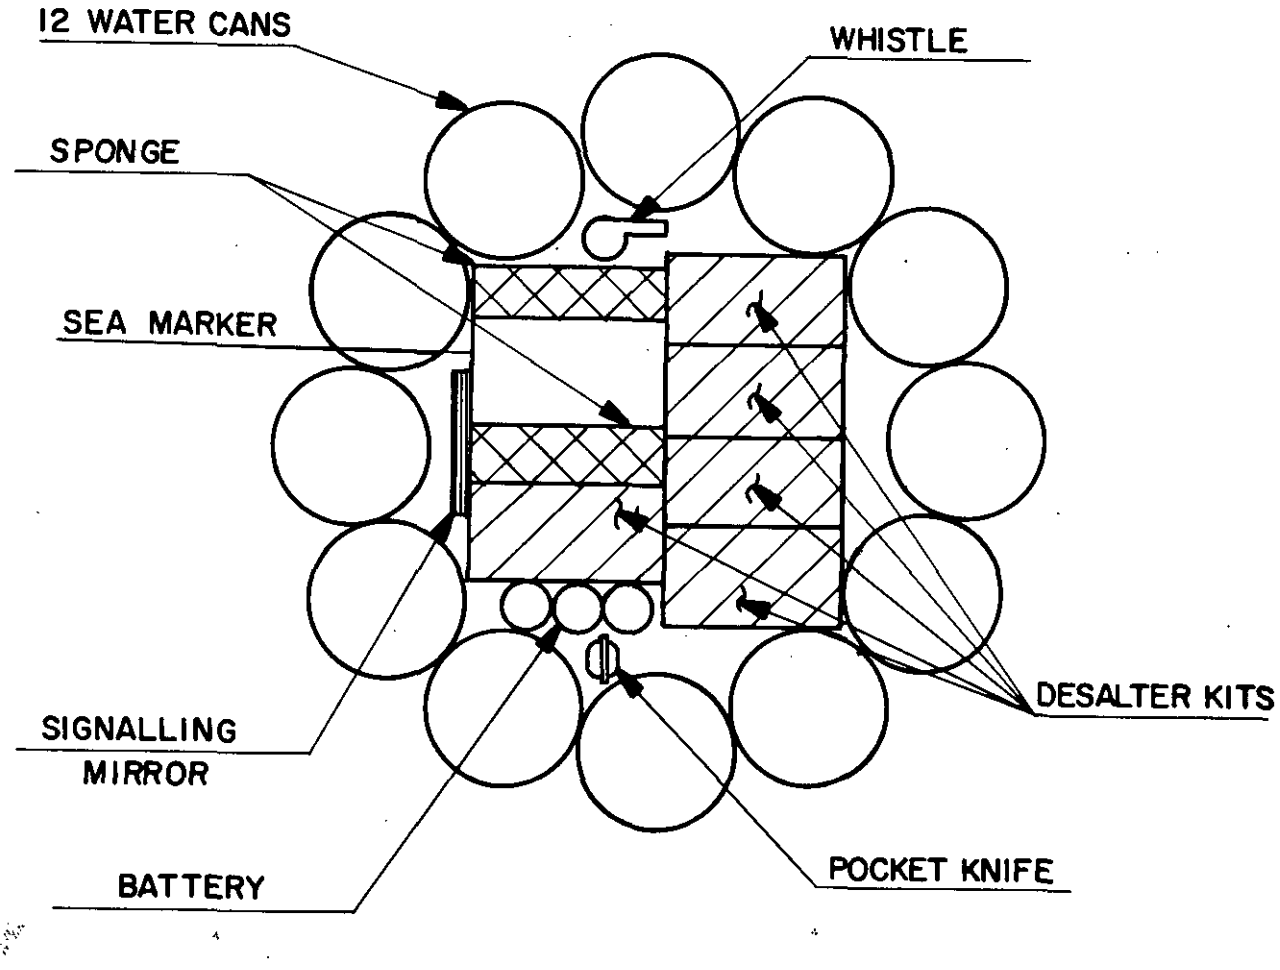

SH 10670

SECTION "2-A"

FIGURE 1. Packing of survival gear bag (section 2-A) (continued).

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:12Z
Check the source to verify that this is the current version before use.

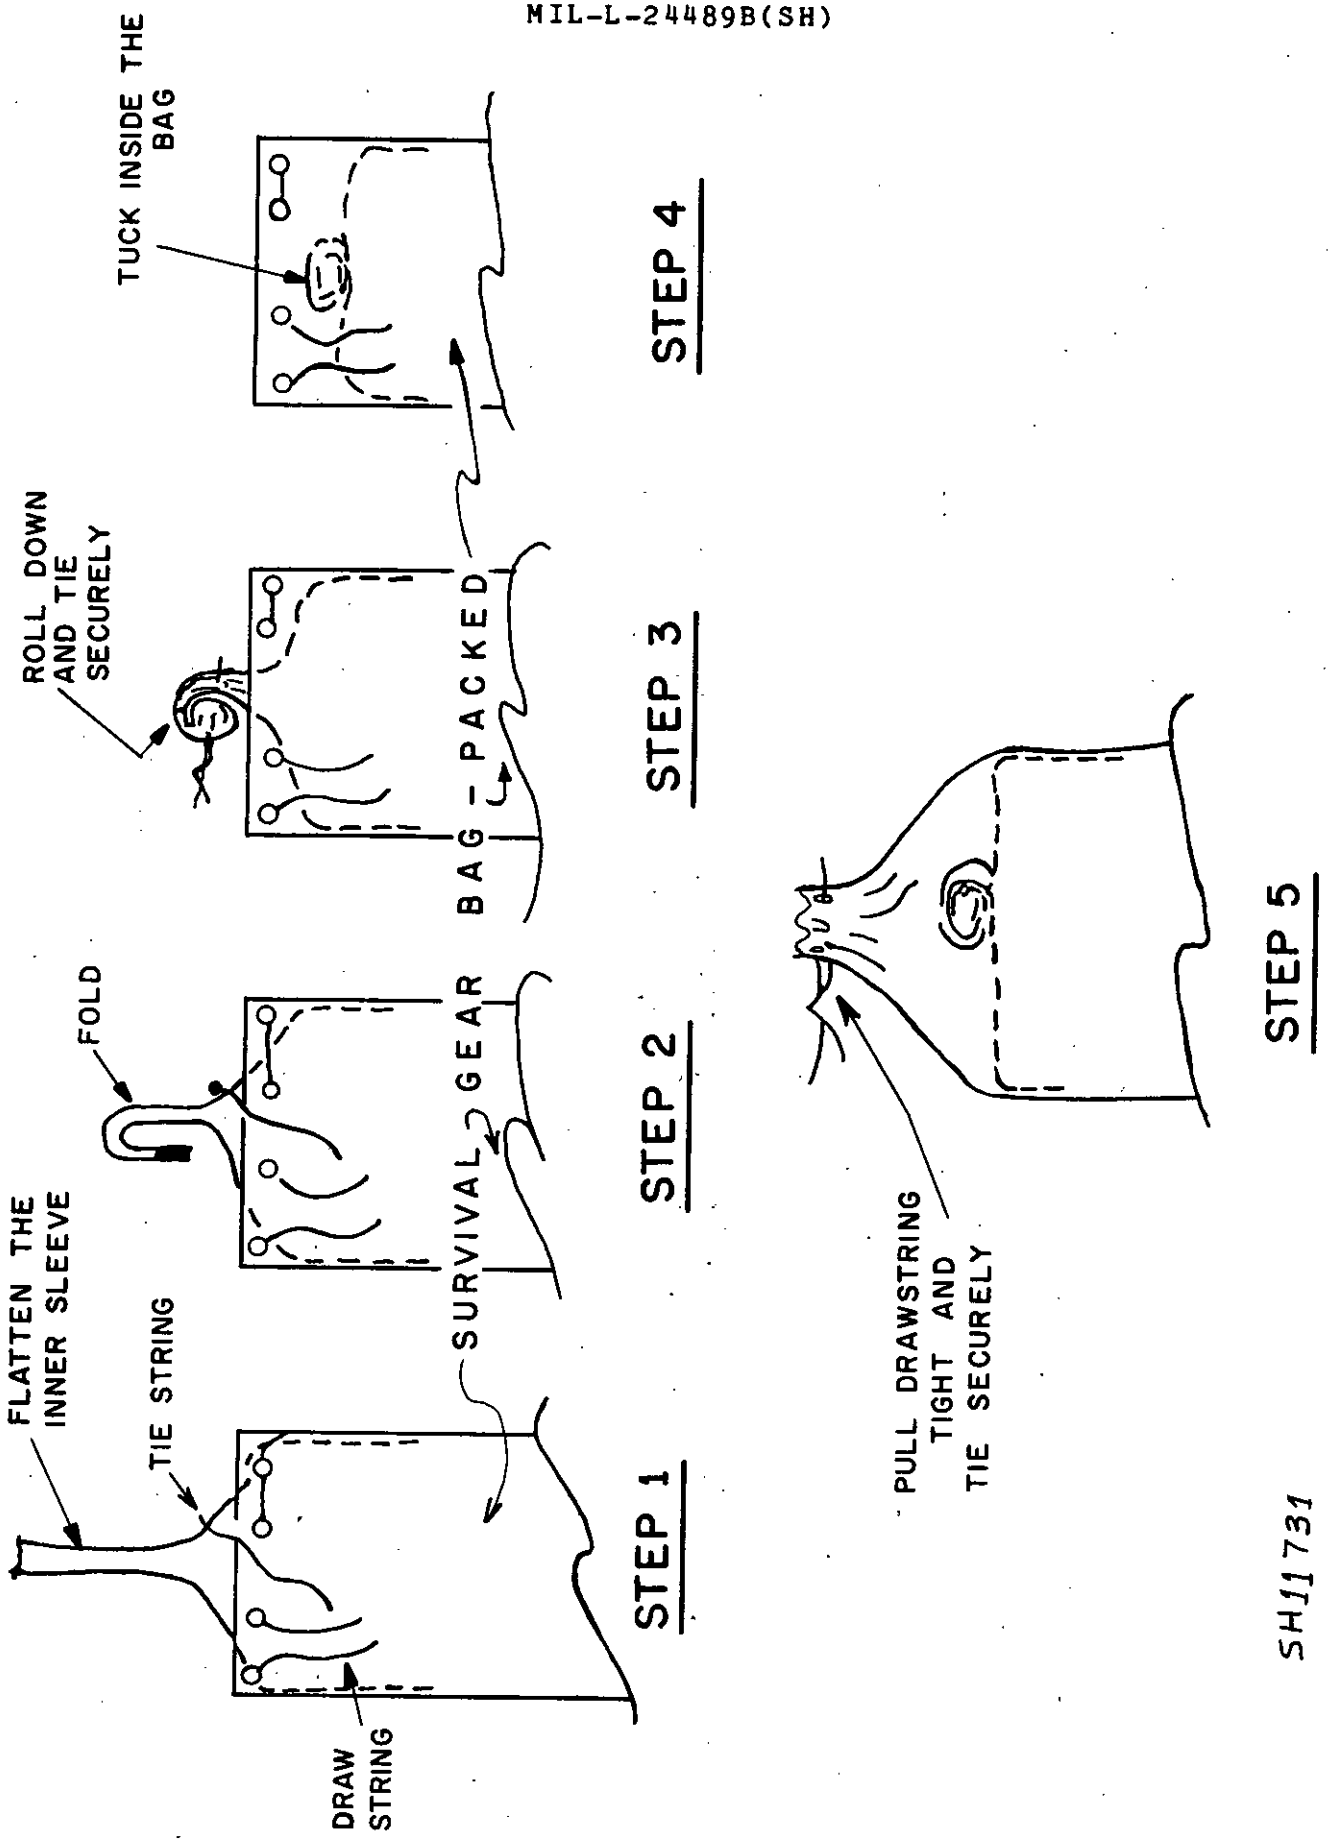


FIGURE 2. Closing the survival gear bag.

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:12Z
Check the source to verify that this is the current version before use.

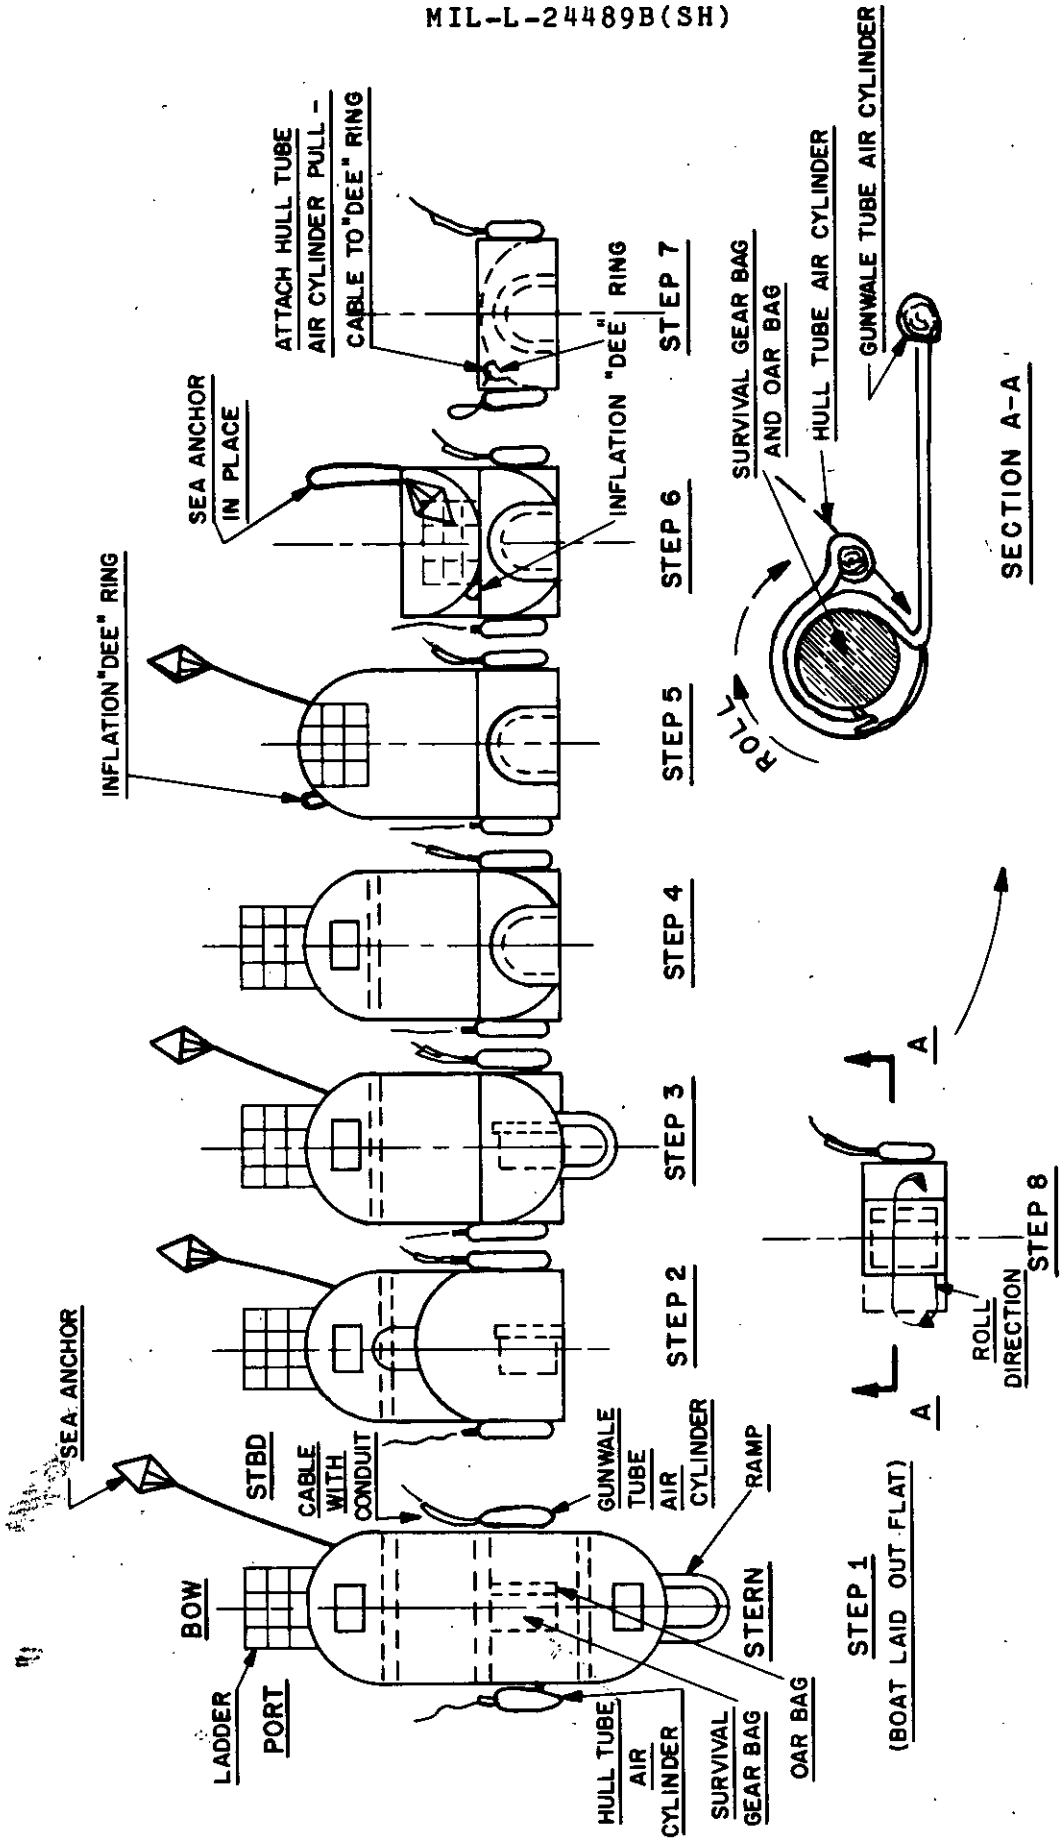


FIGURE 3. Folding instructions.

☆U.S. GOVERNMENT PRINTING OFFICE: 1981-703-023/2274

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:12Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-L-24489B(SH)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:12Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 3112)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:12Z
Check the source to verify that this is the current version before use.