NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


INCH-POUND
MIL-PRF-24236/11F
20 May 1992
SUPERSEDING
MIL-S-24236/11E
10 October 1979

PERFORMANCE SPECIFICATION SHEET

SWITCHES, THERMOSTATIC, (BIMETALLIC), TYPE I, HERMETICALLY SEALED, SINGLE POLE, SINGLE THROW (SPST), 1 AMPERE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-PRF-24236

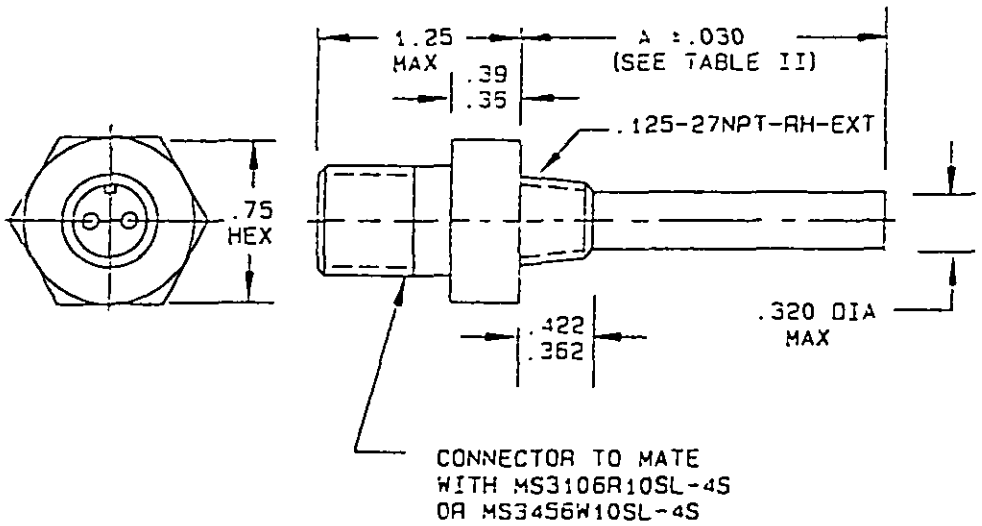


CONFIGURATION 1

FIGURE 1. Switches.


(F) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:30Z
Check the source to verify that this is the current version before use.

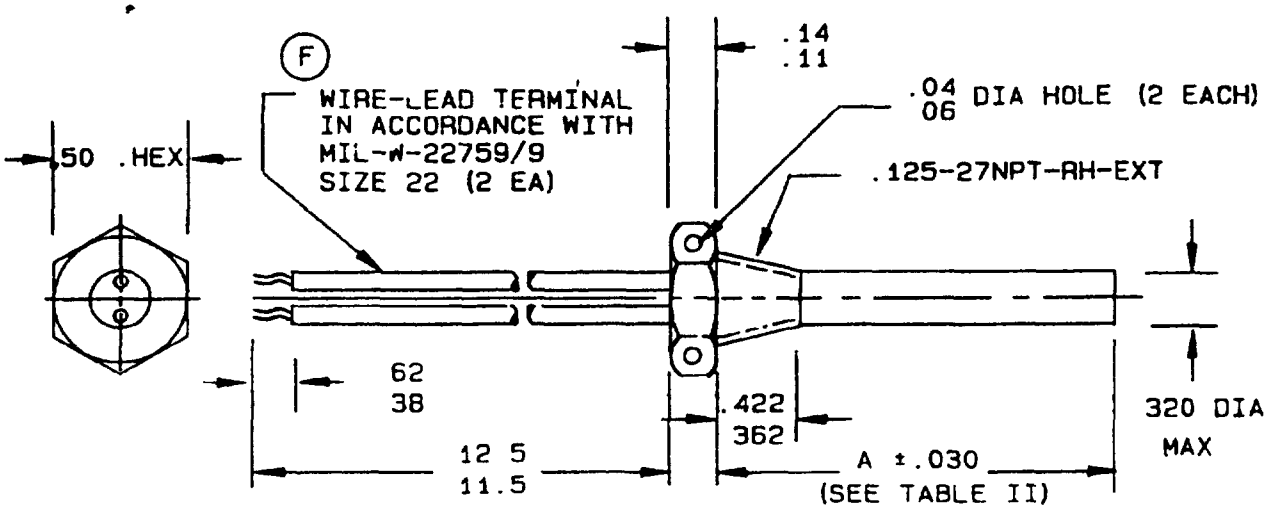


CONFIGURATION 2

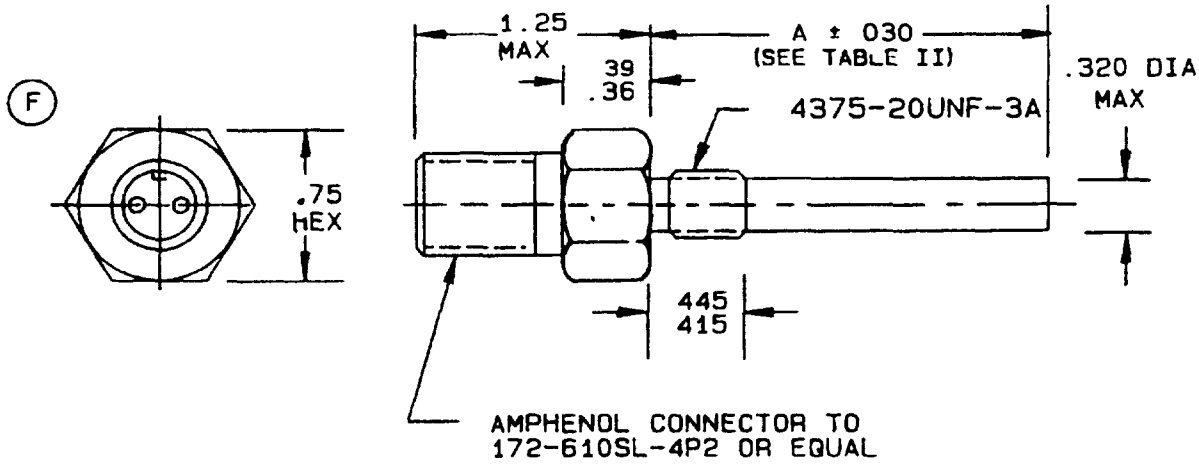

CONFIGURATION 3

FIGURE 1 Switches - Continued

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:30Z
Check the source to verify that this is the current version before use.

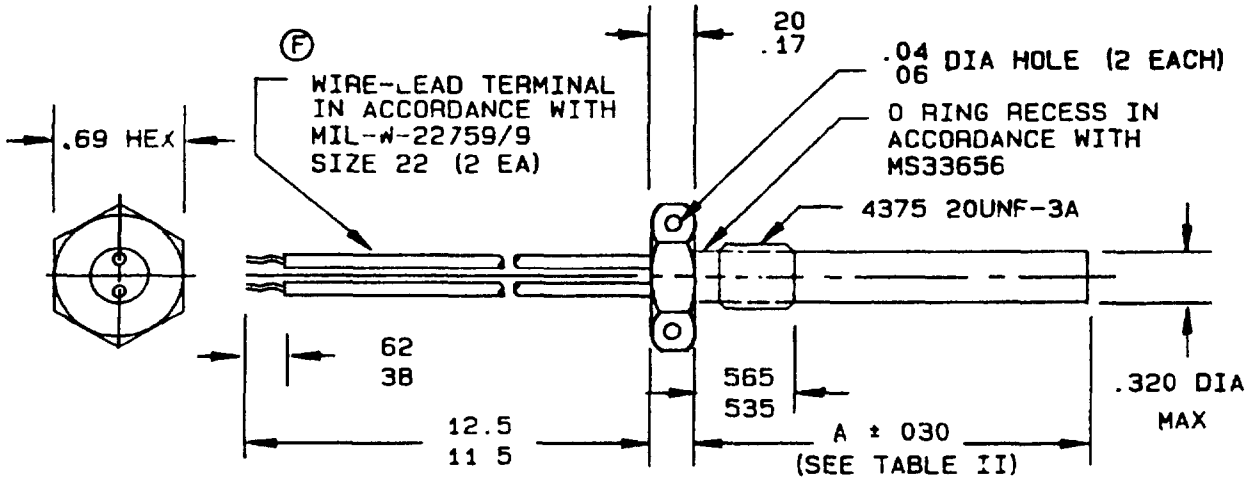

CONFIGURATION 4

Inches	mm	Inches	mm	Inches	mm	Inches	mm
030	.76	.20	5.1	.422	10 72	.62	15.7
.04	1.0	.320	8.13	.4375	11 112	.69	17 5
06	1 5	.36	9 1	445	11 30	75	19 0
11	2 8	362	9 19	50	12 7	1.25	31.8
125	3 18	.38	9.7	535	13 59	11 50	292 1
14	3 6	39	9.9	565	14 35	12 50	317 5
.17	4.3	415	10 54				

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only

FIGURE 1 Switches - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1 and tables I and II.

High temperature setting: 0°F to +350°F (see tables III and IV)

High temperature setting tolerance: ±8°F.

Low temperature setting: 30°F ±8°F below applicable high temperature setting

Class: 4, except vibration 5 to 2,000 Hz, 30 G

Mounting: See figure 1

Weight: 11 pound maximum (50 grams)

Torque.

Connector: 10 foot-pounds (configurations 1 and 3 only)

Switch mounting: 6 foot-pounds.

Electrical ratings: See table V

Endurance. See table V.

Marking: In accordance with MIL-S-24236

Part or Identifying Number (PIN). As shown in following example

EXAMPLE

M24236/11- A A CD

Specification sheet number

Configuration and contact action (see table I)

Probe length (see table II)

High temperature setting
(to nearest 25°F, table III)
(to nearest 5°F, table IV)

The above example identifies a switch of configuration 1 which opens on increasing temperature at 55°F ±8°F, closes on decreasing temperature at 30°F ±8° and has a probe length of 1.5 inches

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:30Z
Check the source to verify that this is the current version before use.

QUALIFICATION.

Group submission: See table VI

TABLE I. Configuration and contact action.

	Configuration				Contact action
	1	2	3	4	
Code - - - -	A	C	E	G	Open on increasing temperature
Code - - - -	B	D	F	H	Close on increasing temperature
Code - - - -	A	C	E	G	Close on decreasing temperature
Code - - - -	B	D	F	H	Open on decreasing temperature

TABLE II Probe length

Code	Dimension A, figure 1
	(Inches 1/)
A - - - - - - -	1 5 (38 10)
B - - - - - - -	2.0 (50 80)
C - - - - - - -	2 5 (63 50)
D - - - - - - -	3.0 (76 20)
E - - - - - - -	4 0 (101 60)

1/ Metric equivalents are shown in parentheses

TABLE III High temperature setting to the nearest 25°F.

Code	Temperature	Code	Temperature	Code	Temperature
	(°F)		(°F)		(°F)
A - - -	0	F - - -	125	L - - -	250
B - - -	25	G - - -	150	M - - -	275
C - - -	50	H - - -	175	N - - -	300
D - - -	75	J - - -	200	P - - -	325
E - - -	100	K - - -	225	Q - - -	350

Source: https://assist.dla.mil -- Downloaded: 202640-19T20:30Z
Check the source to verify that this is the current version before use.

TABLE IV High temperature setting to the nearest 5°F

Code	Temperature
	(°F)
A - - - -	-10
B - - - -	-5
C - - - -	0
D - - - -	+5
E - - - -	+10

TABLE V Electrical ratings and endurance

Load	Altitude			Life cycles
	Sea level		70,000 ft	
	28 V	115 V, 60 Hz	28 V	
	(Ampere)	(Ampere)	(Ampere)	
Resistive - - -	1.0	1 0	1 0	10,000
Inductive - - -	5	.5	5	10,000
Lamp - - - - -	2	2	2	10,000

TABLE VI. Group submission.

Configuration	Number of samples required	Tests	Extent of approval
1 and 2	3 each	Visual and mechanical examination, torque, vibration, shock, and seal	All 1/

1/ Qualification is based upon prior approval to MIL-S-24236/19

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:30Z
Check the source to verify that this is the current version before use.

Supersession data See table VII

TABLE VII Supersession data

Superseded military PIN	Superseding military PIN	Superseded military PIN	Superseding military PIN
M24236/11-01	M24236/11-ABFD	M24236/11-56	M24236/11-BBKB
-02	-AAEC	-57	-BBLA
-03	-AAFB	-58	-BBLE
-04	-AAGA	-59	-BBMD
-05	-AAGE	-60	-BBNC
-06	-AAHD	-61	-BBPB
-07	-AAJC	-62	-BBQA
-08	-AAKB	-63	-BBQE
-09	-AALA	-66	-ACEC
-10	-AALE	-67	-ACFB
-11	-AAMD	-68	-ACGA
-12	-AANC	-69	-ACGE
-13	-AATB	-70	-ACHD
-14	-AAQH	-71	-ACJC
-15	-AAQE	-72	-ACKB
-18	-BAEC	-73	-ACLA
-19	-BAFB	-74	-ACLE
-20	-BAGA	-75	-ACMD
-21	-BAGE	-76	-ACNC
-22	-BAHD	-77	-ACPB
-23	-BAJC	-78	-ACQA
-24	-BAKB	-79	-ACQE
-25	-BALA	-82	-BCEC
-26	-BALE	-83	-BCFB
-27	-BAMD	-84	-BCGA
-28	-BANC	-85	-BCGE
-29	-BATB	-86	-BCHD
-30	-BAQA	-87	-BCJC
-31	-BAQE	-88	-BCKB
-34	-ABEC	-89	-BCLA
-35	-ABFB	-90	-BCLE
-36	-ABGA	-91	-BCMD
-37	-ABGE	-92	-BCNC
-38	-ABHD	-93	-BCPB
-39	-ABJC	-94	-BCQA
-40	-ABAB	-95	-BCQE
-41	-ABLA	-98	-ADEC
-42	-ABLE	-99	-ADFB
-43	-ABND	-100	-ADGA
-44	-ABNC	-101	-ADGE
-45	-ABEB	-102	-ADHD
-46	-ABQA	-103	-ADJC
-47	-ABQE	-104	-ADKB
-50	-BBEC	-105	-ADLA
-51	-BBFB	-106	-ADLE
-52	-BBGA	-107	-ADMD
-53	-BBGE	-108	-ADNC
-54	-BBHD	-109	-ADPB
-55	-BBJC	-110	-ADQA

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:30Z
Check the source to verify that this is the current version before use.

TABLE VII Supersession data - Continued

Superseded military PIN	Superseding military PIN	Superseded military PIN	Superseding military PIN
M24236/11-111	M24236/11-ADQE	M24236/11-137	M24236/11-AELA
-114	-BDEC	-138	-AELE
-115	-BDFB	-139	-AEMD
-116	-BDGA	-140	-AENC
-117	-BDGE	-141	-AEPB
-118	-BDHD	-142	-AEQA
-119	-BDJC	-143	-AEQE
-120	-BDKB	-146	-BEEC
-121	-BDLA	-147	-BEFB
-122	-BDLE	-148	-BEGA
-123	-BDMB	-149	-BEGE
-124	-BDNC	-150	-BEHD
-125	-BDED	-151	-BEJC
-126	-BDQA	-152	-BEKB
-127	-BDQE	-153	-BELA
-130	-AEEC	-154	-BELE
-131	-AEFB	-155	-BEMD
-132	-AEGA	-156	-BENC
-133	-AEGE	-157	-BEPB
-134	-AEHD	-158	-BEQA
-135	-AEJC	-159	-BEQE
-136	-AEKB		

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - AR, MI
Navy - AS
Air Force - 99
DLA - ES

User activities
Army - AT, AV
Navy - MC, OS

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5930-1489)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:30Z
Check the source to verify that this is the current version before use.