INCH-POUND

MIL-PRF-24236/11G
22 January 2001
SUPERSEDING
MIL-S-24236/11F
20 May 1992

PERFORMANCE SPECIFICATION SHEET

# SWITCHES, THERMOSTATIC, (BIMETALLIC), TYPE I, HERMETICALLY SEALED, SINGLE POLE, SINGLE THROW (SPST), 1 AMPERE

This specification is approved for use by Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-PRF-24236.


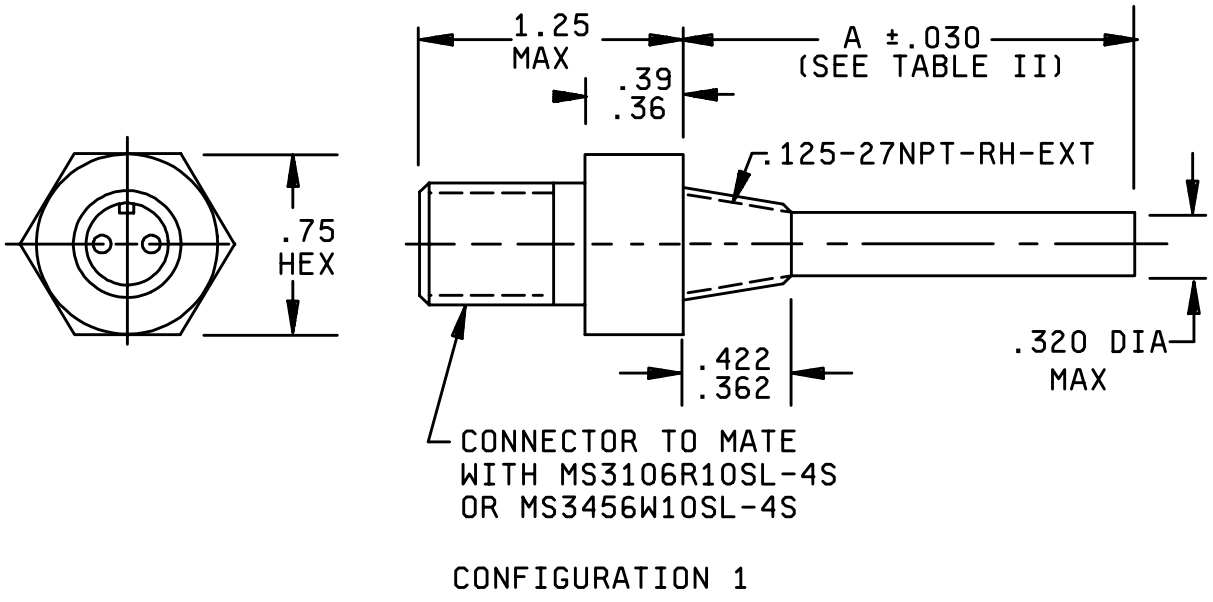




FIGURE 1. Switches.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:30Z
Check the source to verify that this is the current version before use.

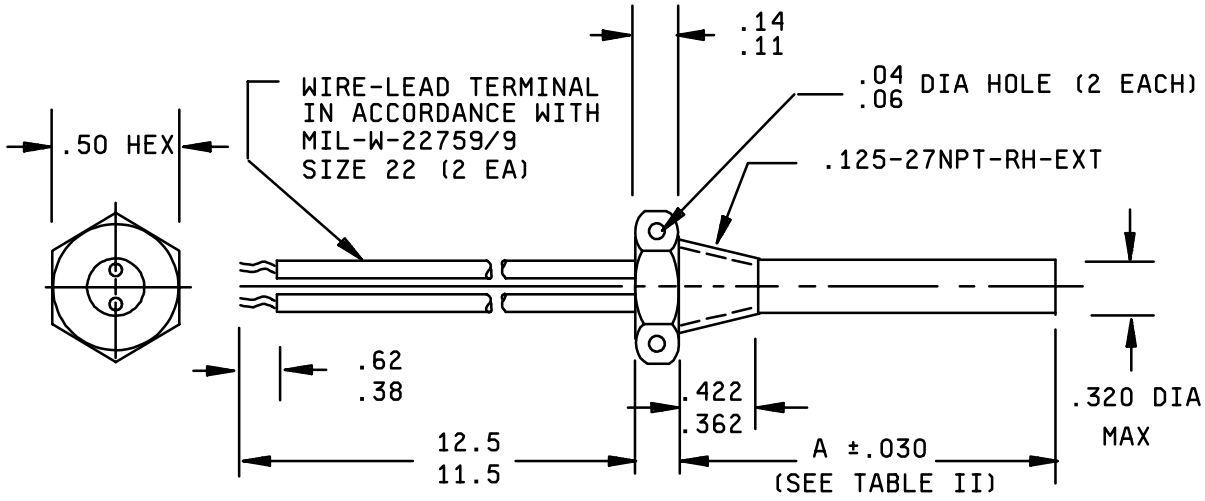


CONFIGURATION 2

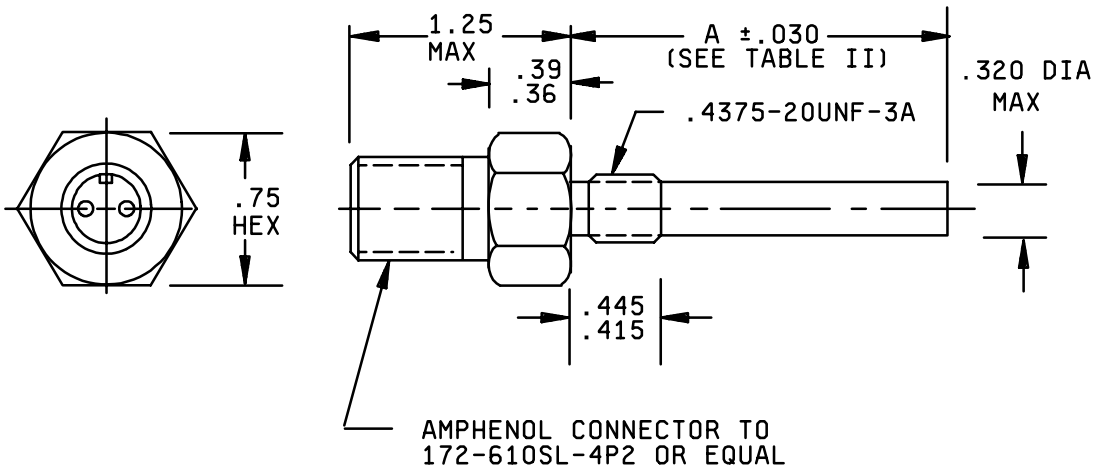



CONFIGURATION 3

FIGURE 1. Switches - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:30Z
Check the source to verify that this is the current version before use.

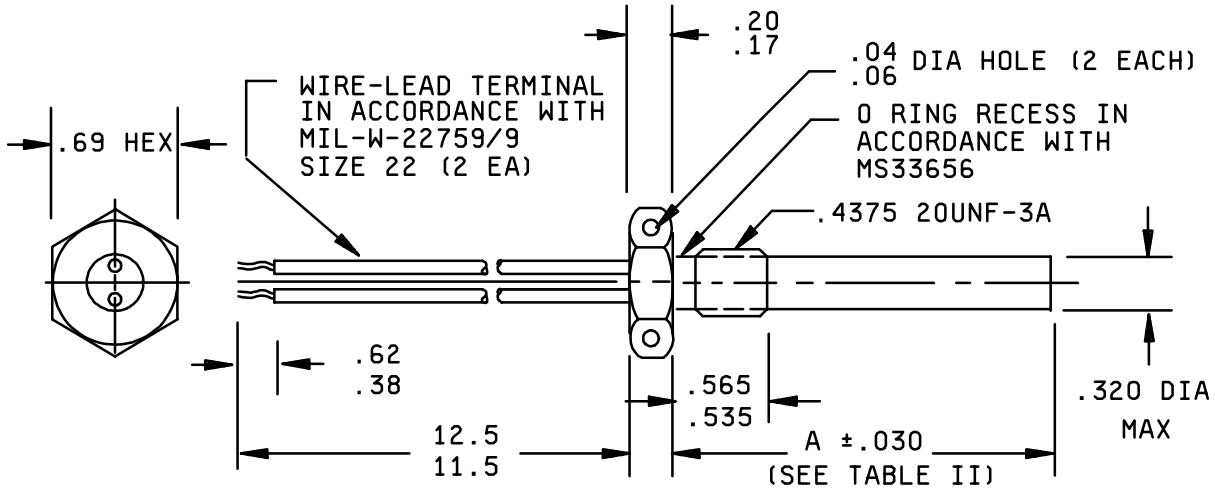


CONFIGURATION 4

| Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|
| .030 | .76 | .20 | 5.1 | .422 | 10.72 | .62 | 15.7 |
| .04 | 1.0 | .320 | 8.13 | .4375 | 11.112 | .69 | 17.5 |
| .06 | 1.5 | .36 | 9.1 | .445 | 11.30 | .75 | 19.0 |
| .11 | 2.8 | .362 | 9.19 | .50 | 12.7 | 1.25 | 31.8 |
| .125 | 3.18 | .38 | 9.7 | .535 | 13.59 | 11.50 | 292.1 |
| .14 | 3.6 | .39 | 9.9 | .565 | 14.35 | 12.50 | 317.5 |
| .17 | 4.3 | .415 | 10.54 | | | | |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Switches - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and tables I and II.

High temperature setting: 0°F to +350°F (see tables III and IV).

High temperature setting tolerance: ±8°F.

Low temperature setting: 30°F ±8°F below applicable high temperature setting.

Class: 4, except vibration 5 to 2,000 Hz, 30 G.

Mounting: See figure 1.

Weight: .11 pound maximum (50 grams).

Torque:

Connector: 10 foot-pounds (configurations 1 and 3 only).

Switch mounting: 6 foot-pounds.

Electrical ratings: See table V.

Endurance: See table V.

Marking: In accordance with MIL-PRF-24236.

Part or Identifying Number (PIN): As shown in following example:

EXAMPLE

M24236/11- A A CD

Specification sheet number

Configuration and contact action (see table I)

Probe length (see table II)

High temperature setting (to nearest 25°F, table III) (to nearest 5°F, table IV)

The above example identifies a switch of configuration 1 which opens on increasing temperature at 55°F ±8°F, closes on decreasing temperature at 30°F ±8° and has a probe length of 1.5 inches.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:30Z
Check the source to verify that this is the current version before use.

QUALIFICATION:

Group submission: See table VI.

TABLE I. Configuration and contact action.

| | Configuration | | | | Contact action |
|---|---|---|---|---|---|
| | 1 | 2 | 3 | 4 | |
| Code - - - - - - - - - - - | A | C | E | G | Open on increasing temperature |
| Code - - - - - - - - - - - | B | D | F | H | Close on increasing temperature |
| Code - - - - - - - - - - - | A | C | E | G | Close on decreasing temperature |
| Code - - - - - - - - - - - | B | D | F | H | Open on decreasing temperature |

TABLE II. Probe length.

| Code | Dimension A, figure 1 |
|---|---|
| | (Inches 1/) |
| A - - - - - - - - - - - - - - - - | 1.5 (38.10) |
| B - - - - - - - - - - - - - - - - | 2.0 (50.80) |
| C - - - - - - - - - - - - - - - - | 2.5 (63.50) |
| D - - - - - - - - - - - - - - - - | 3.0 (76.20) |
| E - - - - - - - - - - - - - - - - | 4.0 (101.60) |

1/ Metric equivalents are shown in parentheses.

TABLE III. High temperature setting to the nearest 25°F.

| Code | Temperature | Code | Temperature | Code | Temperature |
|---|---|---|---|---|---|
| | (°F) | | (°F) | | (°F) |
| A - - - - - - - - - | 0 | F - - - - - - - - - | 125 | L - - - - - - - - - | 250 |
| B - - - - - - - - - | 25 | G - - - - - - - - - | 150 | M - - - - - - - - - | 275 |
| C - - - - - - - - - | 50 | H - - - - - - - - - | 175 | N - - - - - - - - - | 300 |
| D - - - - - - - - - | 75 | J - - - - - - - - - | 200 | P - - - - - - - - - | 325 |
| E - - - - - - - - - | 100 | K - - - - - - - - - | 225 | Q - - - - - - - - - | 350 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:30Z
Check the source to verify that this is the current version before use.

TABLE IV. High temperature setting to the nearest 5°F.

| Code | Temperature |
|---|---|
| | (°F) |
| A - - - - - - - - - - - | -10 |
| B - - - - - - - - - - - | -5 |
| C - - - - - - - - - - - | 0 |
| D - - - - - - - - - - - | +5 |
| E - - - - - - - - - - - | +10 |

TABLE V. Electrical ratings and endurance.

| Load | Altitude | | | Life cycles |
|---|---|---|---|---|
| | Sea level | | 70,000 feet | |
| | 28 V | 115 V, 60 Hz | 28 V | |
| | (Ampere) | (Ampere) | (Ampere) | |
| Resistive - - - - - - - | 1.0 | 1.0 | 1.0 | 10,000 |
| Inductive - - - - - - - | .5 | .5 | .5 | 10,000 |
| Lamp - - - - - - - - - | .2 | .2 | .2 | 10,000 |

TABLE VI. Group submission.

| Configuration | Number of samples required | Tests | Extent of approval |
|---|---|---|---|
| 1 and 2 | 3 each | Visual and mechanical examination, torque, vibration, shock, and seal | All 1/ |

1/ Qualification is based upon prior approval to MIL-PRF-24236/19.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:30Z
Check the source to verify that this is the current version before use.

Supersession data: See table VII.

TABLE VII. Supersession data.

| Superseded military PIN | Superseding military PIN | Superseded military PIN | Superseding military PIN |
|---|---|---|---|
| M24236/11-01 | M24236/11-ABFD | M24236/11-56 | M24236/11-BBKB |
| -02 | -AAEC | -57 | -BBLA |
| -03 | -AAFB | -58 | -BBLE |
| -04 | -AAGA | -59 | -BBMD |
| -05 | -AAGE | -60 | -BBNC |
| -06 | -AAHD | -61 | -BBPB |
| -07 | -AAJC | -62 | -BBQA |
| -08 | -AAKB | -63 | -BBQE |
| -09 | -AALA | -66 | -ACEC |
| -10 | -AALE | -67 | -ACFB |
| -11 | -AAMD | -68 | -ACGA |
| -12 | -AANC | -69 | -ACGE |
| -13 | -AATB | -70 | -ACHD |
| -14 | -AAQH | -71 | -ACJC |
| -15 | -AAQE | -72 | -ACKB |
| -18 | -BAEC | -73 | -ACLA |
| -19 | -BAFB | -74 | -ACLE |
| -20 | -BAGA | -75 | -ACMD |
| -21 | -BAGE | -76 | -ACNC |
| -22 | -BAHD | -77 | -ACPB |
| -23 | -BAJC | -78 | -ACQA |
| -24 | -BAKB | -79 | -ACQE |
| -25 | -BALA | -82 | -BCEC |
| -26 | -BALE | -83 | -BCFB |
| -27 | -BAMD | -84 | -BCGA |
| -28 | -BANC | -85 | -BCGE |
| -29 | -BATB | -86 | -BCHD |
| -30 | -BAQA | -87 | -BCJC |
| -31 | -BAQE | -88 | -BCKB |
| -34 | -ABEC | -89 | -BCLA |
| -35 | -ABFB | -90 | -BCLE |
| -36 | -ABGA | -91 | -BCMD |
| -37 | -ABGE | -92 | -BCMC |
| -38 | -ABHD | -93 | -BCPB |
| -39 | -ABJC | -94 | -BCQA |
| -40 | -ABAB | -95 | -BCQE |
| -41 | -ABLA | -98 | -ADEC |
| -42 | -ABLE | -99 | -ADFB |
| -43 | -ABND | -100 | -ADGA |
| -44 | -ABNC | -101 | -ADGE |
| -45 | -ABEB | -102 | -ADHD |
| -46 | -ABQA | -103 | -ADJC |
| -47 | -ABQE | -104 | -ADKB |
| -50 | -BBEC | -105 | -ADLA |
| -51 | -BBFB | -106 | -ADLE |
| -52 | -BBGA | -107 | -ADMD |
| -53 | -BBGE | -108 | -ADNC |
| -54 | -BBHD | -109 | -ADPB |
| -55 | -BBJC | -110 | -ADQA |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:30Z
Check the source to verify that this is the current version before use.

ABLE VII. Supersession data - Continued.

| Superseded military PIN | Superseding military PIN | Superseded military PIN | Superseding military PIN |
|---|---|---|---|
| M24236/11-111 | M24236/11-ADQE | M24236/11-137 | M24236/11-AELA |
| -114 | -BDEC | -138 | -AELE |
| -115 | -BDFB | -139 | -AEMD |
| -116 | -BDGA | -140 | -AENC |
| -117 | -BDGE | -141 | -AEPB |
| -118 | -BDHD | -142 | -AEQA |
| -119 | -BDJC | -143 | -AEQE |
| -120 | -BDKB | -146 | -BEEC |
| -121 | -BDLA | -147 | -BEFB |
| -122 | -BDLE | -148 | -BEGA |
| -123 | -BDMB | -149 | -BEGE |
| -124 | -BDNC | -150 | -BEHD |
| -125 | -BDED | -151 | -BEJC |
| -126 | -BDQA | -152 | -BEKB |
| -127 | -BDQE | -153 | -BELA |
| -130 | -AEEC | -154 | -BELE |
| -131 | -AEFB | -155 | -BEMD |
| -132 | -AEGA | -156 | -BENC |
| -133 | -AEGE | -157 | -BEPB |
| -134 | -AEHD | -158 | -BEQA |
| -135 | -AEJC | -159 | -BEQE |
| -136 | -AEKB | | |

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AR, AT, AV, MI
Navy - AS, MC, OS
Air Force - 99

Preparing activity:
DLA - CC

(Project 5930-1714-03)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:30Z
Check the source to verify that this is the current version before use.