
INCH-POUND
MIL-PRF-24236/11K
14 February 2019
SUPERSEDING
MIL-PRF-24236/11J
2 February 2007

PERFORMANCE SPECIFICATION SHEET

SWITCHES, THERMOSTATIC, (BIMETALLIC), TYPE I, HERMETICALLY SEALED, SINGLE POLE, SINGLE THROW (SPST), 1 AMPERE

This specification is approved for use by Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet MIL-PRF-24236.

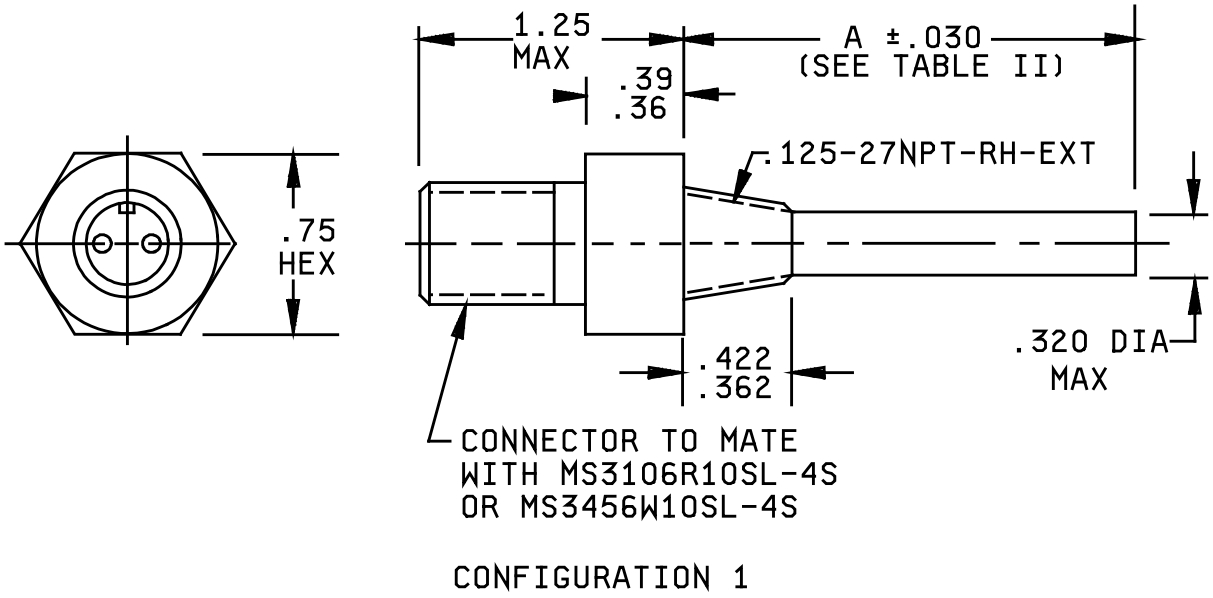


1. MS3106R10SL-4S details are found in SAE-AS31061.
2. MS3456W10SL-4S details are found in SAE-AS34561.

FIGURE 1. Switches.


AMSC N/A

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:29Z
Check the source to verify that this is the current version before use.

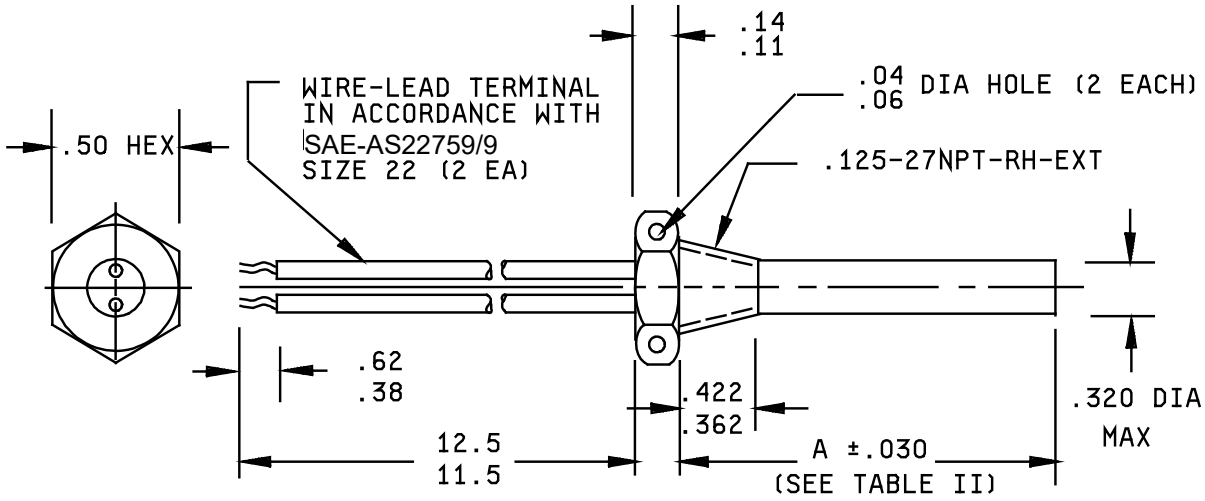


CONFIGURATION 2

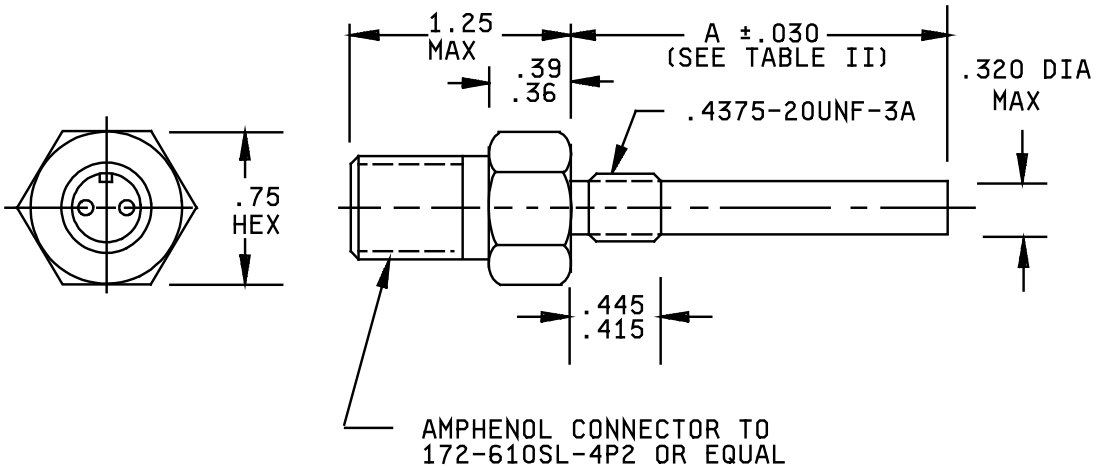

CONFIGURATION 3

FIGURE 1. Switches - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:29Z
Check the source to verify that this is the current version before use.

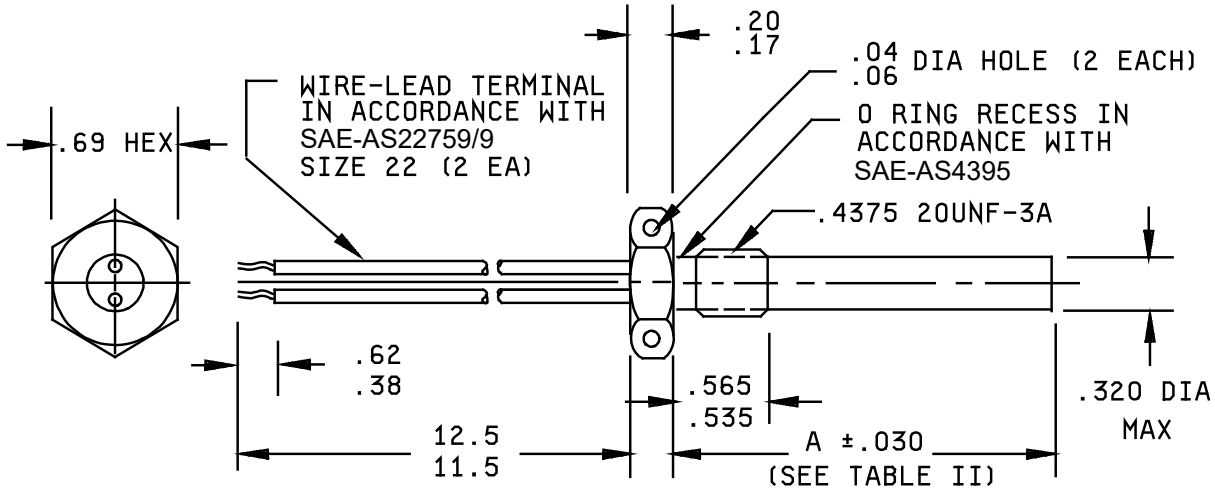

CONFIGURATION 4

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.030	.76	.20	5.1	.422	10.72	.62	15.7
.04	1.0	.320	8.13	.4375	11.112	.69	17.5
.06	1.5	.36	9.1	.445	11.30	.75	19.0
.11	2.8	.362	9.19	.50	12.7	1.25	31.8
.125	3.18	.38	9.7	.535	13.59	11.50	292.1
.14	3.6	.39	9.9	.565	14.35	12.50	317.5
.17	4.3	.415	10.54				

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. MS3456R10SL-4S and MS3456W10SL-4S details are found in SAE-AS34561.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:29Z
Check the source to verify that this is the current version before use.

FIGURE 1. Switches - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and tables I and II.

High temperature setting: 0°F to +350°F (see tables III and IV).

High temperature setting tolerance: ±8°F.

Low temperature setting: 30°F ±8°F below applicable high temperature setting.

Class: 4, except vibration 5 to 2,000 Hz, 30 G.

Mounting: See figure 1.

Weight: .11 pound maximum (50 grams).

Torque:

Connector: 10 foot-pounds (configurations 1 and 3 only).

Switch mounting: 6 foot-pounds.

Initial contact resistance shall not exceed 50 milliohms; following endurance test, contact resistance shall not exceed 100 milliohms.

Electrical ratings: See table V.

Endurance: See table V.

Marking: In accordance with MIL-PRF-24236.

Part or Identifying Number (PIN): As shown in following example:

EXAMPLE

M24236/11- A A CD

Specification sheet number

Configuration and contact action (see table I)

Probe length (see table II)

High temperature setting (to nearest 25°F, table III) (to nearest 5°F, table IV)

The above example identifies a switch of configuration 1 which opens on increasing temperature at 55°F ±8°F, closes on decreasing temperature at 30°F ±8° and has a probe length of 1.5 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:29Z
Check the source to verify that this is the current version before use.

QUALIFICATION:

Group submission: See table VI.

TABLE I. Configuration and contact action.

	Configuration				Contact action
	1	2	3	4	
Code - - - - - - - - - - -	A	C	E	G	Open on increasing temperature
Code - - - - - - - - - - -	B	D	F	H	Close on increasing temperature
Code - - - - - - - - - - -	A	C	E	G	Close on decreasing temperature
Code - - - - - - - - - - -	B	D	F	H	Open on decreasing temperature

TABLE II. Probe length.

Code	Dimension A, figure 1
	(Inches 1/)
A - - - - - - - - - - - - - - -	1.5 (38.10)
B - - - - - - - - - - - - - - -	2.0 (50.80)
C - - - - - - - - - - - - - - -	2.5 (63.50)
D - - - - - - - - - - - - - - -	3.0 (76.20)
E - - - - - - - - - - - - - - -	4.0 (101.60)

1/ Metric equivalents are shown in parentheses.

TABLE III. High temperature setting to the nearest 25°F.

Code	Temperature	Code	Temperature	Code	Temperature
	(°F)		(°F)		(°F)
A - - - - - - - - -	0	F - - - - - - - - -	125	L - - - - - - - - -	250
B - - - - - - - - -	25	G - - - - - - - - -	150	M - - - - - - - - -	275
C - - - - - - - - -	50	H - - - - - - - - -	175	N - - - - - - - - -	300
D - - - - - - - - -	75	J - - - - - - - - -	200	P - - - - - - - - -	325
E - - - - - - - - -	100	K - - - - - - - - -	225	Q - - - - - - - - -	350

TABLE IV. High temperature setting to the nearest 5°F.

Code	Temperature
	(°F)
A - - - - - - - - - - -	-10
B - - - - - - - - - - -	-5
C - - - - - - - - - - -	0
D - - - - - - - - - - -	+5
E - - - - - - - - - - -	+10

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:29Z
Check the source to verify that this is the current version before use.

TABLE V. Electrical ratings and endurance.

Load	Altitude			Life cycles
	Sea level		70,000 feet	
	28 V	115 V, 60 Hz	28 V	
	(Ampere)	(Ampere)	(Ampere)	
Resistive - - - - - - -	1.0	1.0	1.0	10,000
Inductive - - - - - - -	.5	.5	.5	10,000
Lamp - - - - - - - - -	.2	.2	.2	10,000

TABLE VI. Group submission.

Configuration	Number of samples required	Tests	Extent of approval
1 and 2	3 each	Visual and mechanical examination, torque, vibration, shock, and seal	All 1/

1/ Qualification is based upon prior approval to MIL-PRF-24236/19.

Supersession data: See table VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:29Z
Check the source to verify that this is the current version before use.

TABLE VII. Supersession data.

Superseded military PIN	Superseding military PIN	Superseded military PIN	Superseding military PIN
M24236/11-01	M24236/11-ABFD	M24236/11-56	M24236/11-BBKB
-02	-AAEC	-57	-BBLA
-03	-AAFB	-58	-BBLE
-04	-AAGA	-59	-BBMD
-05	-AAGE	-60	-BBNC
-06	-AAHD	-61	-BBPB
-07	-AAJC	-62	-BBQA
-08	-AAKB	-63	-BBQE
-09	-AALA	-66	-ACEC
-10	-AALE	-67	-ACFB
-11	-AAMD	-68	-ACGA
-12	-AANC	-69	-ACGE
-13	-AATB	-70	-ACHD
-14	-AAQH	-71	-ACJC
-15	-AAQE	-72	-ACKB
-18	-BAEC	-73	-ACLA
-19	-BAFB	-74	-ACLE
-20	-BAGA	-75	-ACMD
-21	-BAGE	-76	-ACNC
-22	-BAHD	-77	-ACPB
-23	-BAJC	-78	-ACQA
-24	-BAKB	-79	-ACQE
-25	-BALA	-82	-BCEC
-26	-BALE	-83	-BCFB
-27	-BAMD	-84	-BCGA
-28	-BANC	-85	-BCGE
-29	-BATB	-86	-BCHD
-30	-BAQA	-87	-BCJC
-31	-BAQE	-88	-BCKB
-34	-ABEC	-89	-BCLA
-35	-ABFB	-90	-BCLE
-36	-ABGA	-91	-BCMD
-37	-ABGE	-92	-BCMC
-38	-ABHD	-93	-BCPB
-39	-ABJC	-94	-BCQA
-40	-ABAB	-95	-BCQE
-41	-ABLA	-98	-ADEC
-42	-ABLE	-99	-ADFB
-43	-ABND	-100	-ADGA
-44	-ABNC	-101	-ADGE
-45	-ABEB	-102	-ADHD
-46	-ABQA	-103	-ADJC
-47	-ABQE	-104	-ADKB
-50	-BBEC	-105	-ADLA
-51	-BBFB	-106	-ADLE
-52	-BBGA	-107	-ADMD
-53	-BBGE	-108	-ADNC
-54	-BBHD	-109	-ADPB
-55	-BBJC	-110	-ADQA

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:29Z
Check the source to verify that this is the current version before use.

TABLE VII. Supersession data - Continued.

Superseded military PIN	Superseding military PIN	Superseded military PIN	Superseding military PIN
M24236/11-111	M24236/11-ADQE	M24236/11-137	M24236/11-AELA
-114	-BDEC	-138	-AELE
-115	-BDFB	-139	-AEMD
-116	-BDGA	-140	-AENC
-117	-BDGE	-141	-AEPB
-118	-BDHD	-142	-AEQA
-119	-BDJC	-143	-AEQE
-120	-BDKB	-146	-BEEC
-121	-BDLA	-147	-BEFB
-122	-BDLE	-148	-BEGA
-123	-BDMB	-149	-BEGE
-124	-BDNC	-150	-BEHD
-125	-BDED	-151	-BEJC
-126	-BDQA	-152	-BEKB
-127	-BDQE	-153	-BELA
-130	-AEEC	-154	-BELE
-131	-AEFB	-155	-BEMD
-132	-AEGA	-156	-BENC
-133	-AEGE	-157	-BEPB
-134	-AEHD	-158	-BEQA
-135	-AEJC	-159	-BEQE
-136	-AEKB		

Referenced Documents:

MIL-PRF-24236 MIL-PRF-24236/19 SAE-AS34561
SAE-AS22759/9 SAE-AS4395 SAE-AS31061

Changes from previous revision. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AR, AT, AV, MI
Navy - AS, MC, OS

Preparing activity:
DLA - CC

(Project 5930-2018-074)

The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:29Z
Check the source to verify that this is the current version before use.