PERFORMANCE SPECIFICATION SHEET

SWITCHES, THERMOSTATIC, (BIMETALLIC), TYPE I,
HERMETICALLY SEALED, SINGLE POLE, SINGLE THROW
(SPST), 1 AMPEREAND LOW LEVEL

This amendment forms a part of MIL-PRF-24236/13G, dated 22 January 2001, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 2

Figure 1, Delete Configuration 2 and replace with the following.

"

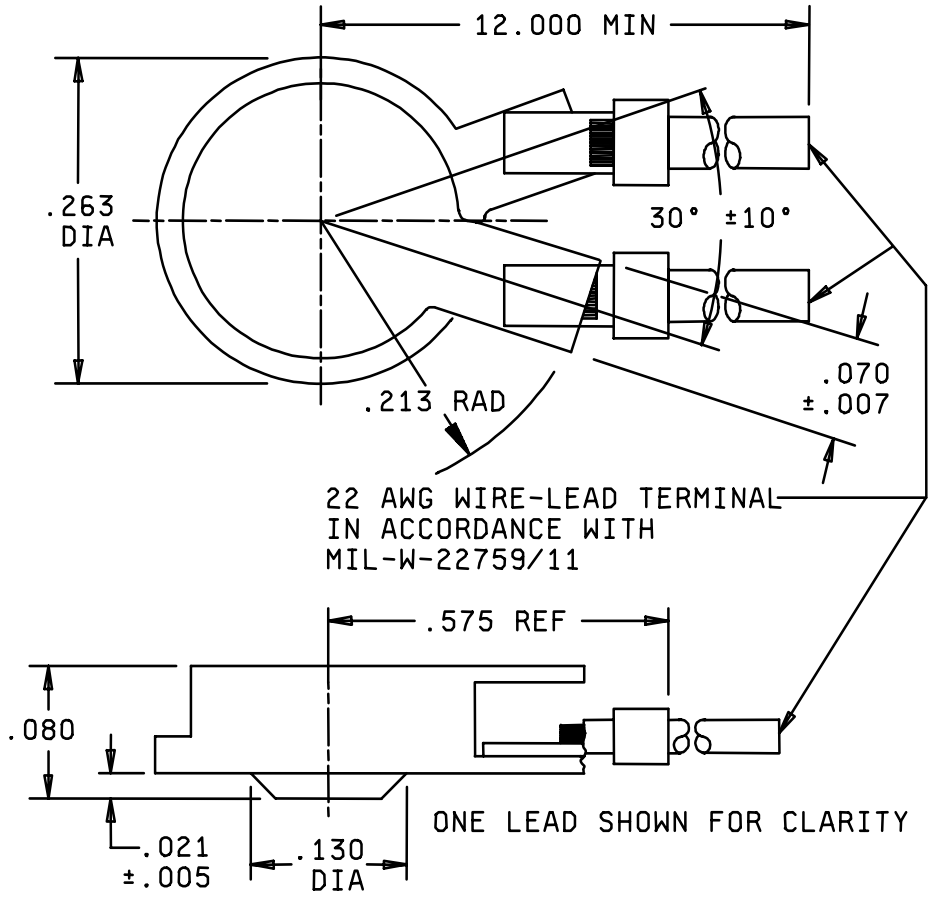

CONFIGURATION 2

"

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:30Z
Check the source to verify that this is the current version before use.

High temperature setting: Delete “365°” and substitute “350°”.

Class: Delete and substitute:

“Class: 4, except vibration 10 to 2,000 Hz, 30 G.
Notes:
1. Devices with open on temperature rise should not be subjected to vibration while at temperatures of 75°F or more below the opening temperature.
2. Devices with close on temperature rise should not be subjected to vibration while at temperatures of 75°F or more above the opening temperature. “

Sea level: add the following
“or 400 volts ac for 1 minute."

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AR, AT, AV, MI
Navy - AS, MC, OS
Air Force - 99

Preparing activity:
DLA - CC

(Project 5930-1775-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:30Z
Check the source to verify that this is the current version before use.