NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND
MIL-PRF-24236/20H
27 April 1990
SUPERSEDING
MIL-S-24236/20G
7 January 1987

PERFORMANCE SPECIFICATION SHEET

SWITCHES, THERMOSTATIC, (BIMETALLIC), (SUBMINIATURE), TYPE I, HERMETICALLY SEALED, SINGLE POLE, SINGLE THROW (SPST), 2 AMPERES AND LOW LEVEL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-PRF-24236

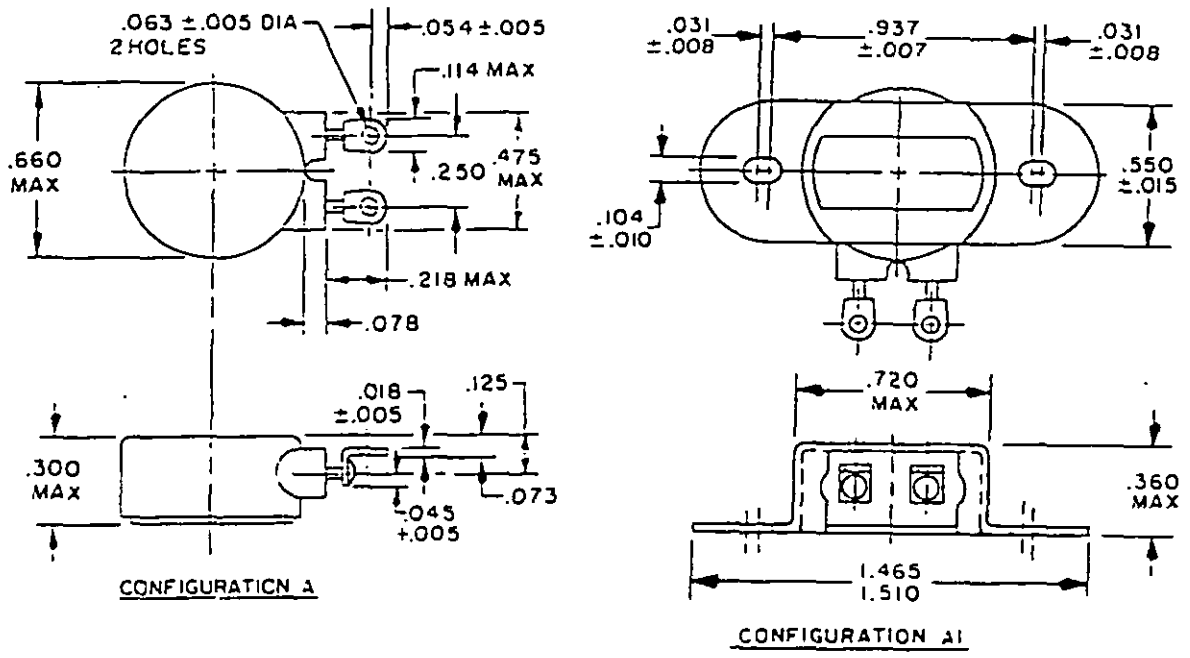


FIGURE 1. Switches.

(H) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:32Z
Check the source to verify that this is the current version before use.

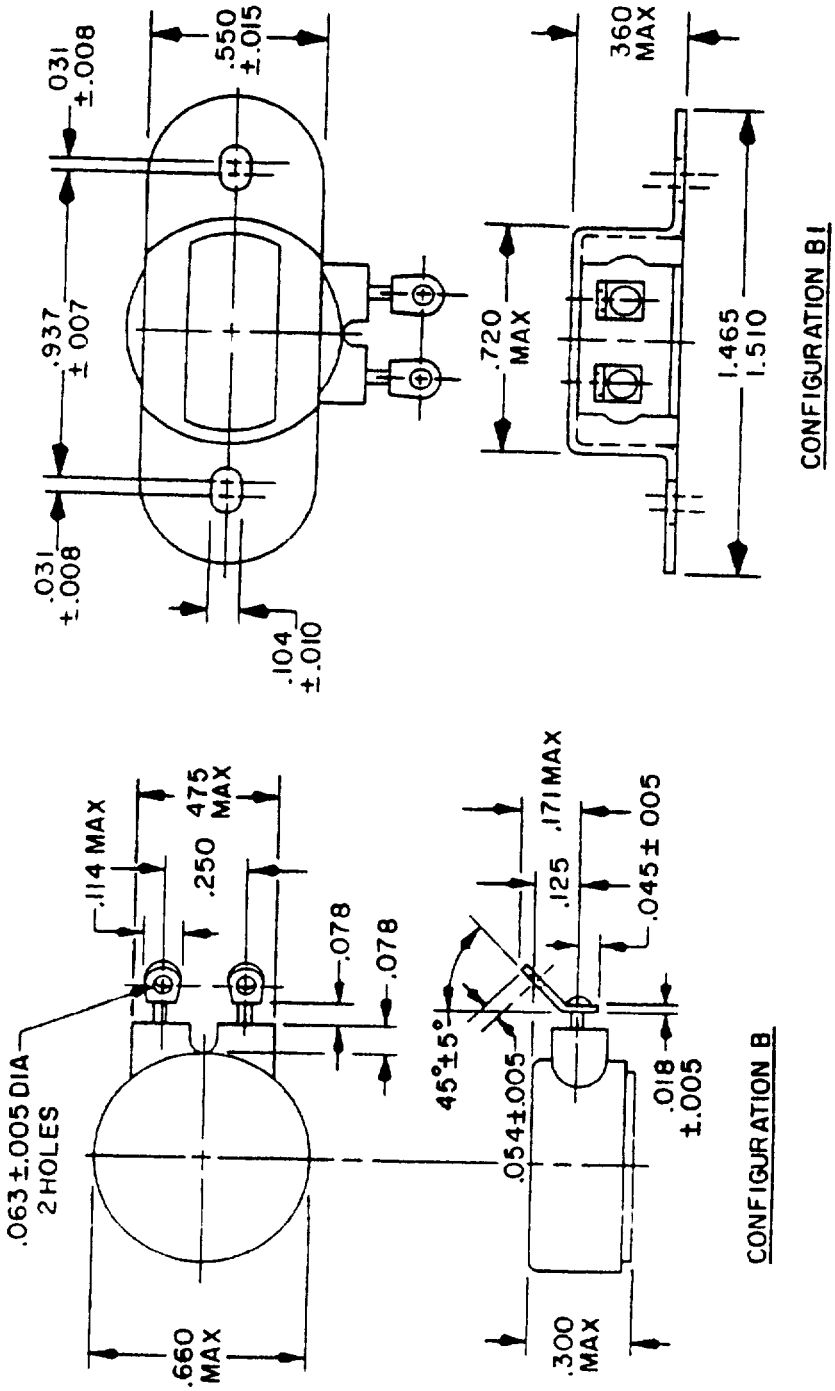


FIGURE 1. Switches - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:32Z
Check the source to verify that this is the current version before use.


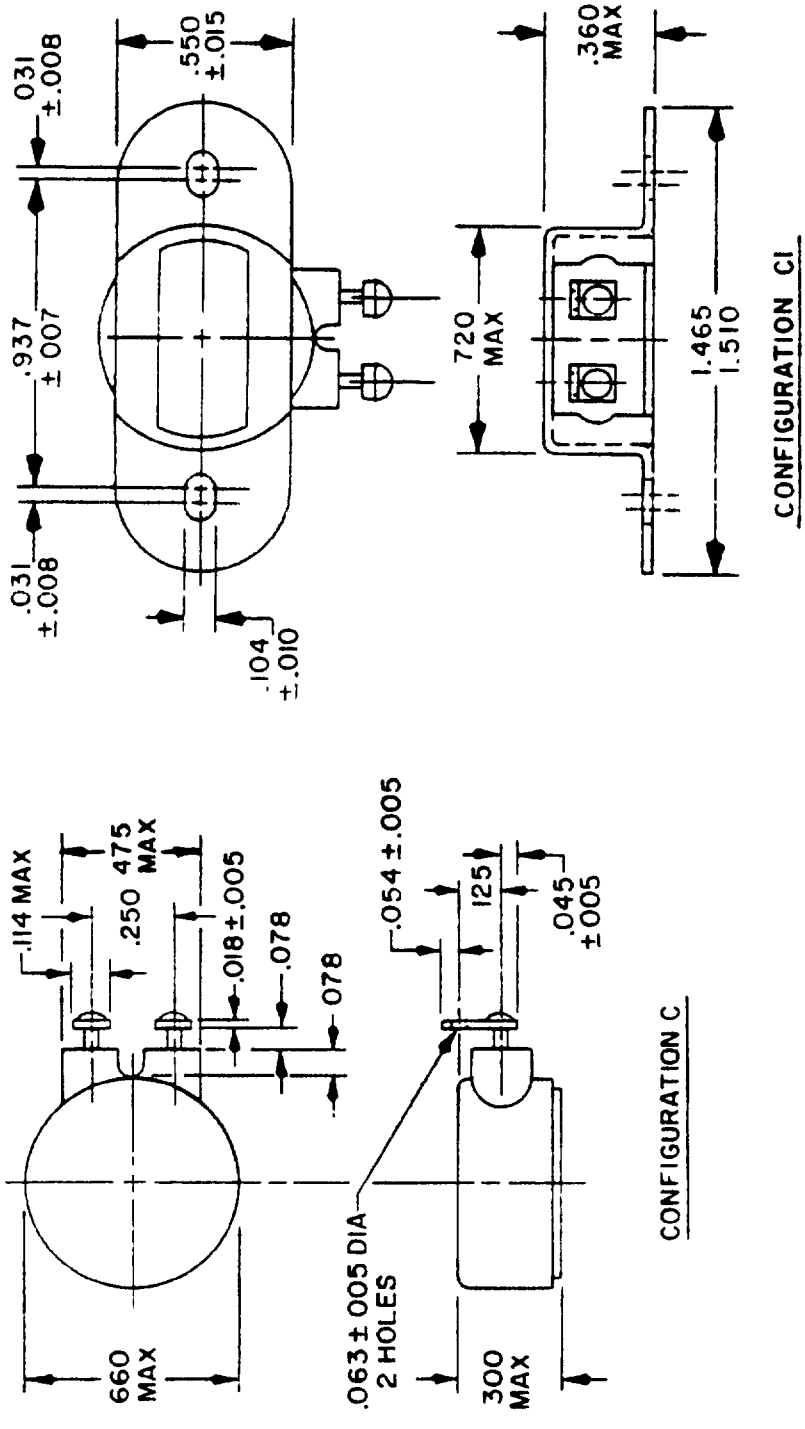


FIGURE 1. Switches - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:32Z
Check the source to verify that this is the current version before use.

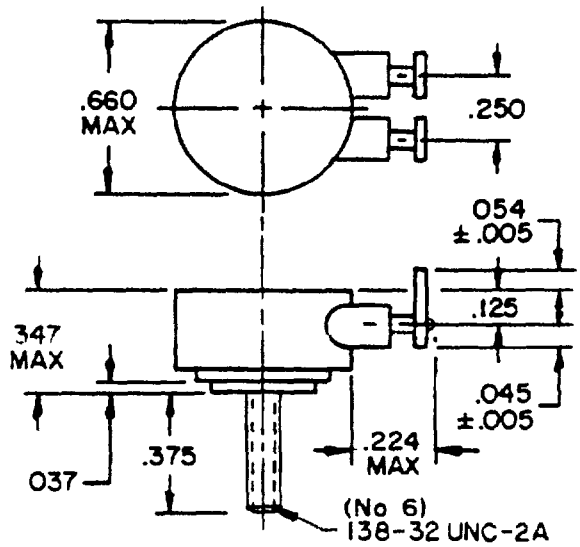

CONFIGURATION D

Inches	mm	Inches	mm
005	0.13	.138	3.51
.007	0.18	171	4.34
008	0.20	.218	5 54
010	0 25	.224	5.69
015	0 38	.250	6.35
018	0 46	.300	7.62
031	0.79	.347	8 81
.037	0 94	360	9.14
045	1.14	.375	9.53
054	1 37	458	11.63
063	1 60	550	13 97
073	1 85	.660	16.76
.078	1.98	.720	18 29
.104	2.64	937	23 80
.114	2 90	1 465	37.21
.125	3 18	1 510	38.35

NOTES:
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ± 015 (0.38 mm)
4. Switch case material is steel, nickel plated
5. Removable mounting brackets furnished for use with configurations A1, B1, and C1 are made of stainless steel.

FIGURE 1. Switches - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

(H) Operating temperature range: -10°F to +300°F.

Class: 4, except vibration 10 to 2,000 Hz, 10G.

Mounting: See table I and figure 2.

Weight: Not to exceed 12 grams, including mounting bracket.

Dielectric withstanding voltage: 70,000 feet - 350 V ac.

Operating temperature and tolerance: See tables II, III, and IV

Electrical ratings: See table V.

Endurance test See table V


Low level: When specified, see part number information, 250,000 cycles.

QUALIFICATION:

Single submission: Restricted to switch submitted

Group submission: See table VI.

Part number: Consists of "M" prefix followed by specification sheet number, a dash (-), and a four letter code. The four or five letter code identifies the configuration and contact action (code from table I), operating temperature (temperature to the nearest 25°F, code from table II, and temperature setting to the nearest 5°F with applicable tolerance, code from table III); and temperature differential (code from table IV). The five-letter code used in the following example identifies a low level switch of configuration A (figure 1) which closes on increasing temperature at 140°F ±4°F and opens on decreasing temperature 2°F to 5°F below the actual closing temperature. Use the letter "L" as a suffix for the part number when a low level switch is required

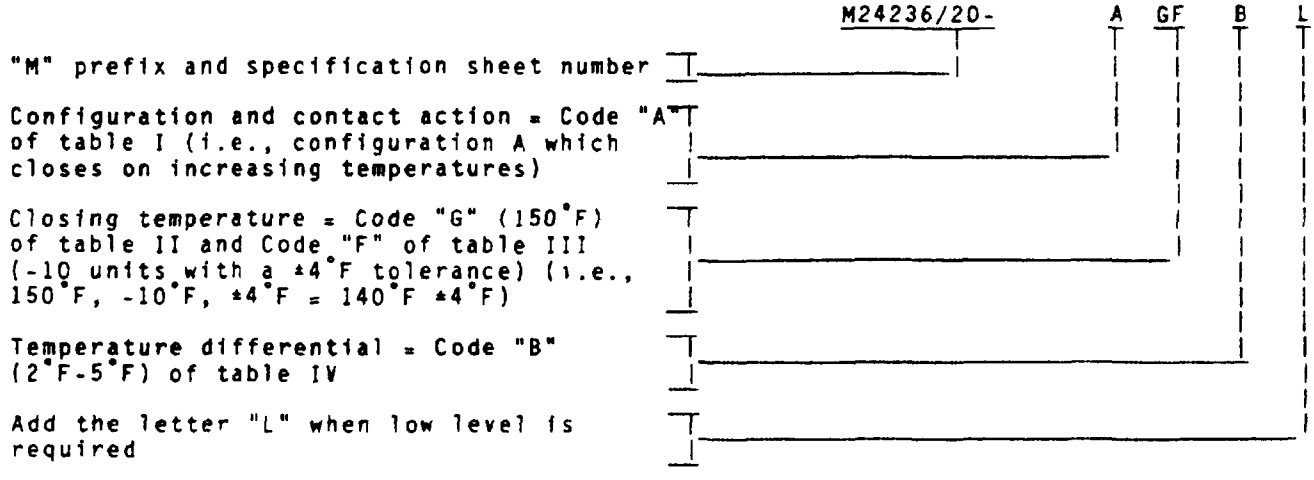

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:32Z
Check the source to verify that this is the current version before use.

(H) TABLE I. Configuration and contact action

	Configuration							Contact action
	A	A1	B	B1	C	C1	D	
Code - - -	A	C	E	G	J	L	1	Close on increasing temperature
Code - - -	B	D	F	H	K	M	2	Close on decreasing temperature
Code 1/2/-	N	Q	S	U	W	Y	3	Open on increasing temperature
Code 1/2/-	P	R	T	V	X	Z	4	Open on decreasing temperature

1/ Available tolerance is ±5°F only (see table III).
(H) 2/ Inactive for new design

(H) TABLE II. Temperature setting to the nearest 25°F.

Temperature °F	Code	Temperature °F	Code 1/
0	A	225	K
25	B	250	L
50	C	275	M
75	D	300 (maximum)	N
100	E		
125	F		
150	G		
175	H		
200	J		

1/ Temperature setting codes P, Q, R, and S, for temperatures 325, 350, 375, and 400°F respectively, have been canceled without replacement.

(H) TABLE III Temperature setting to the nearest 5°F

Units	Tolerance ±3°F 1/	±4°F	±5°F
-10	A	F	L
- 5	B	G	M
0	C	H	N
+ 5	D	J	P
+10	E	K	Q

1/ Available to 250°F only

(H) TABLE IV Temperature differential.

Operating temp. range	Code	Available differential
-10° to +250°F	A	2 - 4°F
	B	2 - 5°F
+251° to +300°F	C	3 - 7°F

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:32Z
Check the source to verify that this is the current version before use.

TABLE V. Electrical ratings.

Load	28 V dc (amperes)	115 V ac, 60 Hz (amperes)	Life cycles
Resistive	2.0	2.0	250,000
Inductive	1.0	1.5	250,000
Lamp	1.0	0.5	250,000
Low level ratings			
	30 milli-volts dc 1/		
Resistive	10 milli-amperes		250,000

1/ Or 30 millivolts peak ac.

TABLE VI. Extent of qualification.

Configuration	Number of samples required	Tests	Qualifies
A1	All per qualification table of MIL-S-24236	Complete per qualification inspection of MIL-S-24236	All
A, B, B1, C, C1, D	2 each	Visual and mechanical	

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - AR, MI
Navy - OS
Air Force - 17, 99
DLA - ES

User activities.
Army - AT, AV, ME, SM
Navy - AS, CG, MC, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent
DLA - ES

(Project 5930-1439)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:32Z
Check the source to verify that this is the current version before use.