INCH-POUND
MIL-PRF-24236/20J
22 January 2001
SUPERSEDING
MIL-S-24236/20H
27 April 1990

PERFORMANCE SPECIFICATION SHEET

SWITCHES, THERMOSTATIC, (BIMETALLIC), SUBMINIATURE, TYPE I, HERMETICALLY SEALED, SINGLE POLE, SINGLE THROW (SPST), 2 AMPERES AND LOW LEVEL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-PRF-24236.

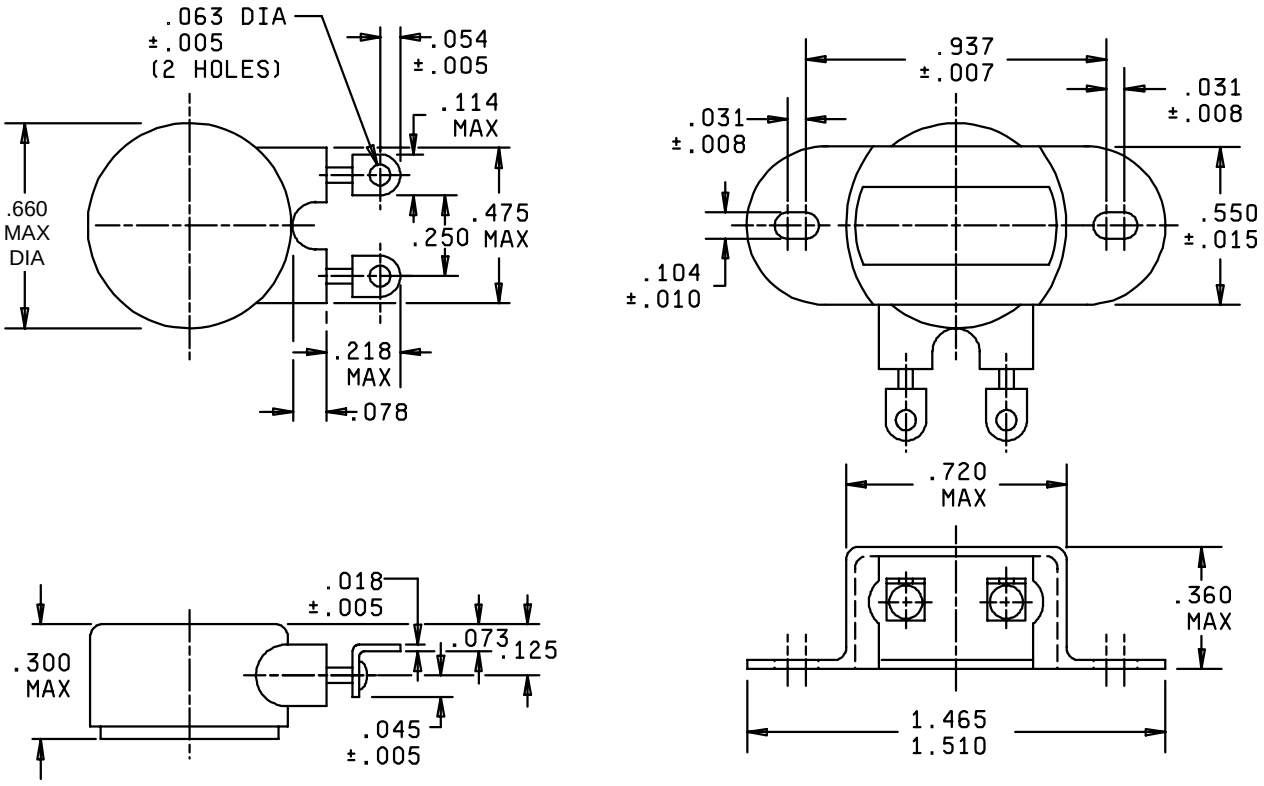


FIGURE 1. Switches.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:32Z
Check the source to verify that this is the current version before use.

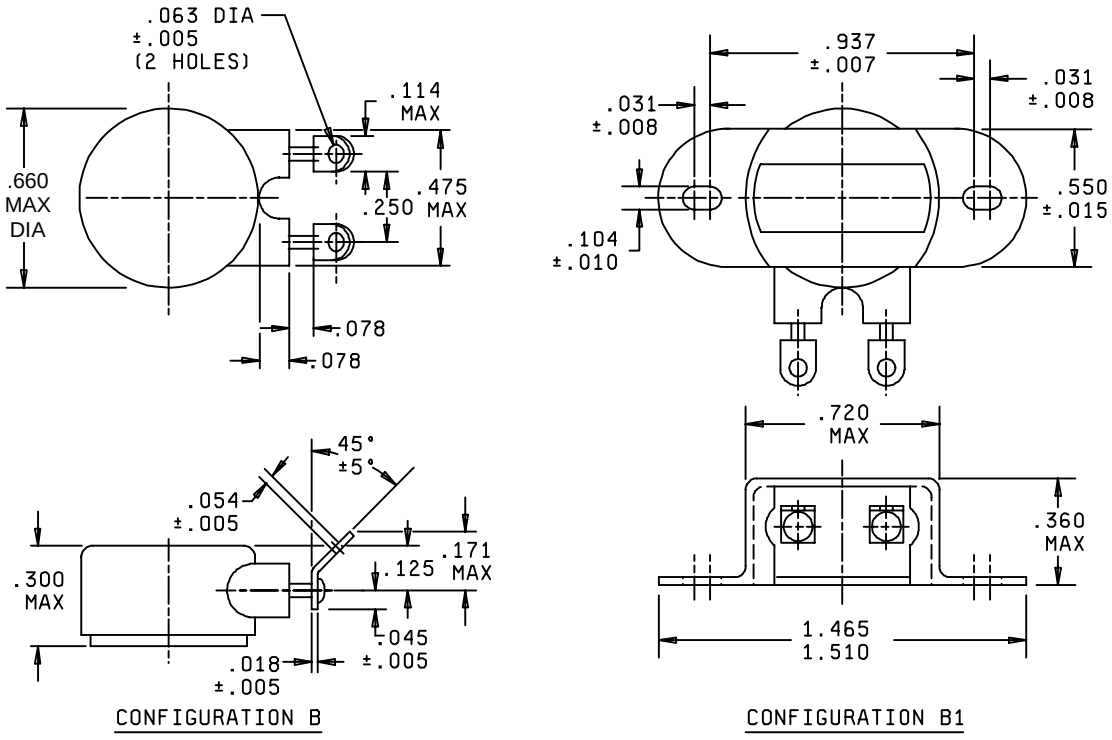


FIGURE 1. Switches - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:32Z
Check the source to verify that this is the current version before use.


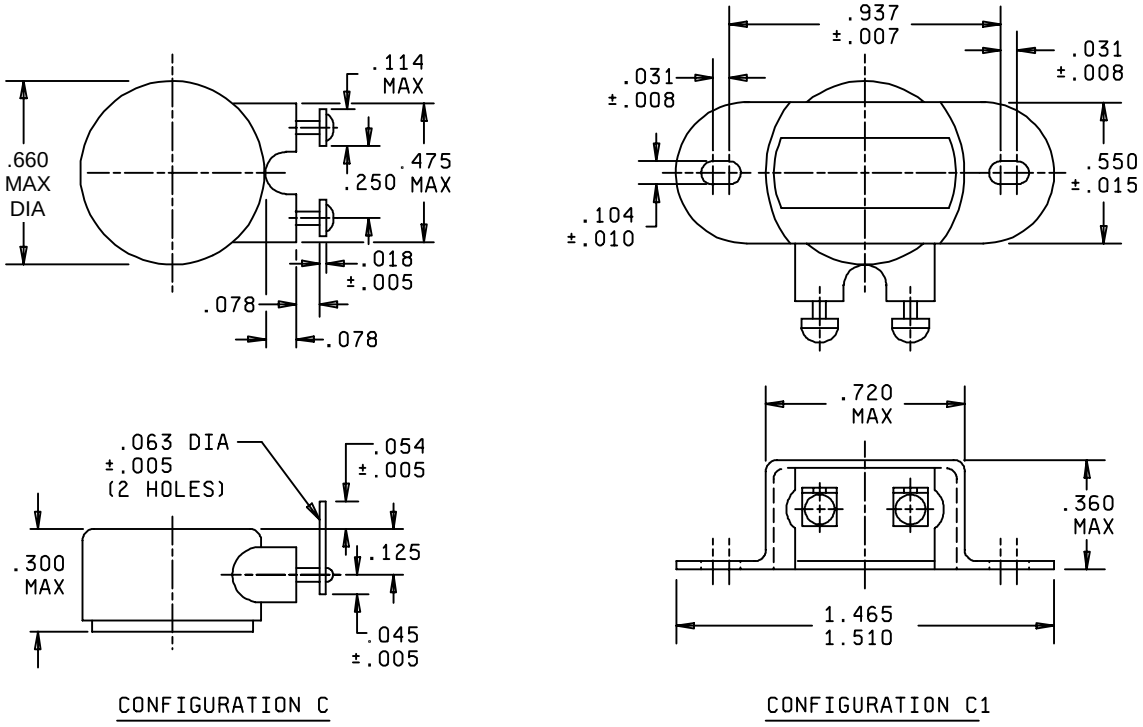


FIGURE 1. Switches - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:32Z
Check the source to verify that this is the current version before use.

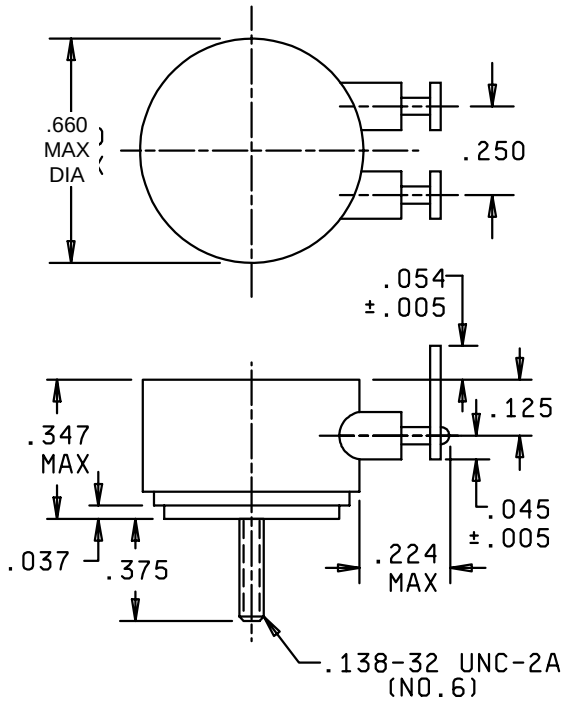

CONFIGURATION D

Inches	mm	Inches	mm
.005	0.13	.138	3.51
.007	0.18	.171	4.34
.008	0.20	.218	5.54
.010	0.25	.224	5.69
.015	0.38	.250	6.35
.018	0.46	.300	7.62
.031	0.79	.347	8.81
.037	0.94	.360	9.14
.045	1.14	.375	9.53
.054	1.37	.458	11.63
.063	1.60	.550	13.97
.073	1.85	.660	16.76
.078	1.98	.720	18.29
.104	2.64	.937	23.80
.114	2.90	1.465	37.21
.125	3.18	1.510	38.35

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.015 (0.38 mm).
4. Switch case material is steel, nickel plated.
5. Removable mounting brackets furnished for use with configurations A1, B1, and C1 are made of stainless steel.

FIGURE 1. Switches - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Operating temperature range: -10°F to +300°F.

Class: 4, except vibration 10 to 2,000 Hz, 10G.

Mounting: See table I and figure 2.

Weight: Not to exceed 12 grams, including mounting bracket.

Dielectric withstanding voltage: 70,000 feet - 350 V ac.

Operating temperature and tolerance: See tables II, III, and IV.

Electrical ratings: See table V.

Endurance test: See table V.


Low level: When specified, see part number information, 250,000 cycles.

QUALIFICATION:

Single submission: Restricted to switch submitted.

Group submission: See table VI.

Part number: Consists of "M" prefix followed by specification sheet number; a dash (-); and a four letter code. The four or five letter code identifies the configuration and contact action (code from table I); operating temperature (temperature to the nearest 25°F, code from table II, and temperature setting to the nearest 5°F with applicable tolerance, code from table III); and temperature differential (code from table IV). The five-letter code used in the following example identifies a low level switch of configuration A (figure 1) which closes on increasing temperature at 140°F ±4°F and opens on decreasing temperature 2°F to 5°F below the actual closing temperature. Use the letter "L" as a suffix for the part number when a low level switch is required.

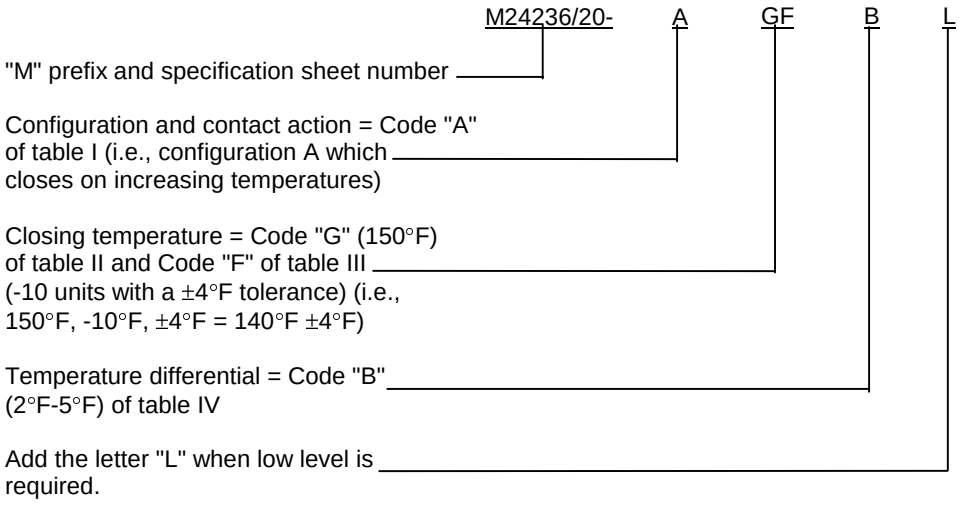

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:32Z
Check the source to verify that this is the current version before use.

TABLE I. Configuration and contact action.

	Configuration							Contact action
	A	A1	B	B1	C	C1	D	
Code- - - - - - - - -	A	C	E	G	J	L	1	Close on increasing temperature
Code- - - - - - - - -	B	D	F	H	K	M	2	Close on decreasing temperature
Code 1/ 2/- - - - -	N	Q	S	U	W	Y	3	Open on increasing temperature
Code 1/ 2/- - - - -	P	R	5	V	X	Z	4	Open on decreasing temperature

1/ Available tolerance is ±5°F only (see table III).
2/ Inactive for new design.

TABLE II. Temperature setting to the nearest 25°F.

Temperature	Code	Temperature	Code 1/
°F		°F	
0	A	175	H
25	B	200	J
50	C	225	K
75	D	250	L
100	E	275	M
125	F	300	N
150	G	(maximum)	

1/ Temperature setting codes P, Q, R, and S, for temperatures 325, 350, 375, and 400°F respectively, have been canceled without replacement.

TABLE III. Temperature setting to the nearest 5°F.

Units	Tolerance		
	±3°F 1/	±4°F	±5°F
-10	A	F	L
- 5	B	G	M
0	C	H	N
+ 5	D	J	P
+10	E	K	Q

1/ Available to 250°F only.

TABLE IV. Temperature differential.

Operating temp range	Code	Available differential
-10°F to +250°F	A	2°F - 4°F
	B	2°F - 5°F
-251°F to +300°F	C	3°F - 7°F

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:32Z
Check the source to verify that this is the current version before use.

TABLE V. Electrical ratings.

Load	28 V dc	115 V ac, 60 Hz	Life cycles
	(amperes)	(amperes)	
Resistive	2.0	2.0	250,000
Inductive	1.0	1.5	250,000
Lamp	1.0	0.5	250,000
Low level ratings			
	30 milli-volts dc 1/		
Resistive	10 milli-amperes		250,000

1/ Or 30 millivolts peak ac.

TABLE VI. Extent of qualification.

Configuration	Number of samples required	Tests	Qualifies
All	All in accordance with qualification table of MIL-PRF-24236	Complete in accordance with qualification inspection of MIL-PRF-24236	All
A, B, B1, C, C1, D	2 each	Visual and mechanical	

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AR, AT, AV CR4, MI
Navy - AS, CG, MC, OS, SH
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5930-1714-07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:32Z
Check the source to verify that this is the current version before use.