NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND
MIL-PRF-24236/24C
25 July 1990
SUPERSEDING
MIL-S-24236/24B
4 November 1983

PERFORMANCE SPECIFICATION SHEET

SWITCHES, THERMOSTATIC, (BIMETALLIC), SUBMINIATURE, TYPE I, HERMETICALLY SEALED, © SINGLE POLE, DOUBLE THROW (SPDT), 2 AMPERES AND LOW LEVEL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-PRF-24236


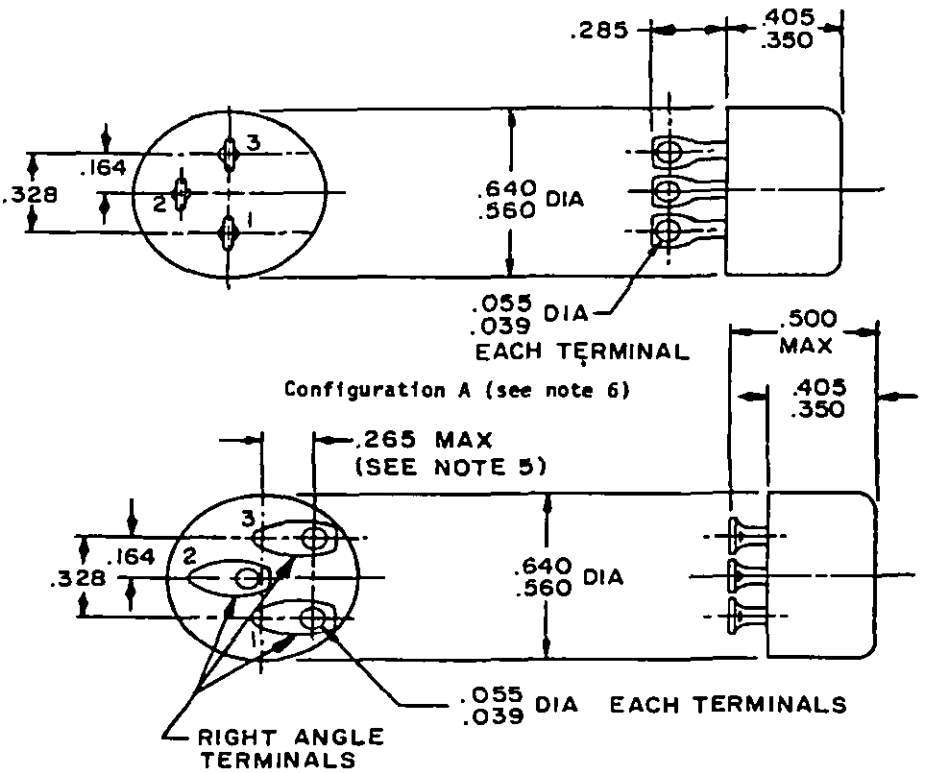


FIGURE 1. Switches.


©denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

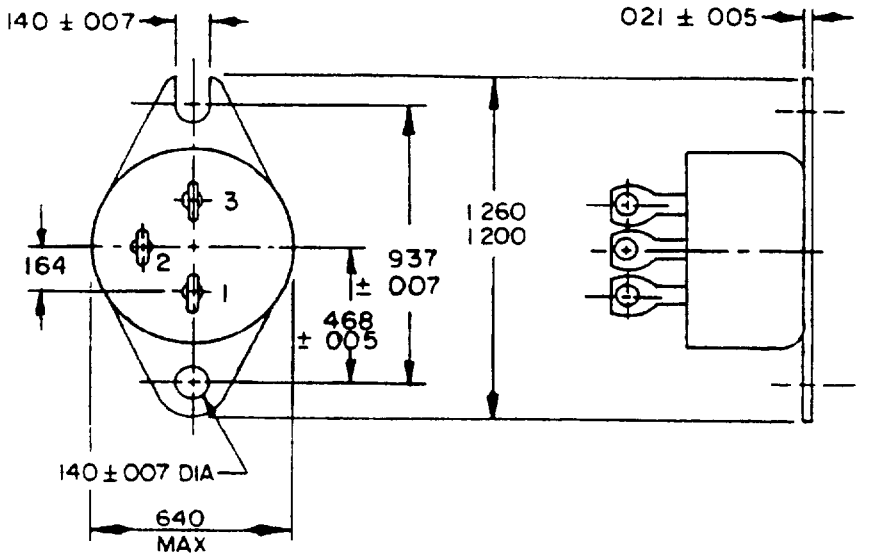


Configuration A1

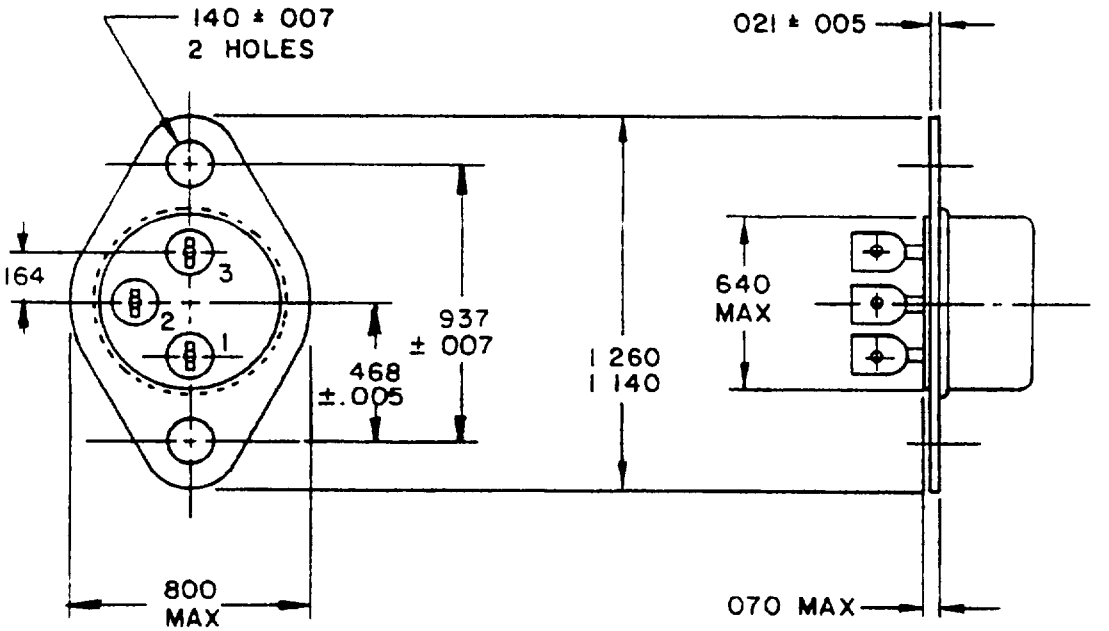


Configuration A2

FIGURE 1. Switches - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

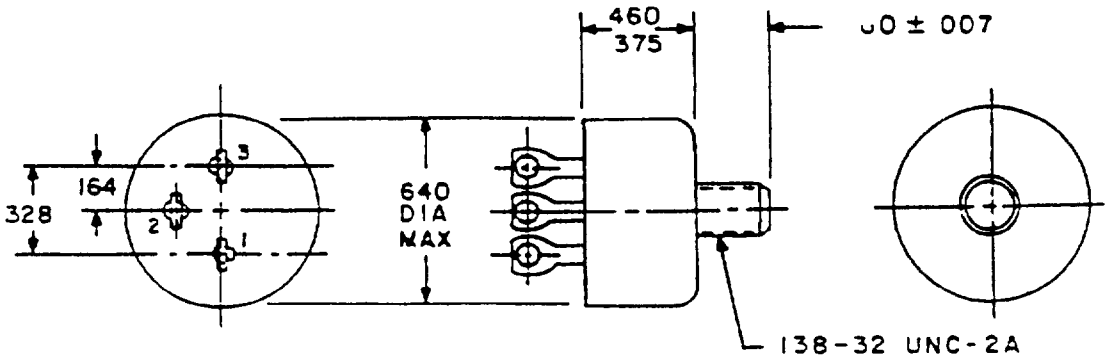


Configuration A3 (stud mounted)

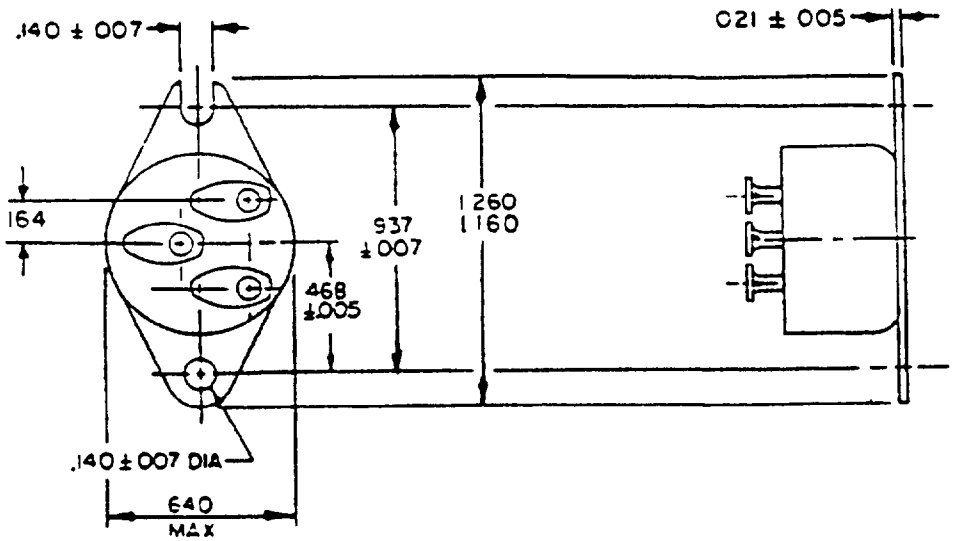


Configuration B1

FIGURE 1. Switches - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

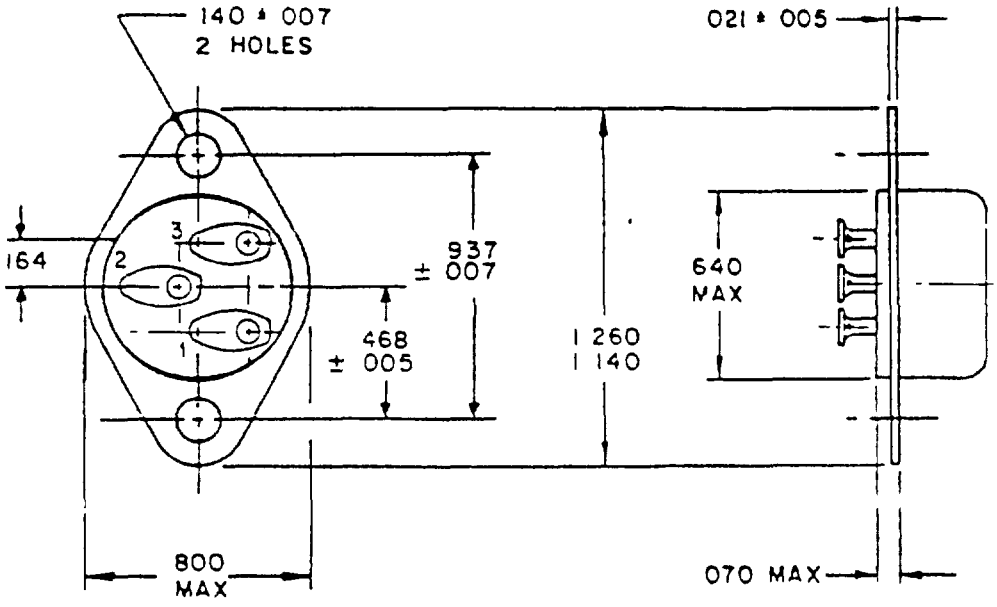

Configuration B2



WIRING DIAGRAM

Below low temperature setting, circuit 1-2 is open
Above high temperature setting, circuit 2-3 is open

FIGURE 1. Switches - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.005	0 13	.164	4.17	.531	13 49
.007	0.18	.187	4.75	.560	14.22
.021	0 53	265	6.73	640	16.26
039	0.99	285	7.24	680	17.27
.049	1.24	.328	8.33	.800	20.32
.055	1.40	.350	8.89	.937	23 80
.070	1.78	.395	10.03	1.140	28.96
.071	1.80	.405	10.29	1.160	29.46
125	3 18	460	11.68	1 200	30.48
140	3 56	468	11.89	1.260	32 00
.160	4.06	.500	12.70		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.015 (0.38 mm).
4. Exact shape of switch and terminals are optional provided dimensions specified are not exceeded.
5. This dimension not to exceed extended envelope of the switch
6 Mounting brackets are not to be furnished.
7 Configurations A1, A2, and A3 use basic switches of configuration A
Configurations B1, B2, and B3 use basic switches of configuration B.

FIGURE 1. Switches - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1 and table I

Operating temperature range -65°F to 400°F

Class Class 4, except 80,000 feet and vibration 10 - 2,000 Hz, 10G

Mounting See figure 1.

Weight Not to exceed 025 pound

Creepage. Applicable.

Operating temperature and tolerance See tables II and III.

Torque (switch mounting) 15 foot-pounds.

Ⓒ Electrical ratings See table IV.

Endurance test See table IV.

Ⓒ Low level When specified see part number information.

QUALIFICATION

Single submission Restricted to switch submitted

Group submission: See table V.

Ⓒ Part number Consists of "M" prefix followed by specification sheet number, a dash (-), and a five- or six-letter code. The five-letter code identifies the configuration (code from table I), high temperature setting to the nearest 25°F (code from table II); high-temperature setting to the nearest 5°F and applicable tolerance (code from table III); low-temperature setting to the nearest 25°F (code from table II), and low-temperature setting to the nearest 5°F and applicable tolerance (code from table III). The six-letter code used in the following example identifies a switch of configuration A (figure 1) which actuates at 65°F ±6°F and deactuates at 25°F ±6°F and has low level capabilities

Note Refer to table VI to avoid generating a part number that can not be acquired

EXAMPLE

M24236/24-A GF EH L

"M" prefix and specification sheet number

Configuration = code "A" of table I (i.e., configuration A)

High temperature setting = code "G" (75°F) of table II and code "F" (-10°F ±6°F) of table III (i.e., 75°F, -10°F, ±6°F = 65°F ±6°F)

Low temperature setting = Code "E" (25°F) of table II and code "H" (0°F ±6°F) of table III (i.e., 25°F, 0°F, ±6°F = 25°F ±6°F)

Add the letter "L" when low level is required

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

TABLE I. Configuration

	Configuration						
	A	A1	A2	A3	B	B1	B2
Code - - - -	A	B	C	D	E	F	G

TABLE II. High temperature setting to the nearest 25°F.

Code	Temperature (°F)	Code	Temperature (°F)	Code	Temperature (°F)
A - -	-75	H - -	100	Q - -	275
B - -	-50	J - -	125	R - -	300
C - -	-25	K - -	150	S - -	325
D - -	0	L - -	175	T - -	350
E - -	25	M - -	200	U - -	375
F - -	50	N - -	225	V - -	400
G - -	75	P - -	250		

TABLE III. Temperature setting to the nearest 5°F.

	Unit					Tolerance
	-10	-5	0	+5	+10	
Code - - - - -	A	B	C	D	E	±4°F
Code - - - - -	F	G	H	J	K	±6°F
Code - - - - -	L	M	N	P	Q	±8°F
Code - - - - -	R	S	T	U	V	±10°F
Code - - - - -	W	X	Y	Z	1	±12°F

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

© TABLE IV. Electrical ratings

Load	Altitude			Life cycles
	Sea level		80,000 feet	
	28 V	115 V, 60 Hz	28 V	
	(amperes)	(amperes)	(amperes)	
Resistive	2.0	2.0	2.0	100,000
Inductive	1.0	1.0	1.0	100,000
Lamp	0.5	0.5	0.5	100,000
Low level ratings				
	30 millivolts dc 1/			
	10 milli-amperes			250,000

1/ Or 30 millivolts peak ac.

TABLE V. Extent of qualification.

Configuration	Number of samples required	Tests	Qualifies
A1	All per qualification table of MIL-S-24236	Complete per qualification inspection of MIL-S-24236	All
A, A2, B, B1, B2	Two each	Visual and mechanical	
A3	Two each	Visual and mechanical, torque, vibration, and shock	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

TABLE VI Available differential range and recommended tolerance

Operating temperature range (°F)	Available differential range		Available tolerance	
	Min (°F)	Max (°F)	Low (°F)	High (°F)
-65 to -1	25	200	±8	±10
0 to 300	15	200	±6	±8
301 to 350	15	200	±8	±10
351 to 400	25	200	±12	±12

NOTE: Tolerances not listed in table VI shall be coordinated with manufacturers listed on the QPL for this specification sheet before specifying a particular "M" number The fact that tolerances can be coded does not necessarily mean that it can be manufactured or acquired.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Navy - AS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, AT, AV, ME, MI
Navy - AS, MC, OS

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5930-1428-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.