MILITARY SPECIFICATION SHEET

SWITCHES, THERMOSTATIC, (BIMETALLIC), TYPE I, HERMETICALLY SEALED, SINGLE POLE, SINGLE THROW (SPST), 2 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specification and Standards (DODISS) specified in the solicitation. MIL-S-24236


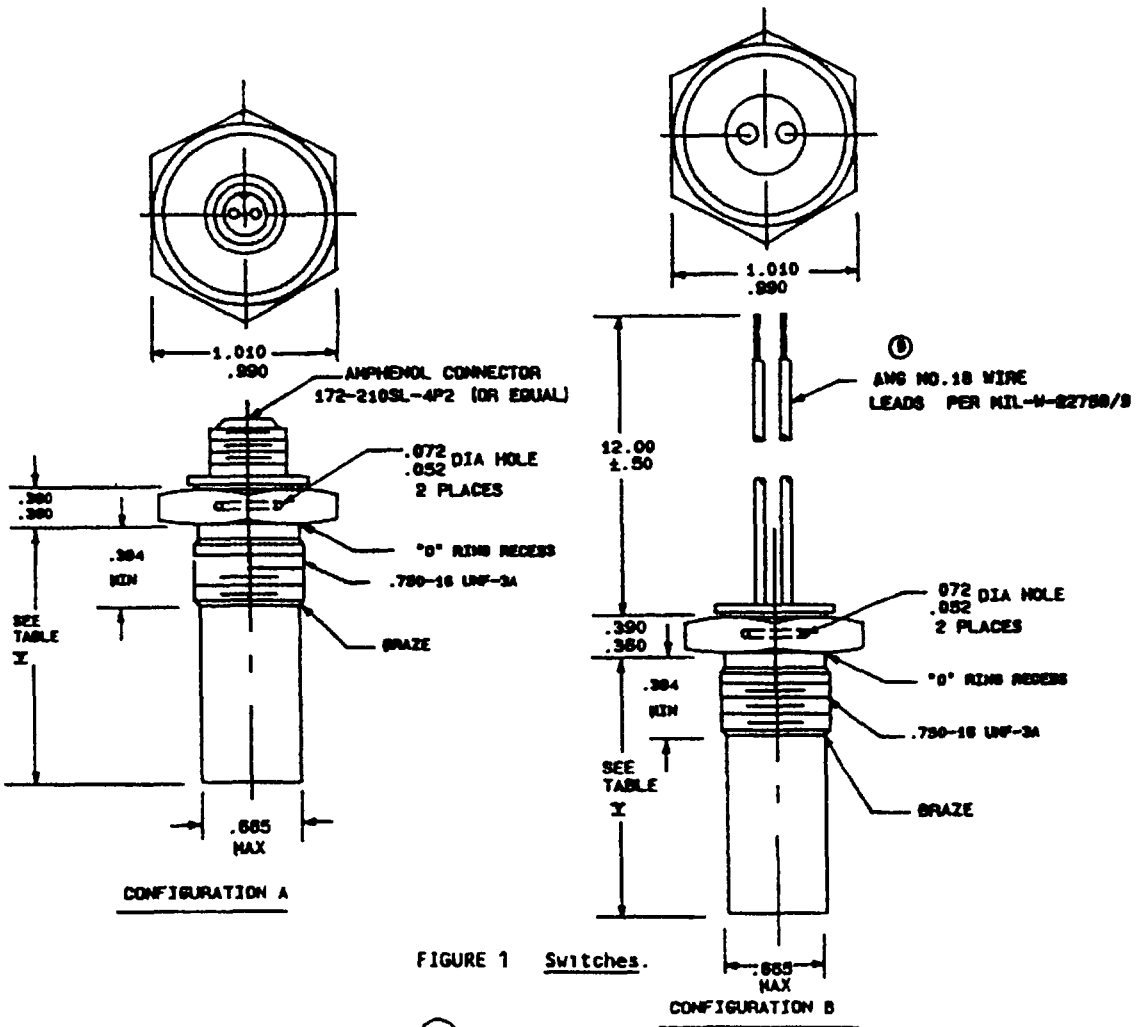


FIGURE 1 Switches.

(B) denotes change

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

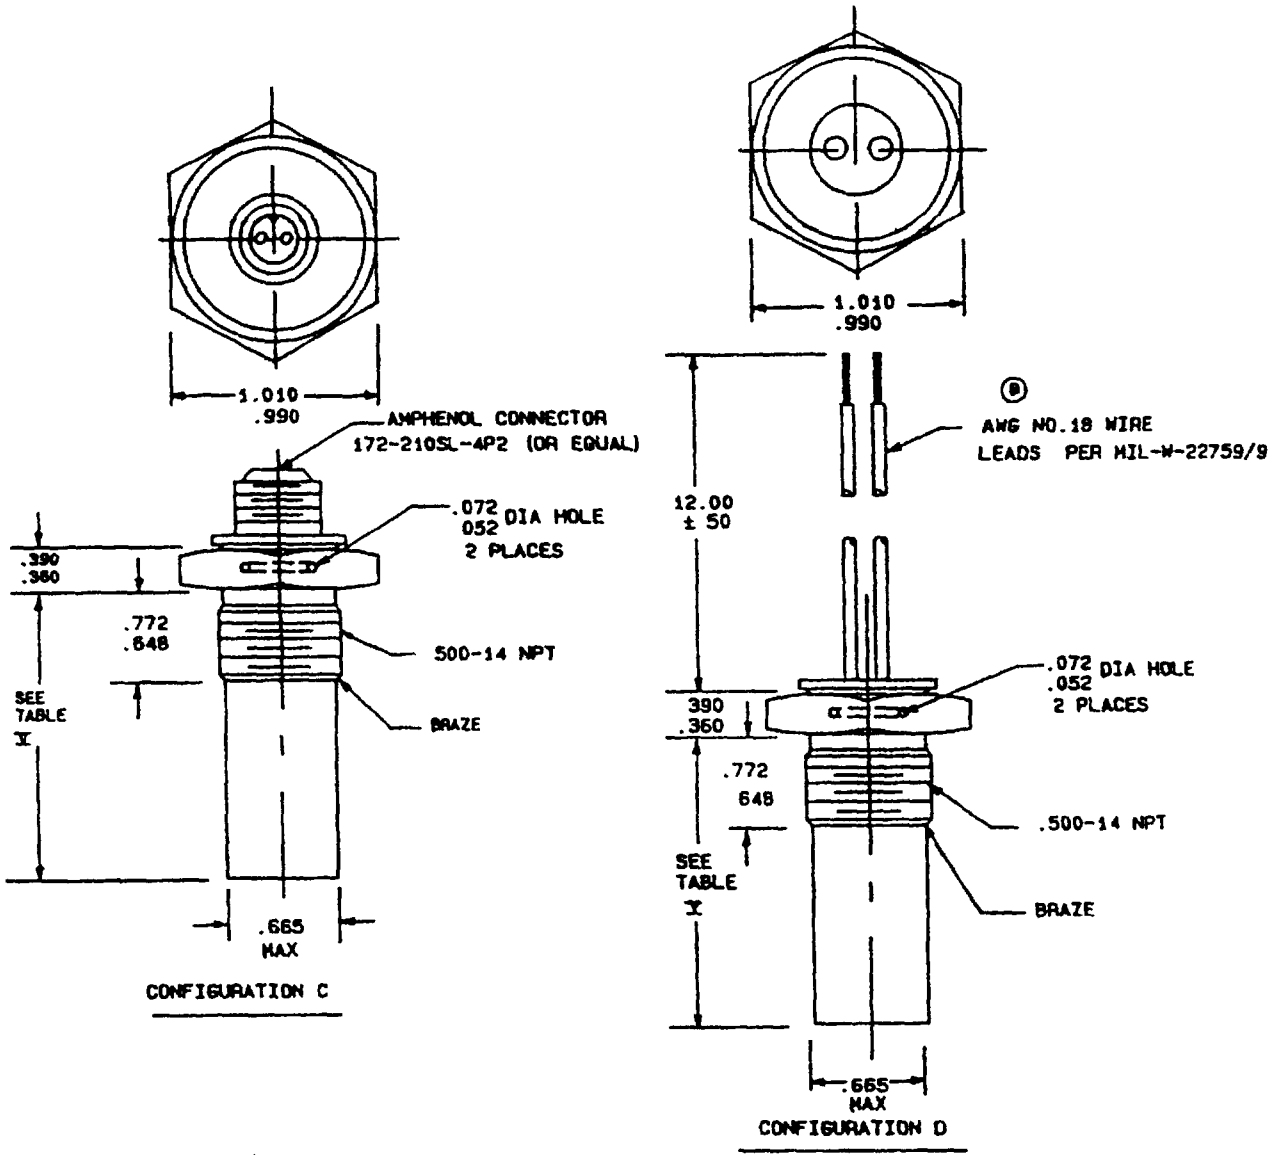

Inches	mm	Inches	mm
.052	1.32	.648	16.46
.072	1.83	.665	16.89
.360	9.14	.772	19 61
.390	9.91	.990	25.15
394	10.01	1.010	25 65
.50	12.7	12.00	304 8

NOTES:
1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25 4 mm.

FIGURE 1 Switches - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Dimensions and configuration: See figure 1 and table I

Operating temperature range: -10°F to +400°F.

Class: Class 4, except vibration 10 - 2,000 Hz, 10 g's

Mounting: See figure 1.

Weight: Approximately .22 pound.

Dielectric withstanding voltage: 70,000 ft - 350 V ac.

Operating temperature and tolerance: See tables II, III, and IV

Electrical ratings: See table VI

Endurance: See table VI.

QUALIFICATION

Group submission: See table VII

Part number Consists of the prefix "M24236/25-" and a five letter code

EXAMPLE:

M24236/25- A GF B C

"M" prefix and specification sheet number

Configuration and contact action (see table I)

Closing temperature (see tables II and III)

Temperature differential (see table IV)

Probe length (see table V)

TABLE I. Configuration and contact action.

	Configuration				Contact action
	A	B	C	D	
Code	A	C	E	G	Close on increasing temperature (open on decreasing temperature)
Code	B	D	F	H	Close on decreasing temperature (open on increasing temperature)

NOTE: The manufacturer calibrates these switches by setting the closing temperature. The opening temperature will then depend on the differential selected (see table IV)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

TABLE II. High temperature setting to the nearest 25°F

Temperature (°F)	Code	Temperature (°F)	Code
0	A	225	K
25	B	250	L
50	C	275	M
75	D	300	N
100	E	325	P
125	F	350	Q
150	G	375	R
175	H	400	S
200	J		

TABLE III. Temperature setting to the nearest 5°F.

Unit	Tolerance		
	1/ ±3°F	±4°F	±5°F
-10	A	F	L
-5	B	G	M
0	C	H	N
+5	D	J	P
+10	E	K	Q

1/ Available to 250°F only

TABLE IV. Temperature differential.

Closing temperature range	Code	Available differential
-10°F to 250°F	A	2-4°F
	B	2-5°F
-251°F to 400°F	C	3-7°F

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

TABLE V. Probe length.

Code	Length ± 030	Code	Length ±.030
A	1.5	F	4.0
B	2.0	G	4.5
C	2.5	H	5.0
D	3.0	J	5.5
E	3.5	K	6.0

TABLE VI. Electrical ratings.

Load	28 V dc	115 V ac, 60 Hz	Life cycle
	(amperes)	(amperes)	
Resistive	2.0	2 0	250,000
Inductive	1.0	1 5	250,000
Lamp	1.0	0 5	250,000

TABLE VII. Group submission.

Configuration	Number of samples required	Tests	Extent of approval
A	3 each	Visual and mechanical examination, torque, vibration, shock, and seal	All 1/
B			
C	2 each	Torque	
D			

1/ NOTE: Qualification is based on prior approval of MIL-S-24236/20.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI, AR
Navy - SH
Air Force - 99
DLA - ES

User activities
Army - AT, AV
Navy - MC

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5930-1491)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.