NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


INCH-POUND
MIL-PRF-24236/26B
27 August 1991
SUPERSEDING
MIL-S-24236/26A
16 September 1981

PERFORMANCE SPECIFICATION SHEET

SWITCHES, THERMOSTATIC, (BIMETALLIC), TYPE I, HERMETICALLY SEALED, SINGLE POLE, DOUBLE THROW (SPDT), 2 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-PRF-24236

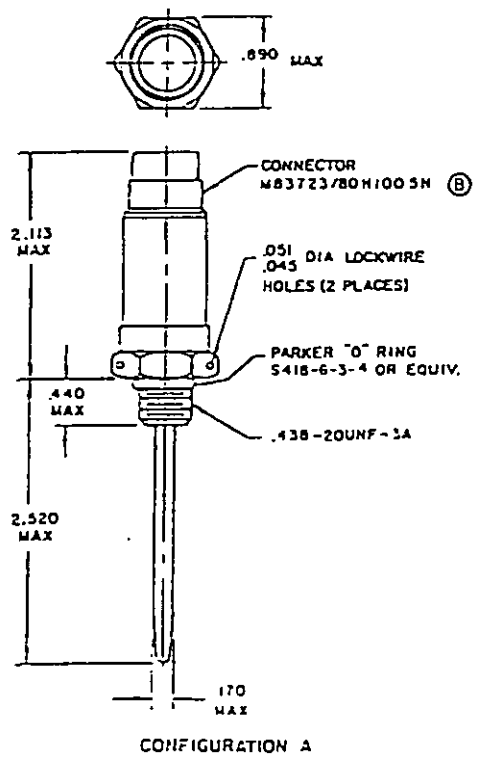


CONFIGURATION A

FIGURE 1. Configurations and dimensions.

(B) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

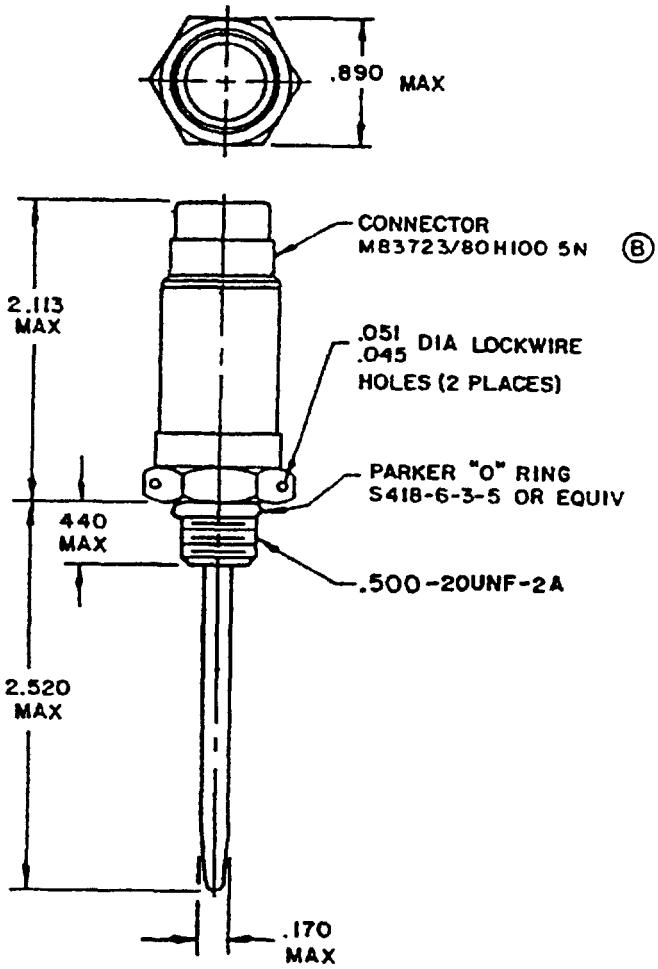

CONFIGURATION B

FIGURE 1 Configurations and dimensions - Continued


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

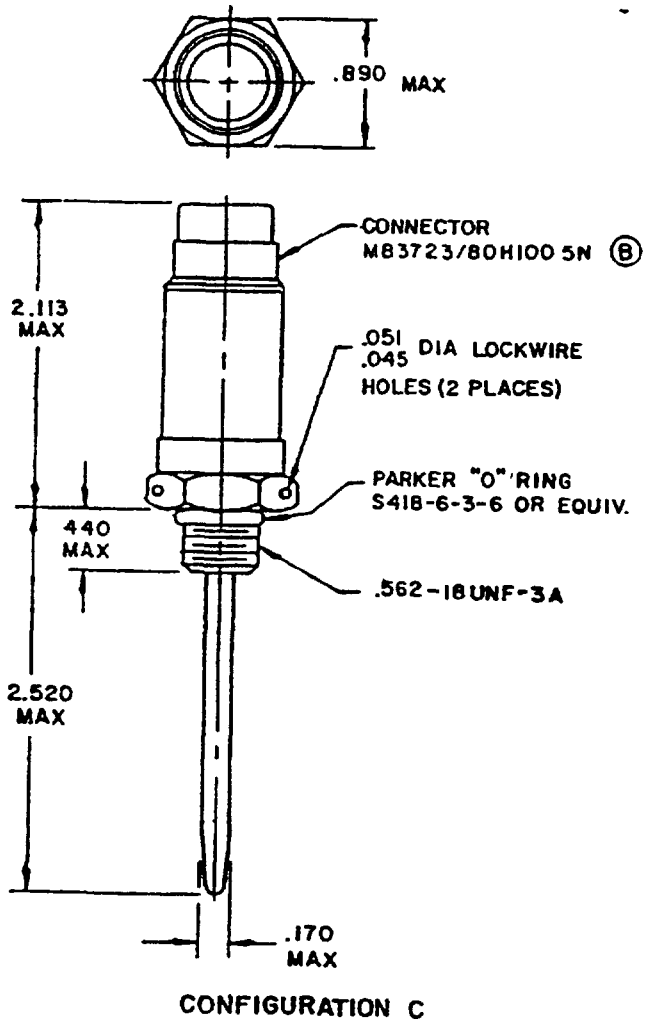

CONFIGURATION C


FIGURE 1. Configurations and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

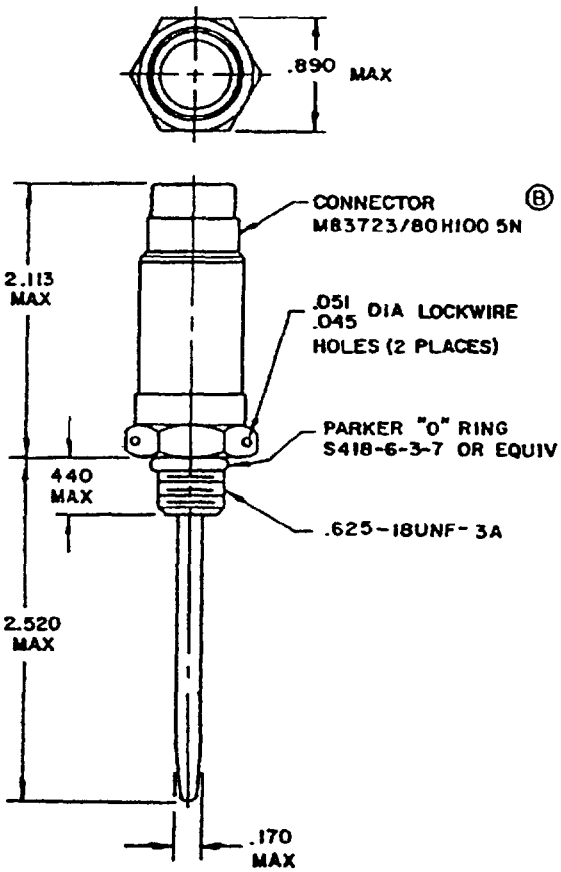


CONFIGURATION D


Inches	mm
.045	1 14
.051	1.30
.170	4 32
.250	6.35
438	11 13
.440	11 18
.562	14.27
.625	15.88
.890	22 61
2.113	53.67
2.520	64 01



SINGLE POLE, SINGLE THROW, CLOSE ON TEMPERATURE RISE



SINGLE POLE, SINGLE THROW, OPEN ON TEMPERATURE RISE



SINGLE POLE, DOUBLE THROW

WIRING DIAGRAM

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only.

FIGURE 1 Configurations and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1, configurations, A, B, C, and D, and table I

Operating temperature range: 100°F to 600°F.

Ambient temperature exposure range:
Probe: -65°F to 600°F.
Case: -65°F to 400°F

Class: 4, except vibration shall be 10 to 2,000 Hz, 10 G.

Mounting: See figure 1, configurations A, B, C, and D.

Weight: Not applicable

Torque: 15 foot-pounds

Temperature response: Applicable.

Operating temperatures and tolerances: See tables II and III.

Operating temperature differential: 10°F to 55°F.

Electrical ratings: See table IV.

Endurance: See table IV.

Part or Identifying Number (PIN): PIN's shall be assigned as illustrated below:

M24236/26	A	H	C
Specification sheet number	Configuration and contact action (see table I)	Temperature setting, to within 25°F (see table II)	Temperature setting to within 5°F (see table III)

PIN M24236/26- AHC identifies a thermostatic switch that actuates increasing temperature at 275°F and ±8°F with a temperature differential of 10°F to 55°F.

(B) Qualification. Not applicable.

(B) First article inspection: This inspection consists of meeting all of the qualification tests of MIL-S-24236. Acquisition activities may require contractors to furnish first article samples of the thermostatic (bimetallic) switch units for the purpose of Government inspection and contractual approval (the sample units are not to be considered as part of the order). First article approval is valid only on the contract under which it is granted, unless extended by the Government to another contract

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

TABLE I Configuration and contact action

Configuration					Contact action
	A	B	C	D	
Code	A	D	G	K	SPST, close on temperature rise
	B	E	H	L	SPST, open on temperature rise
	C	F	J	M	SPDT

TABLE II. Operating temperature setting of the nearest 25°F.

Temperature	Code	Temperature	Code
°F		°F	
100	A	375	M
125	B	400	N
150	C	425	P
175	D	450	Q
200	E	475	R
225	F	500	S
250	G	525	T
275	H	550	U
300	J	575	V
325	K	600	W
350	L		

TABLE III. Temperature setting to the nearest 5°F.

Units °F	Tolerance			
	±8°F	±10°F	±12°F	±15°F
-10	A	F	L	R
-5	B	G	M	S
0	C	H	N	T
+5	D	J	P	U
+10	E	K	Q	V

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

TABLE IV Electrical ratings

Load	28 V dc	115 V ac, 60 Hz	Life cycle
Resistive	2.0	2 0	50,000
Inductive	1.0	1.0	50,000
Lamp	0 5	0 5	50,000

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 17, 99
DLA - ES

User activities
Army - AR, AV
Navy - AS, MC, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5930-1452)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.