
INCH-POUND
MIL-PRF-24236/29B
w/Amendment 1
20 March 2017
MIL-PRF-24236/29B
14 February 2012

PERFORMANCE SPECIFICATION SHEET

SWITCHES, THERMOSTATIC, (BIMETALLIC), TYPE I, HERMETICALLY SEALED, SINGLE POLE, SINGLE THROW (SPST), 10 AMPERE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-PRF-24236.

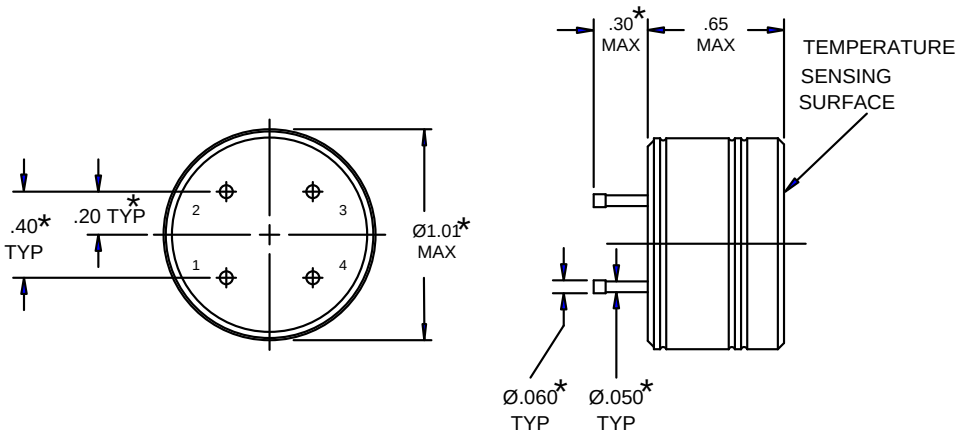


CONFIGURATION 1

WEIGHT: 0.07 pound maximum (30 grams)
* Typical all solder terminal configurations


FIGURE 1. Switches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

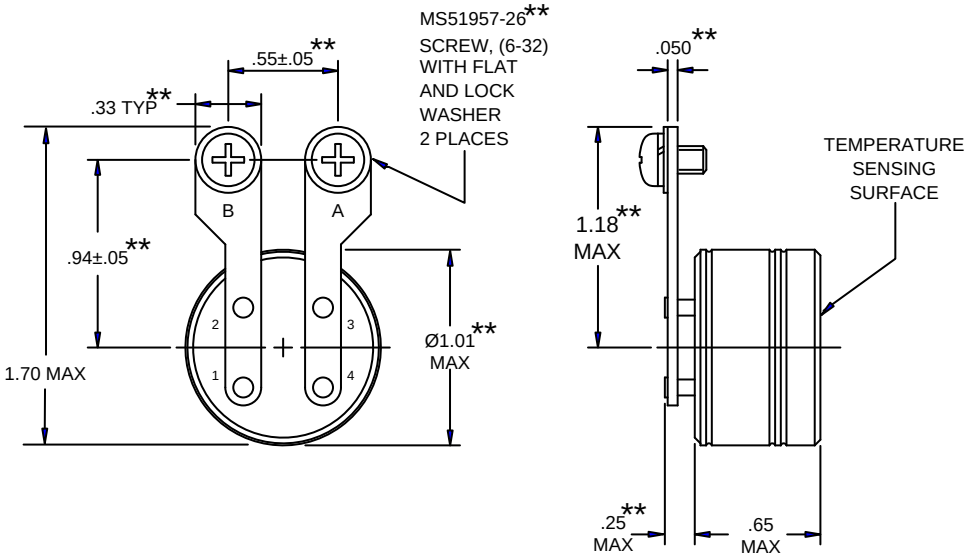

CONFIGURATION 2

WEIGHT: 0.08 pound maximum (36 grams)
** Typical all screw terminal configurations

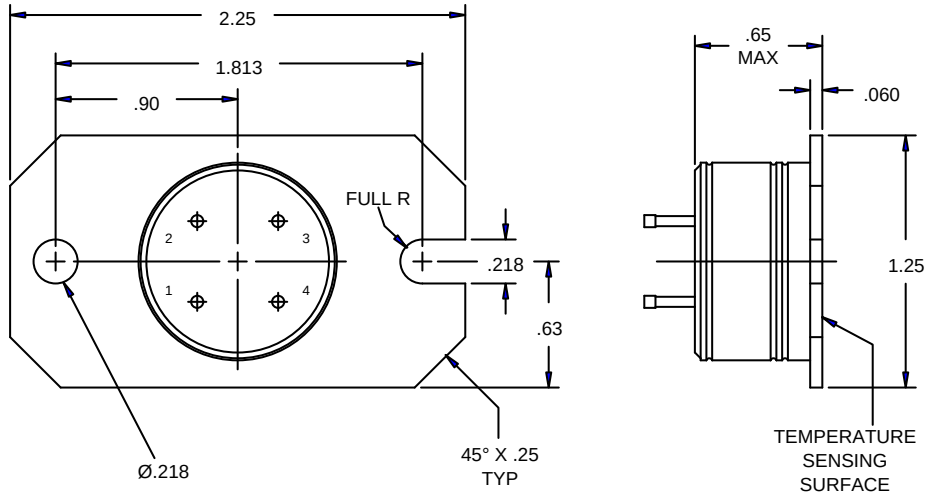


CONFIGURATION 3

WEIGHT: 0.11 pound maximum (50 grams)


FIGURE 1. Switches – Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

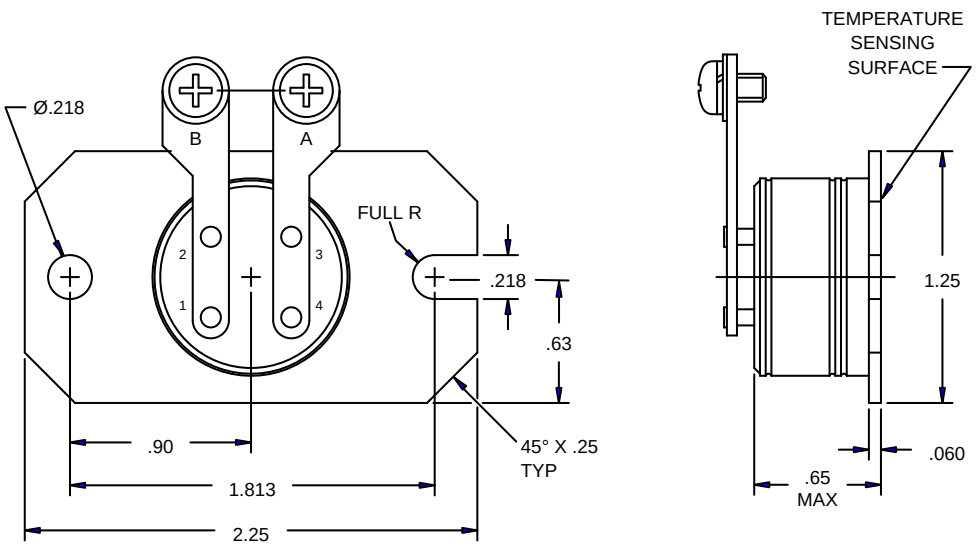

CONFIGURATION 4

WEIGHT: 0.12 pound maximum (56 grams)

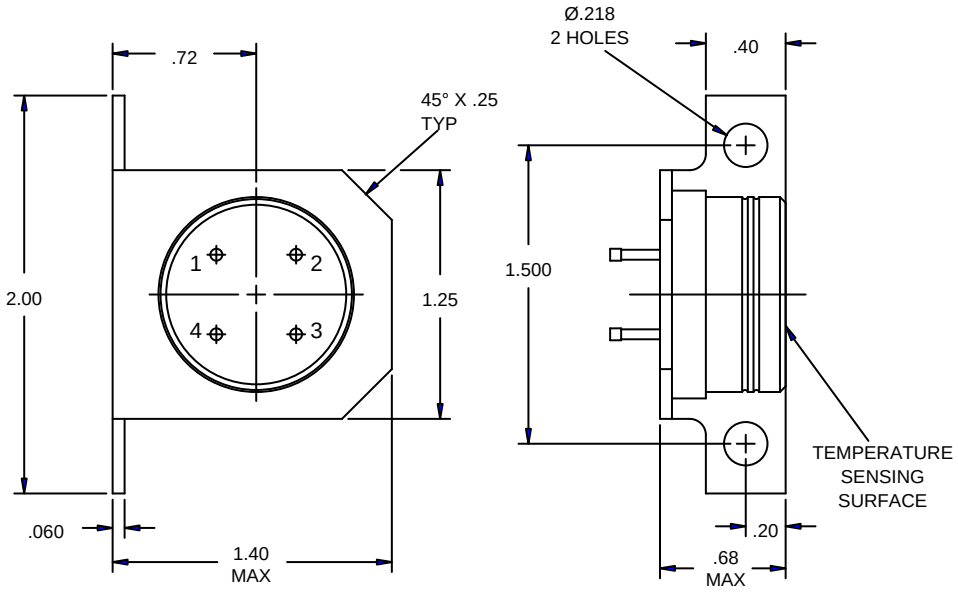


CONFIGURATION 5

WEIGHT: 0.11 pound maximum (50 grams)


FIGURE 1. Switches – Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

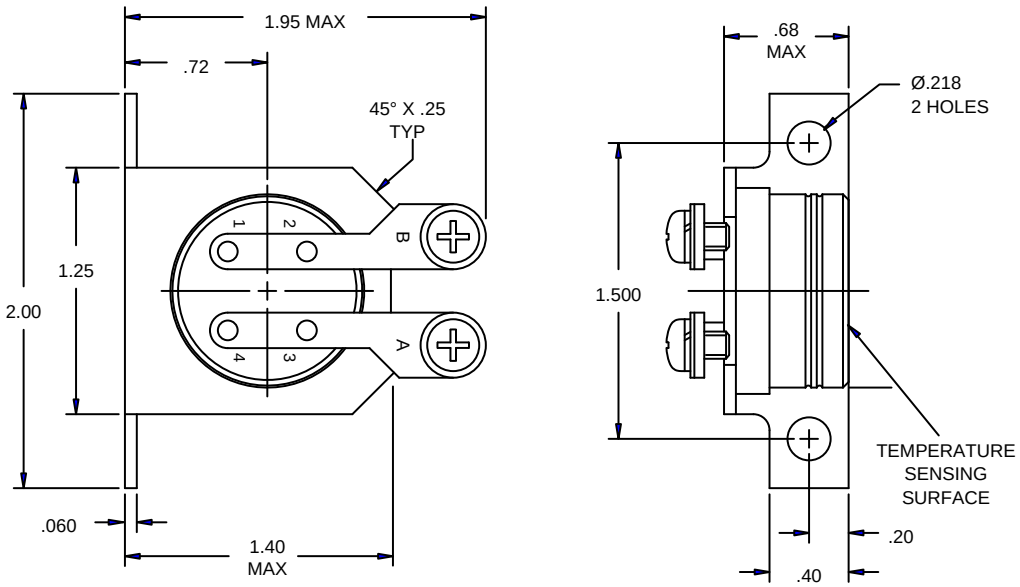

CONFIGURATION 6

WEIGHT: 0.12 pound maximum (55 grams)

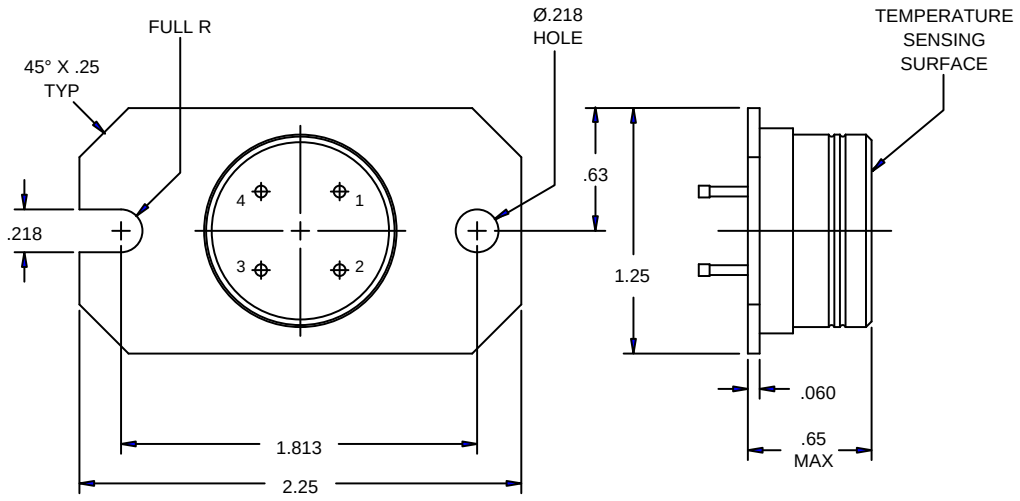


CONFIGURATION 7

WEIGHT: 0.11 pound maximum (50 grams)


FIGURE 1. Switches – Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

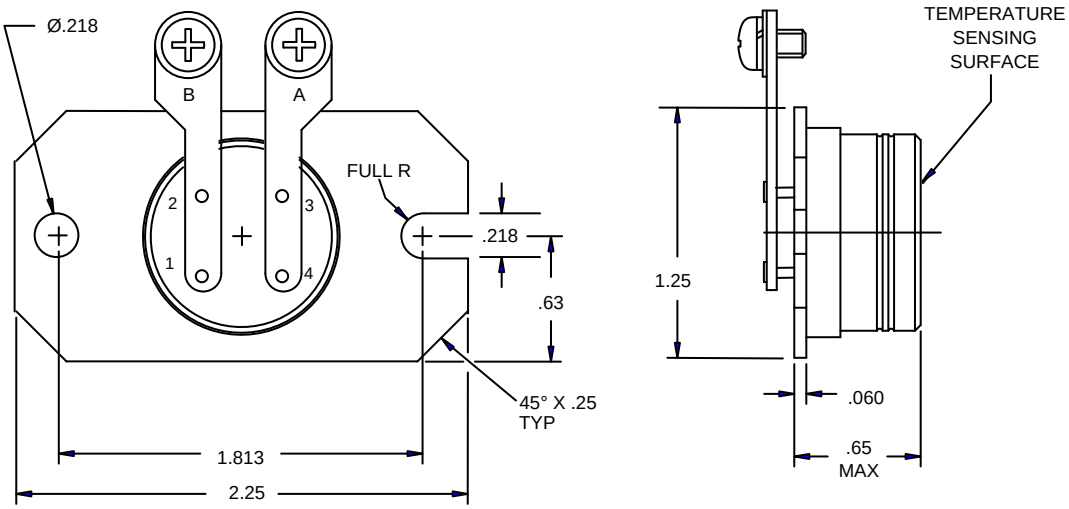

CONFIGURATION 8

WEIGHT: 0.12 pound maximum (56 grams)

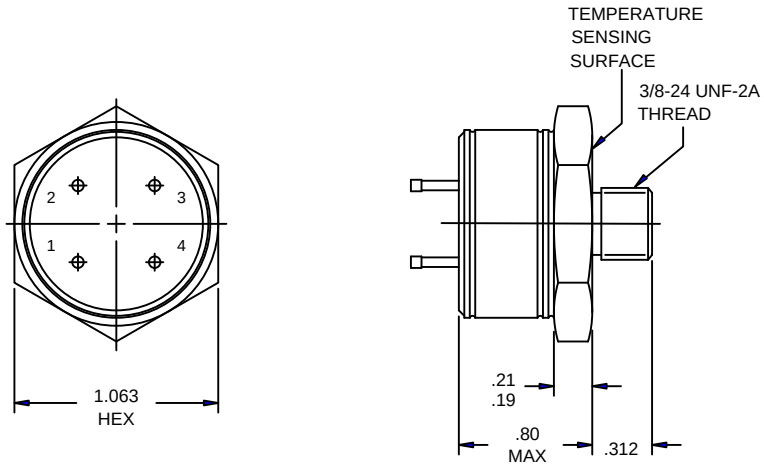


CONFIGURATION 9

WEIGHT: 0.10 pound maximum (43 grams)

FIGURE 1. Switches – Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

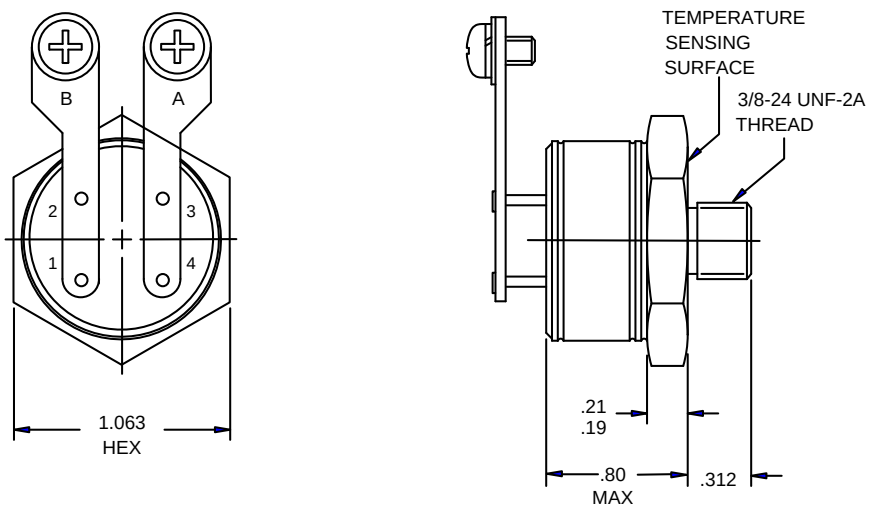

CONFIGURATION 10

WEIGHT: 0.11 pound maximum (50 grams)

FIGURE 1. Switches – Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

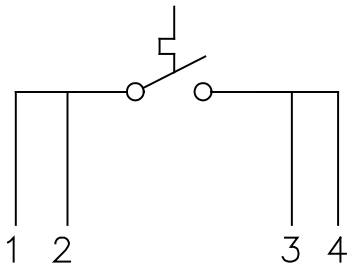


FIGURE 2. Schematic Diagram

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
0.050	1.27	0.25	6.4	0.63	16.0	0.94	23.9	1.40	35.6
0.060	1.52	0.30	7.6	0.65	16.5	0.98	24.9	1.50	38.1
0.19	4.8	0.31	7.9	0.68	17.3	1.01	25.7	1.813	46.05
0.20	5.1	0.33	8.4	0.72	18.3	1.063	27.00	1.95	49.5
0.218	5.54	0.40	10.2	0.80	20.3	1.18	30.0	2.00	50.8
0.22	5.5	0.55	14.0	0.90	22.9	1.25	31.8	2.25	57.2

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified tolerances are ±.020 (0.51 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See Figure 1 and Table I.

Tolerance: .XX = ±0.03
.XXX = ±0.010
Angle = ± 5°

Temperature Setpoint Range: -85°F (-65°C) to +350°F (+177°C).

Standard setpoint tolerance: ±5°F (2.8°C)

Standard differential (deadband): 6 to 36°F (3.3 to 20°C)

Vibration: Class 4, except vibration 10 to 2,000 Hz, 15 G

Short circuit current: 75 Amps

Mounting: See Figure 1.

Weight: See Figure 1.

Schematic Diagram: See Figure 2

Dielectric withstanding voltage: 1,500 VAC, 5 seconds, terminals to case.

Electrical ratings: See Table II.

Endurance: See Table II.

Marking: In accordance with MIL-PRF-24236.

Part or identifying Number (PIN): As shown in the following example:



The above example identifies a switch of configuration 1 which opens on increasing temperature at 68 ± 5°F, and closes on decreasing temperature at 50 ± 5°F with 10°F minimum differential.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

TABLE I. Configuration and contact action.

	Configuration										Contact action
	1	2	3	4	5	6	7	8	9	10	
Code	A	C	E	G	J	L	N	Q	S	U	Open on increasing temperature
Code	B	D	F	H	K	M	P	R	T	V	Close on increasing temperature

TABLE II. Electrical ratings.

	Altitude				Life cycles
	Sea level to Space				
	55VDC	28 VDC	115 V, 60 Hz	75 VDC	
	(amperes)	(amperes)	(amperes)	(amperes)	
Resistive	3.0	8.0	15.0	-	100.000
Resistive	3.0	10.0	15.0	-	50,000
Inductive	-	-	-	0.75	1,000,000
Motor	-	4.5	-	-	10,000

TABLE III. Extent of qualification.

Configuration	Number of samples required	Tests	Qualifies
1	All in accordance with Qualification table of MIL-PRF-24236	Complete in accordance with qualification inspect- tion of MIL-PRF-24236. Endurance 28VDC, 10.0 ampere.	All

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

Changes from previous issues: The margins of this specification are marked with vertical lines to indicate where modifications from this amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced Documents: MIL-PRF-24236

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Preparing activity:
DLA – CC

(Project 5930-2017-017)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.