
INCH-POUND
MIL-PRF-24236/30A
14 June 2012
SUPERSEDING
MIL-PRF-24236/30
8 August 2008

PERFORMANCE SPECIFICATION SHEET

SWITCHES, THERMOSTATIC, (BIMETALLIC), TYPE I, ENVIRONMENTALLY SEALED, SINGLE POLE DOUBLE THROW (SPDT), 5 AMPERES, AND LOW LEVEL

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-24236.

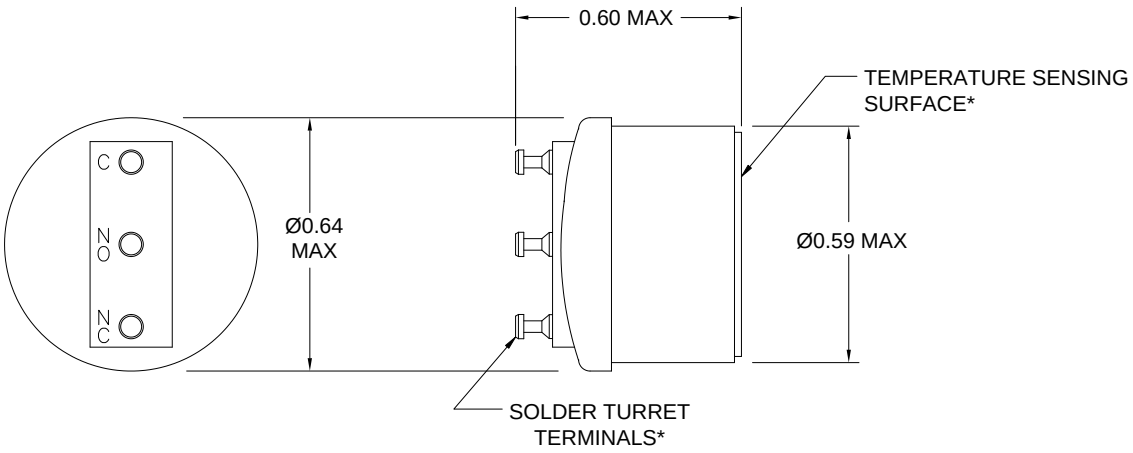


CONFIGURATION 1
WEIGHT: 8 grams maximum
* Typical all configurations

FIGURE 1. Switches, thermostatic, (bimetallic), type I, environmentally sealed, SPDT

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:35Z
Check the source to verify that this is the current version before use.

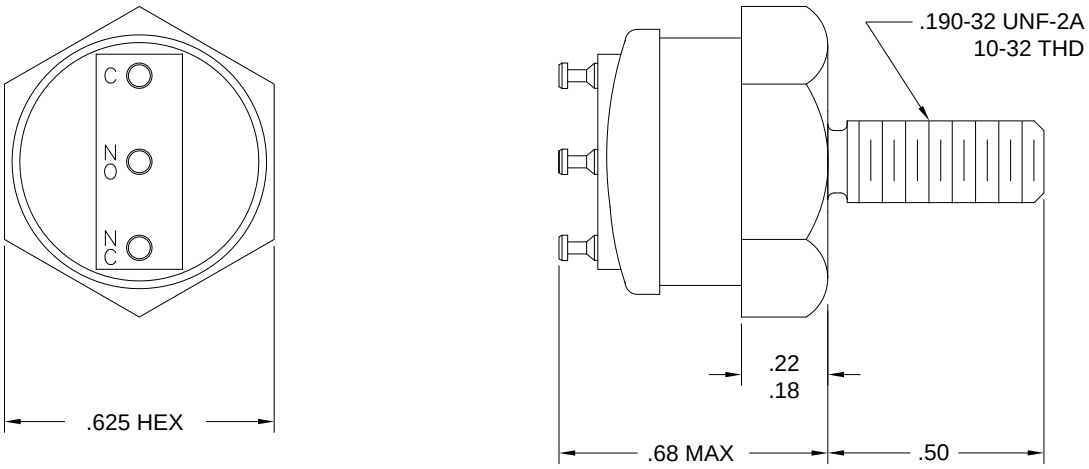


CONFIGURATION 2
WEIGHT: 14 grams maximum

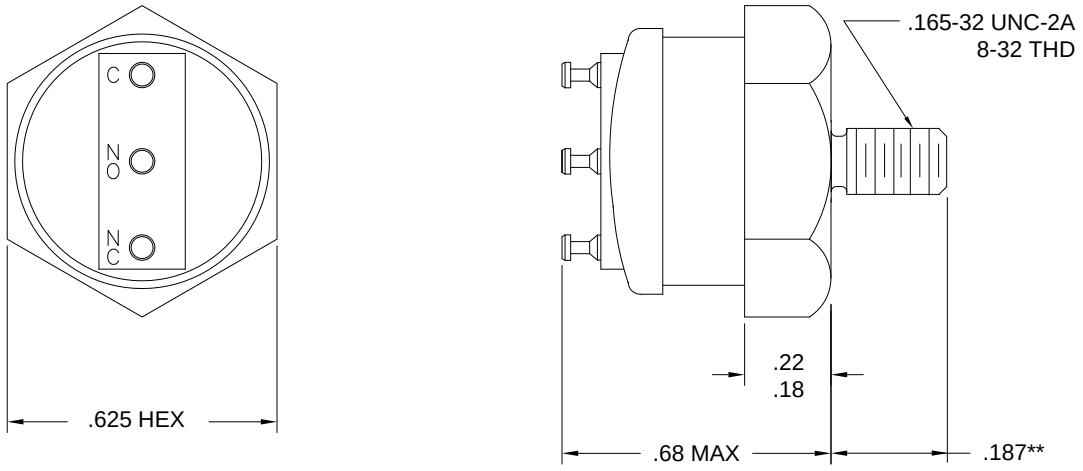


CONFIGURATION 3
WEIGHT: 12 grams maximum
** Other lengths available (consult factory)

FIGURE 1. Switches, thermostatic, (bimetallic), type I, environmentally sealed, SPDT - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:35Z
Check the source to verify that this is the current version before use.

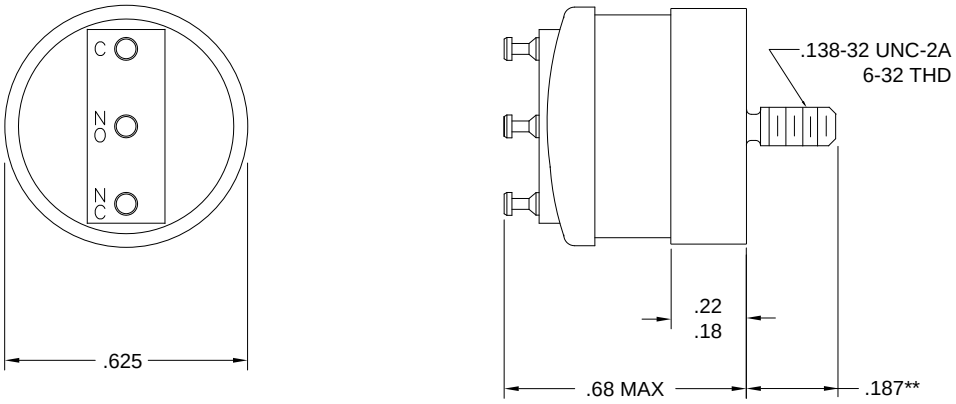


CONFIGURATION 4
WEIGHT: 11 grams maximum
** Other lengths available (consult factory)

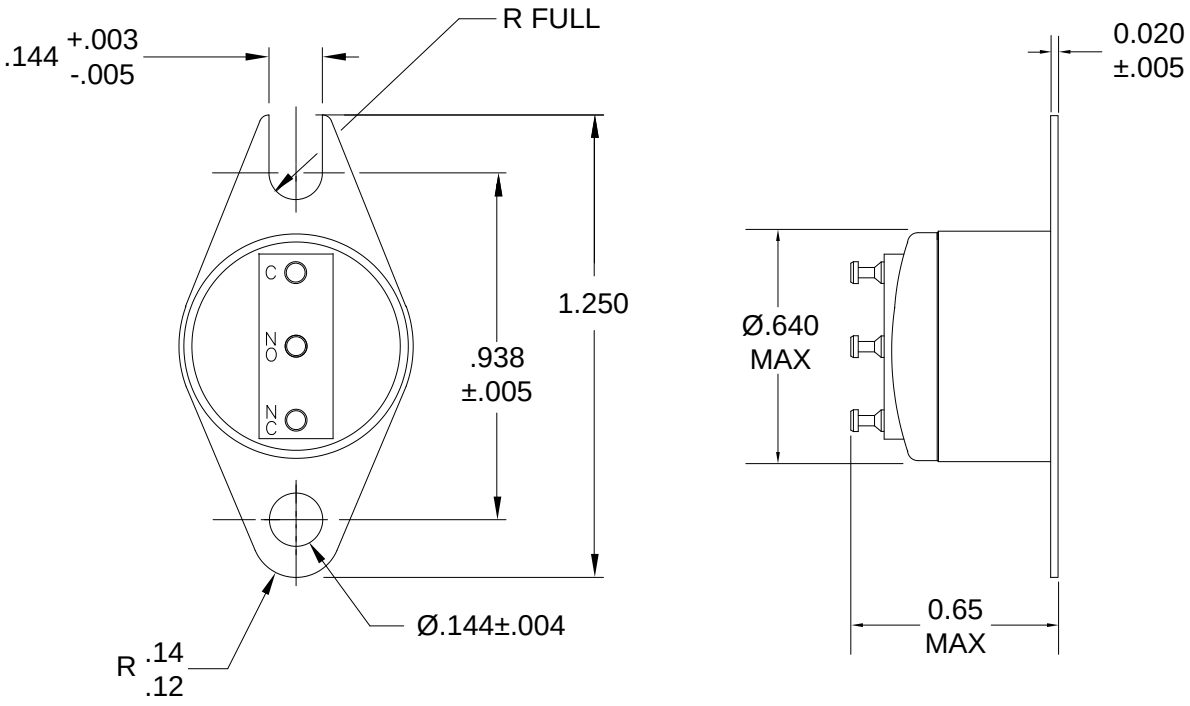


CONFIGURATION 5
WEIGHT: 11 grams maximum

FIGURE 1. Switches, thermostatic, (bimetallic), type I, environmentally sealed, SPDT - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:35Z
Check the source to verify that this is the current version before use.

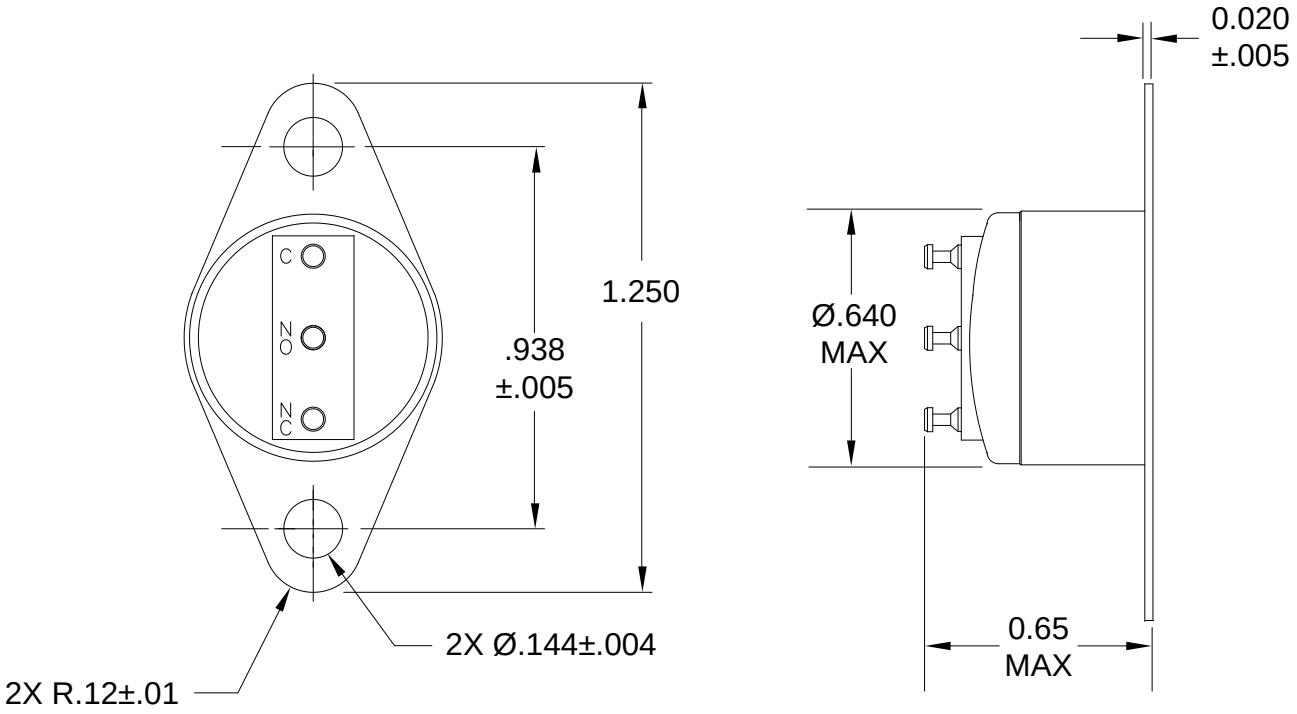


CONFIGURATION 6
WEIGHT: 11 grams maximum

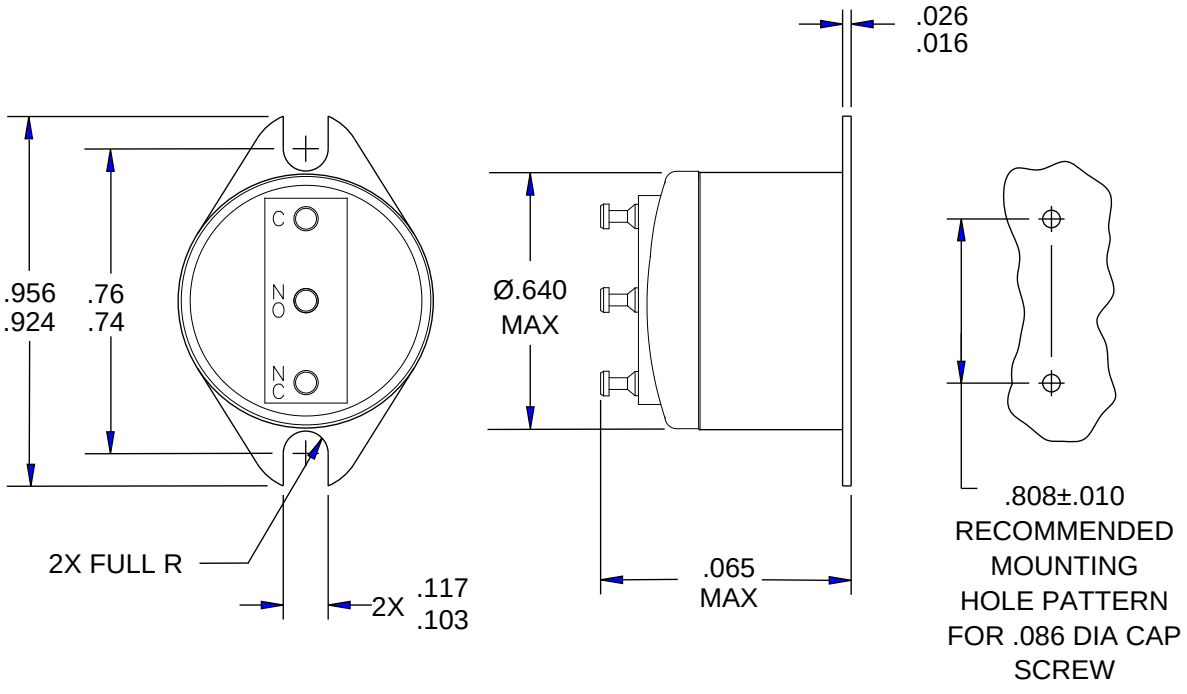


CONFIGURATION 7
WEIGHT: 10 grams maximum
FIGURE 1. Switches, thermostatic, (bimetallic), type I, environmentally sealed, SPDT - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:35Z
Check the source to verify that this is the current version before use.

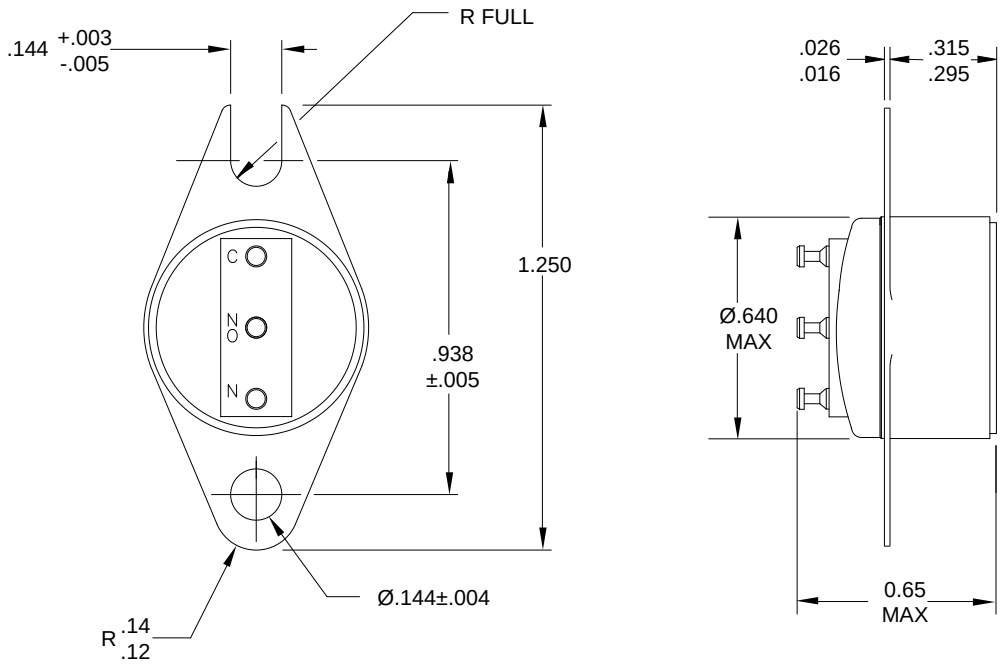


CONFIGURATION 8
WEIGHT: 11 grams maximum

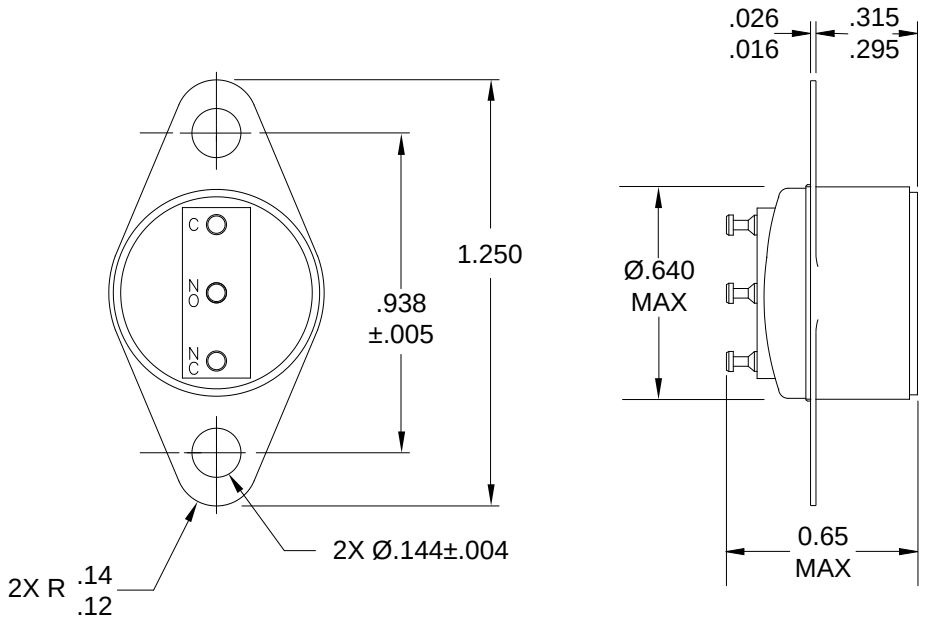

CONFIGURATION 9
WEIGHT: 11 grams maximum
** Other diameters available (consult factory)

FIGURE 1. Switches, thermostatic, (bimetallic), type I, environmentally sealed, SPDT - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:35Z
Check the source to verify that this is the current version before use.

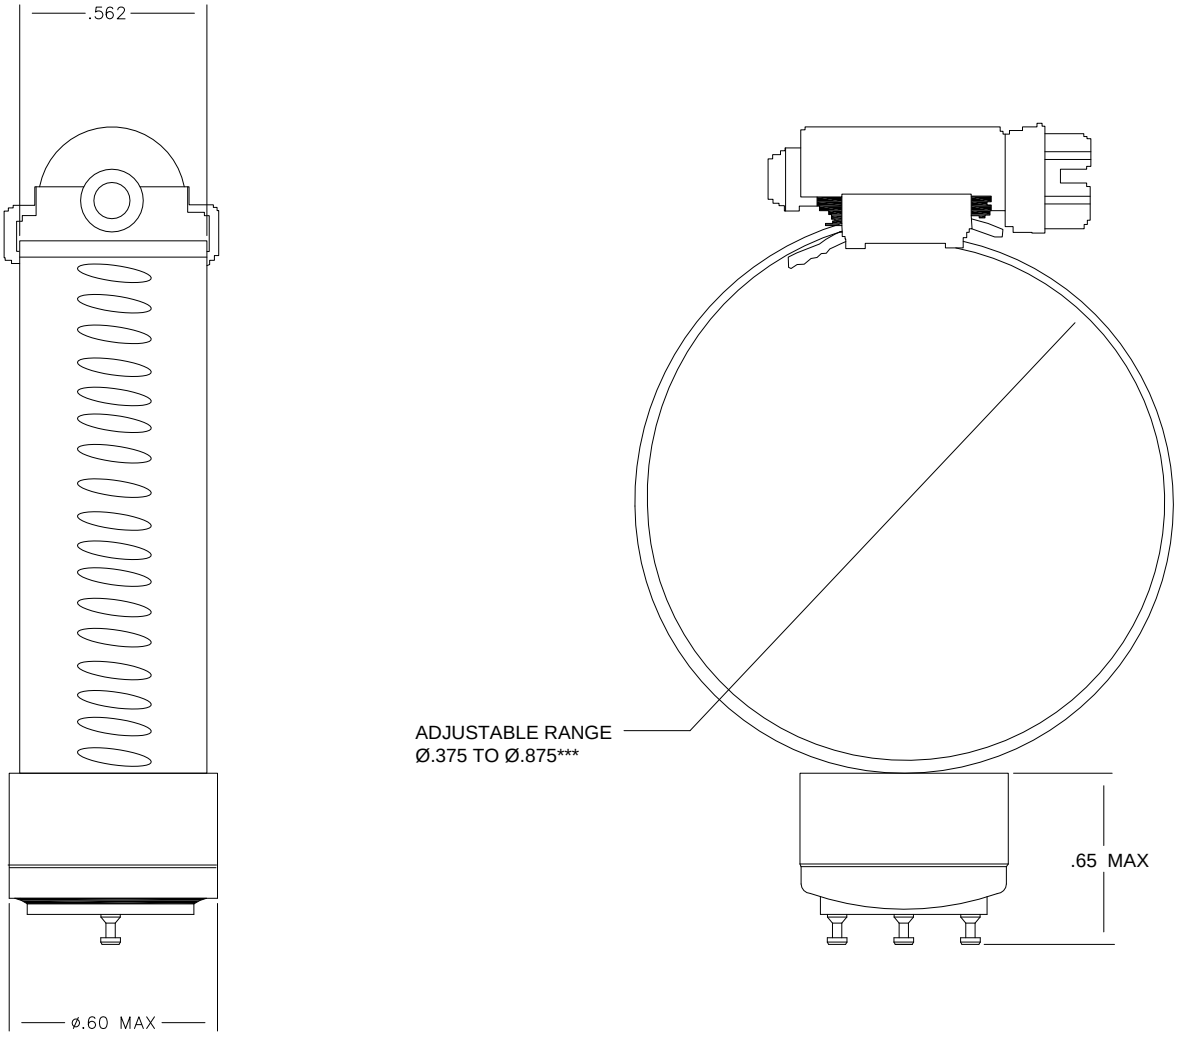

CONFIGURATION 10
WEIGHT: 35 grams maximum
*** Other ranges available. Consult Factory

FIGURE 1. Switches, thermostatic, (bimetallic), type I, environmentally sealed, SPDT - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:35Z
Check the source to verify that this is the current version before use.

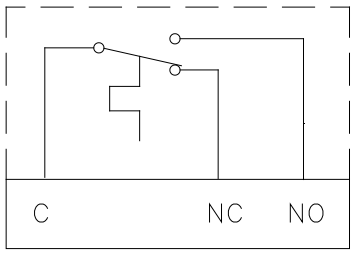


FIGURE 2. Schematic Diagram

Inches	mm	Inches	mm	Inches	mm	Inches	mm
0.003	0.08	0.103	2.62	0.295	7.49	0.64	16.26
0.004	0.10	0.117	2.97	0.315	8.00	0.65	16.51
0.005	0.13	0.12	3.05	0.374	9.50	0.74	18.80
0.01	0.25	0.138	3.51	0.375	9.53	0.76	19.30
0.016	0.41	0.14	3.56	0.5	12.70	0.808	20.52
0.02	0.51	0.144	3.66	0.562	14.27	0.875	22.23
0.026	0.66	0.165	4.19	0.57	14.48	0.924	23.47
0.04	1.02	0.18	4.57	0.59	14.99	0.938	23.83
0.06	1.52	0.187	4.75	0.6	15.24	0.956	24.28
0.062	1.57	0.19	4.83	0.62	15.75	1.25	31.75
0.07	1.78	0.22	5.59	0.625	15.88		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified tolerances are ±.020 (0.51 mm)
4. Exact shape of switch and terminals are optional provided dimensions specified are not exceeded.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See Figure 1 and Table I.

Tolerance: .XX = ±.03
.XXX = ±.010
Angle = ±5°

Temperature Setpoint Range: -45°F (-43°C) to +250°F (+121°C).

Standard setpoint tolerance: ±5°F (2.8°C)

Standard differential (deadband): 6 to 36°F (3.3 to 20°C)

Mounting: See Figure 1.

Weight: See Figure 1.

Schematic Diagram: See Figure 2 (Switch state shown is room temperature state of the switch determined by operating temperature and customer selection of SPST or SPDT functionality)

Hermetic enclosure: NA (switches are environmentally sealed)

Seal: NA

Moisture Resistance: NA

Salt Spray: NA (metal parts are of corrosion-resistant material or are plated to resist corrosion)


Dielectric withstanding voltage: 1500 VAC, 5 seconds, terminals to case.

Electrical ratings: See Table II.

Endurance: See Table II.

Marking: In accordance with MIL-PRF-24236.

Part or identifying Number (PIN): As shown in the following example:

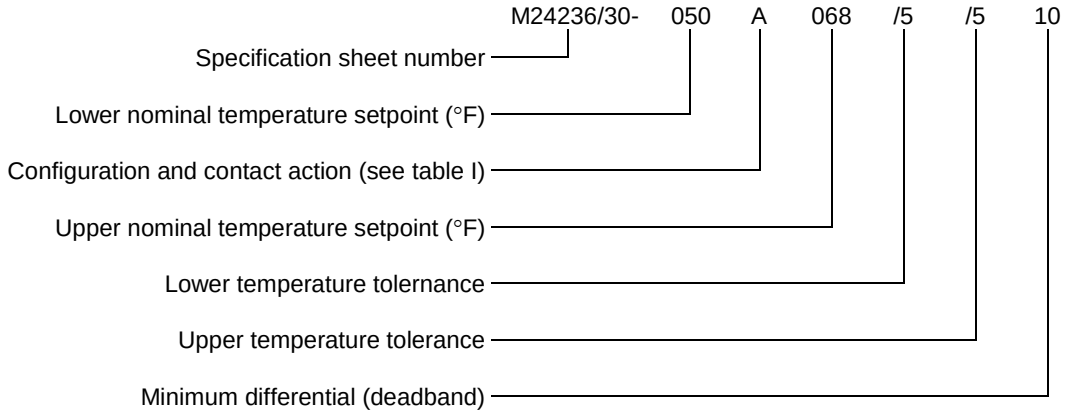

The above example identifies a switch of configuration 1 which opens on increasing temperature at 68 ± 5°F, and closes on decreasing temperature at 50 ± 5°F with 10°F minimum differential.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:35Z
Check the source to verify that this is the current version before use.

TABLE I. Configuration and contact action.

	Configuration										Contact action
	1	2	3	4	5	6	7	8	9	10	
Code –	A	C	E	G	J	L	N	Q	S	U	Open on increasing temperature
Code –	B	D	F	H	K	M	P	R	T	V	Close on increasing temperature

TABLE II. Electrical ratings.

	Altitude				Life cycles
	Sea level			50,000 feet	
	55VDC	28 VDC	115 V, 60 Hz	28 VDC	
	(amperes)	(amperes)	(amperes)	(amperes)	
Resistive	3.0	5.0	5.0	4.0	100,000
Inductive	-	4.0	5.0	2.5	100,000
Lamp	-	2.5	2.0	2.5	10,000

TABLE III. Extent of qualification.

Configuration	Number of samples required	Tests	Qualifies
1	All in accordance with Qualification table of MIL-PRF-24236	Complete in accordance with qualification inspection of MIL-PRF-24236. Endurance 28VDC, 5.0 ampere, 100,000 cycles. Seal - NA Moisture Resistance - NA Salt Spray - NA	All

Referenced documents: MIL-PRF-24236

The margins of this specification are marked with vertical lines to indicate where modifications from this revision were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Preparing Activity:
DLA – CC

(Project 5930-2012-034)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:35Z
Check the source to verify that this is the current version before use.