
MILITARY SPECIFICATION SHEET

SWITCHES, THERMOSTATIC, (BIMETALLIC), TYPE I, HERMETICALLY SEALED, SINGLE POLE, SINGLE THROW (SPST) AND SINGLE POLE DOUBLE THROW (SPDT), MANUAL RESET AND AUTOMATIC RESET.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-S-24236.

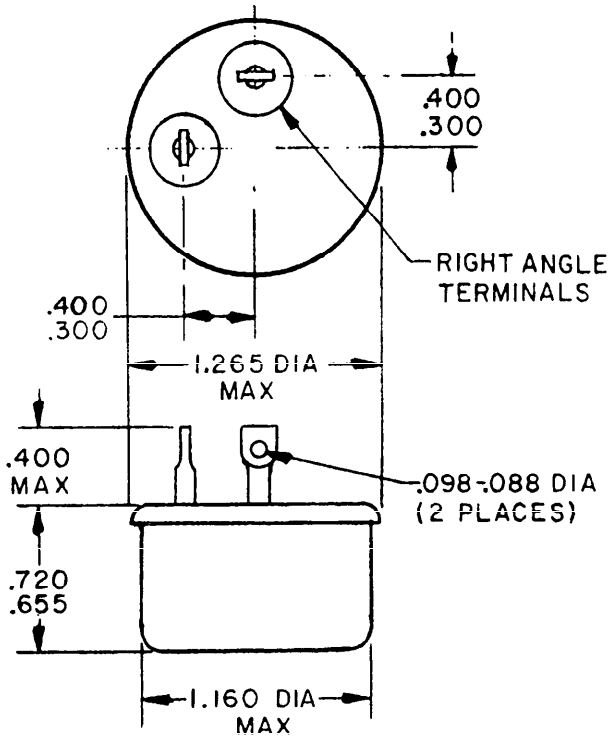


CONFIGURATION A (SINGLE POLE, SINGLE THROW)

FIGURE 1. Switches, thermostatic, (bimetallic), type I, hermetically sealed.

FSC 5930


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

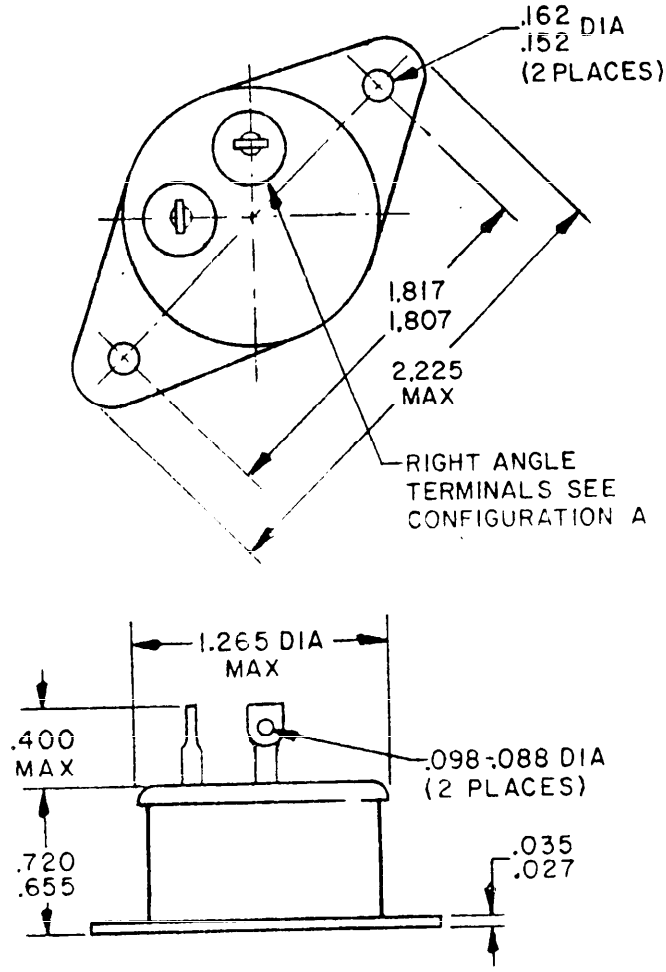


CONFIGURATION B (SINGLE POLE, SINGLE THROW)


FIGURE 1. Switches, thermostatic, (bimetallic), type I, hermetically sealed - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

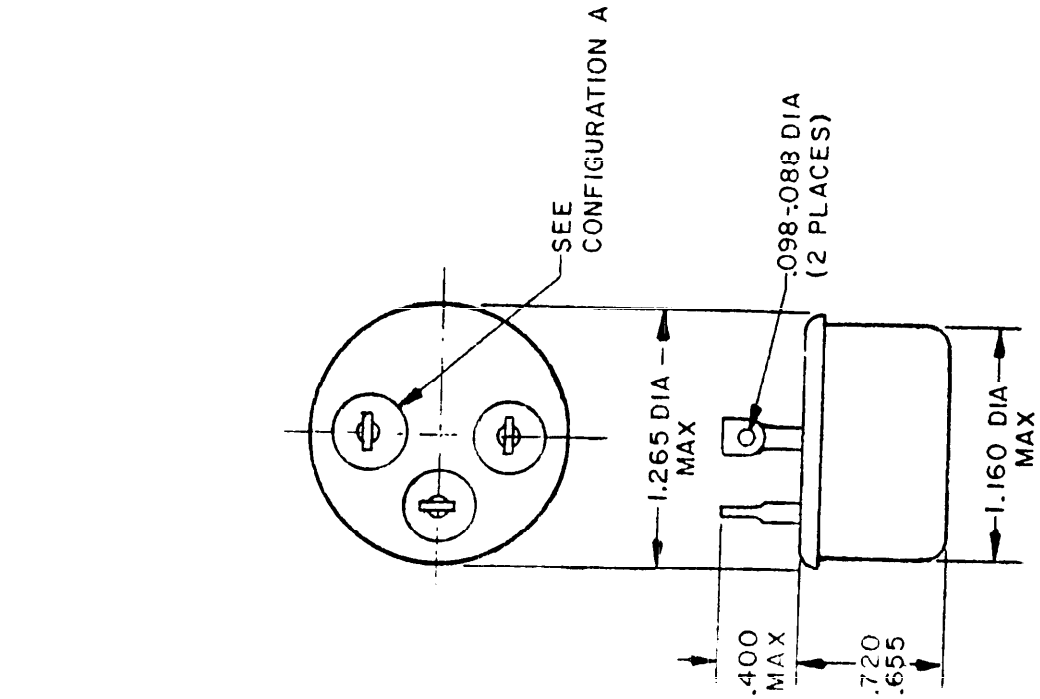

CONFIGURATION D (SINGLE POLE, DOUBLE THROW)

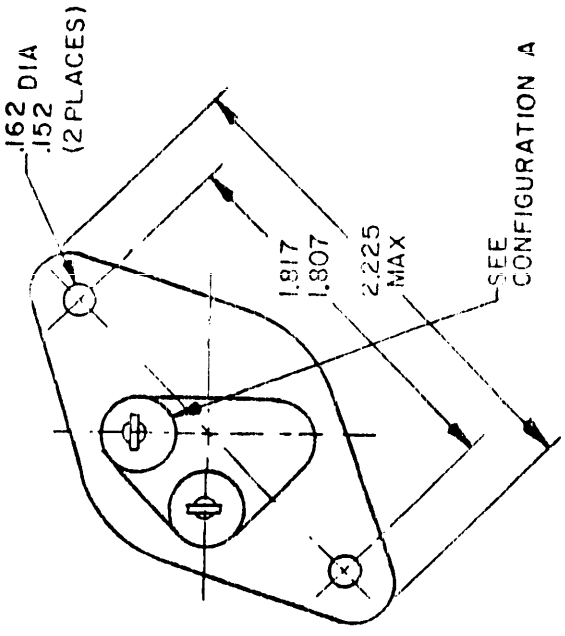

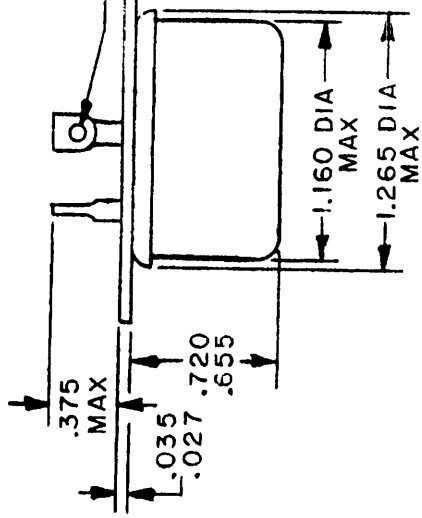

CONFIGURATION C (SINGLE POLE, SINGLE THROW)

FIGURE 1. Switches, thermostatic, (bimetallic), type I, hermetically sealed - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:34Z
Check the source to verify that this is the current version before use.


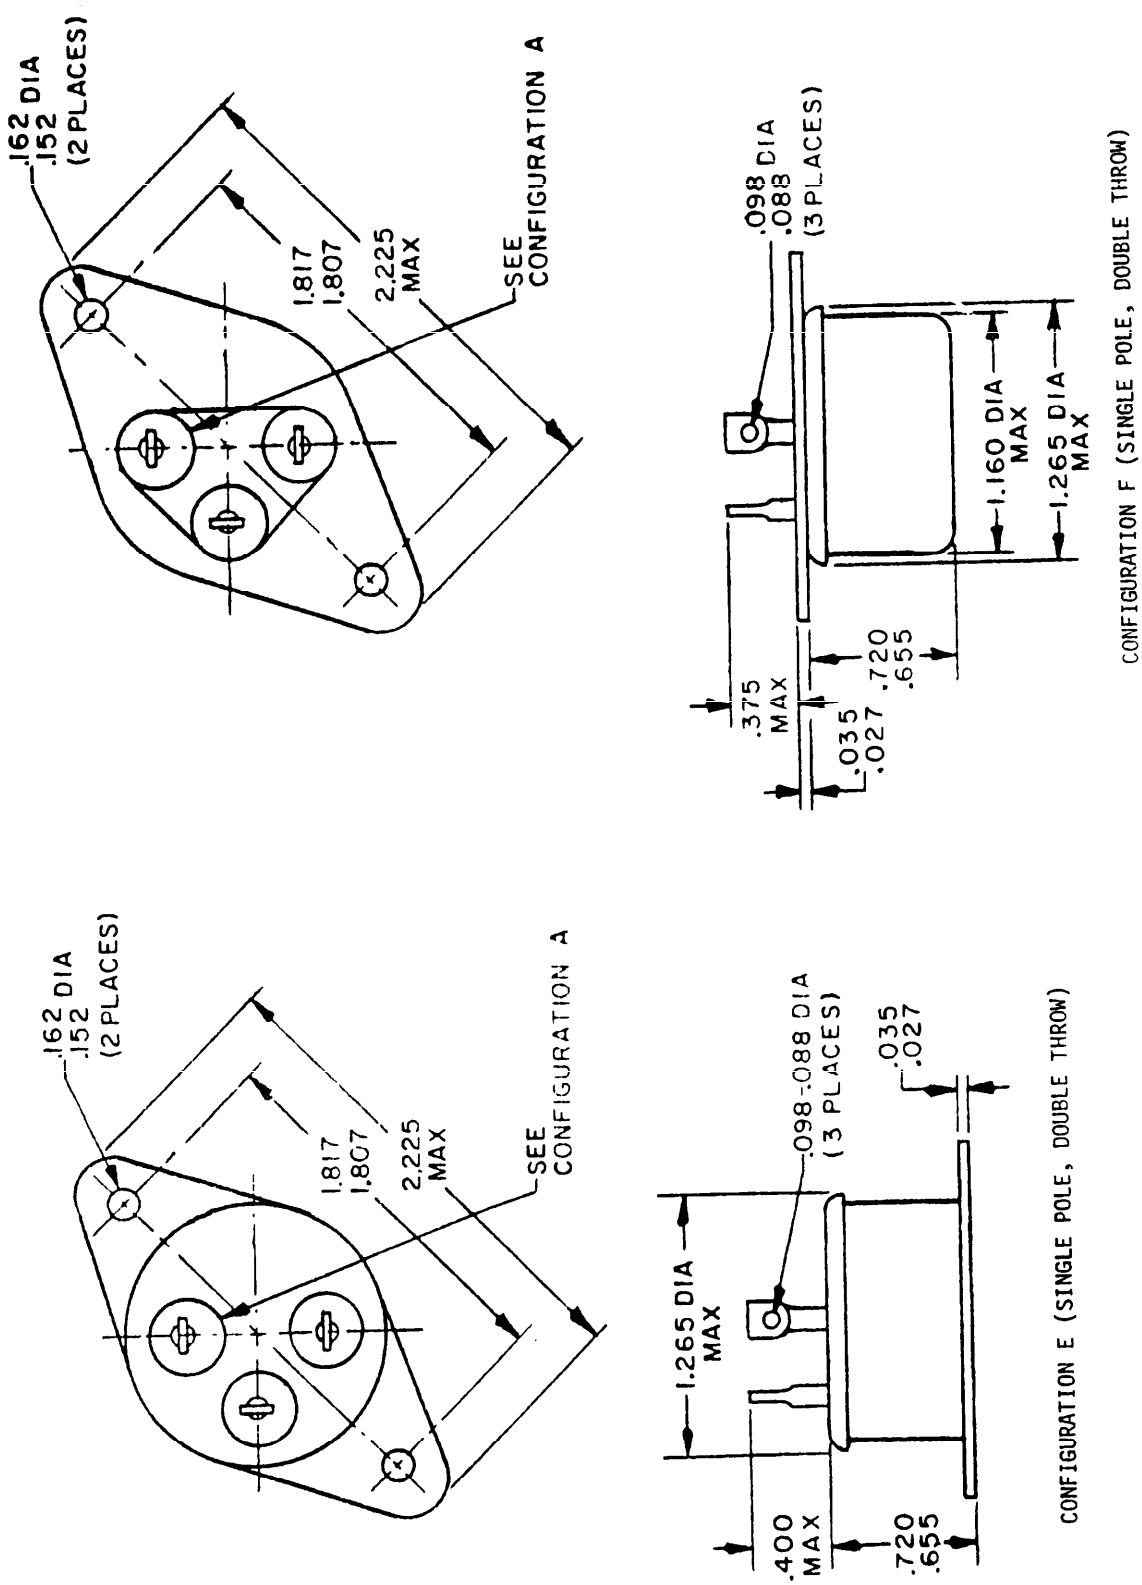


FIGURE 1. Switches, thermostatic, (bimetallic), type I, hermetically sealed - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:34Z
Check the source to verify that this is the current version before use.

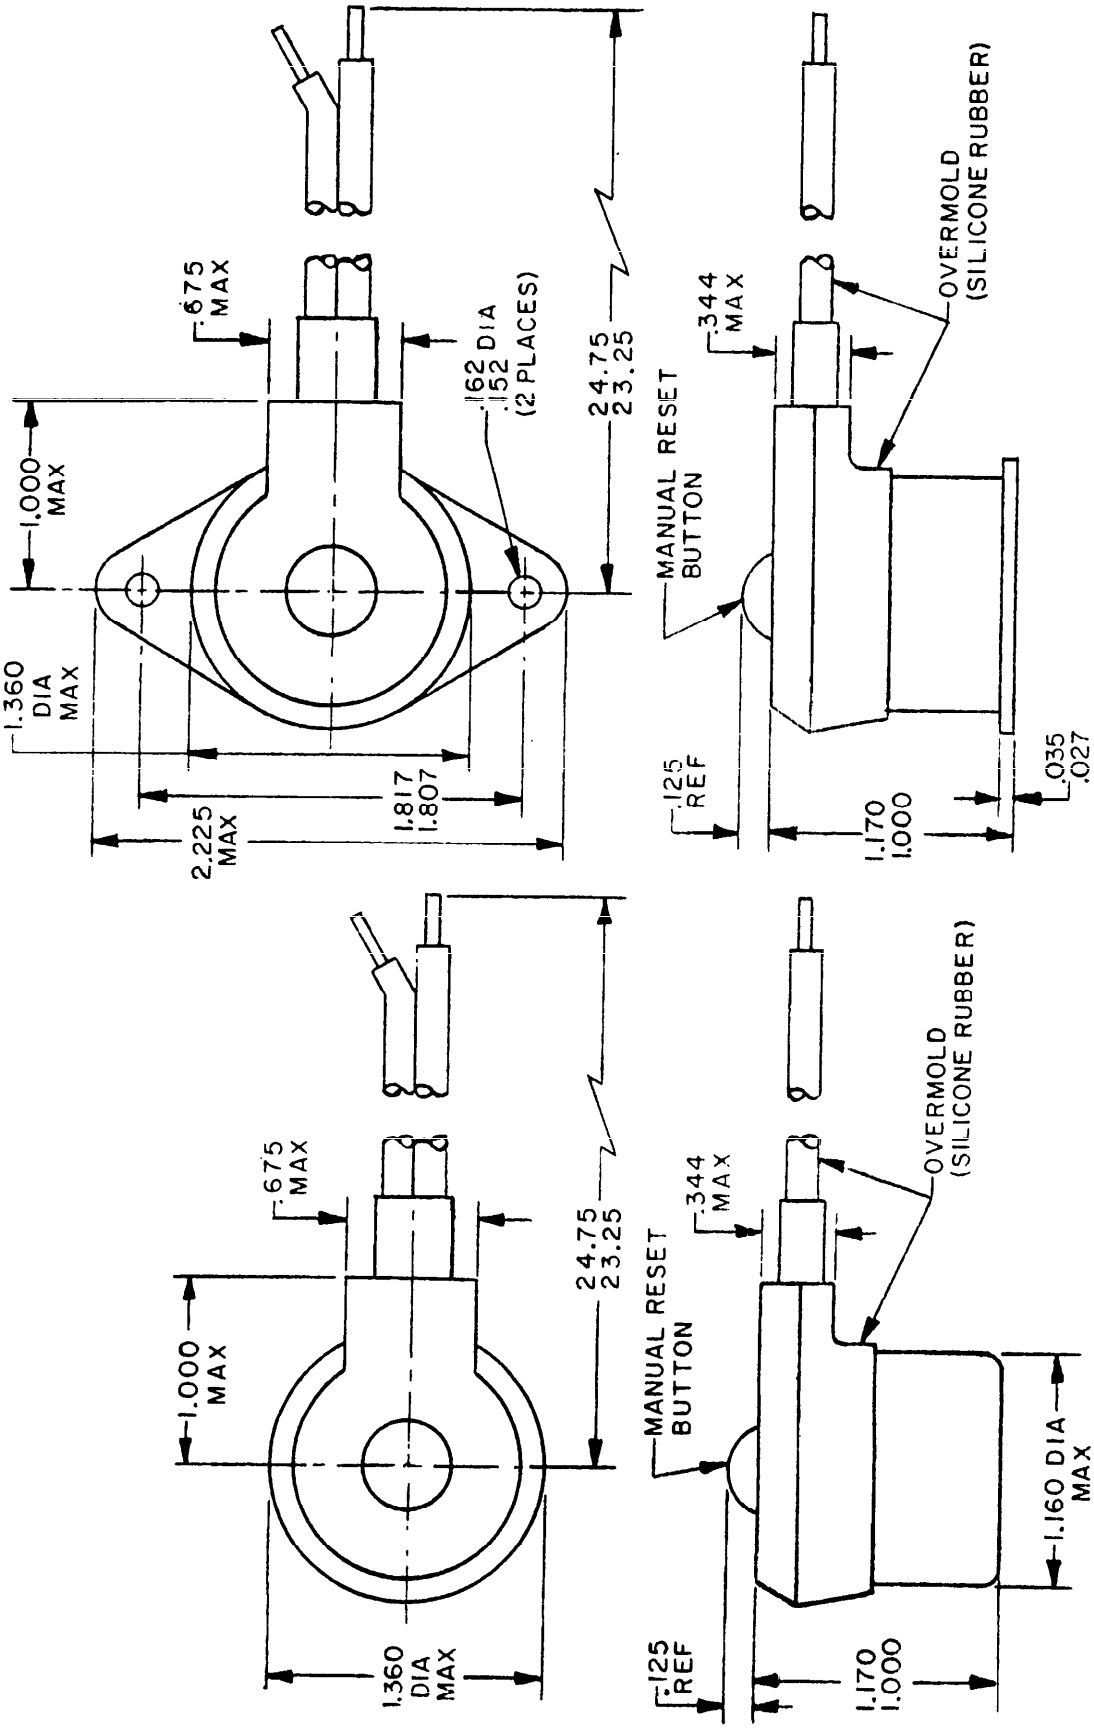


CONFIGURATION H (SINGLE POLE, SINGLE THROW, MANUAL RESET)

CONFIGURATION G (SINGLE POLE, SINGLE THROW, MANUAL RESET)

FIGURE 1. Switches, thermostatic, (bimetallic), type I, hermetically sealed - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

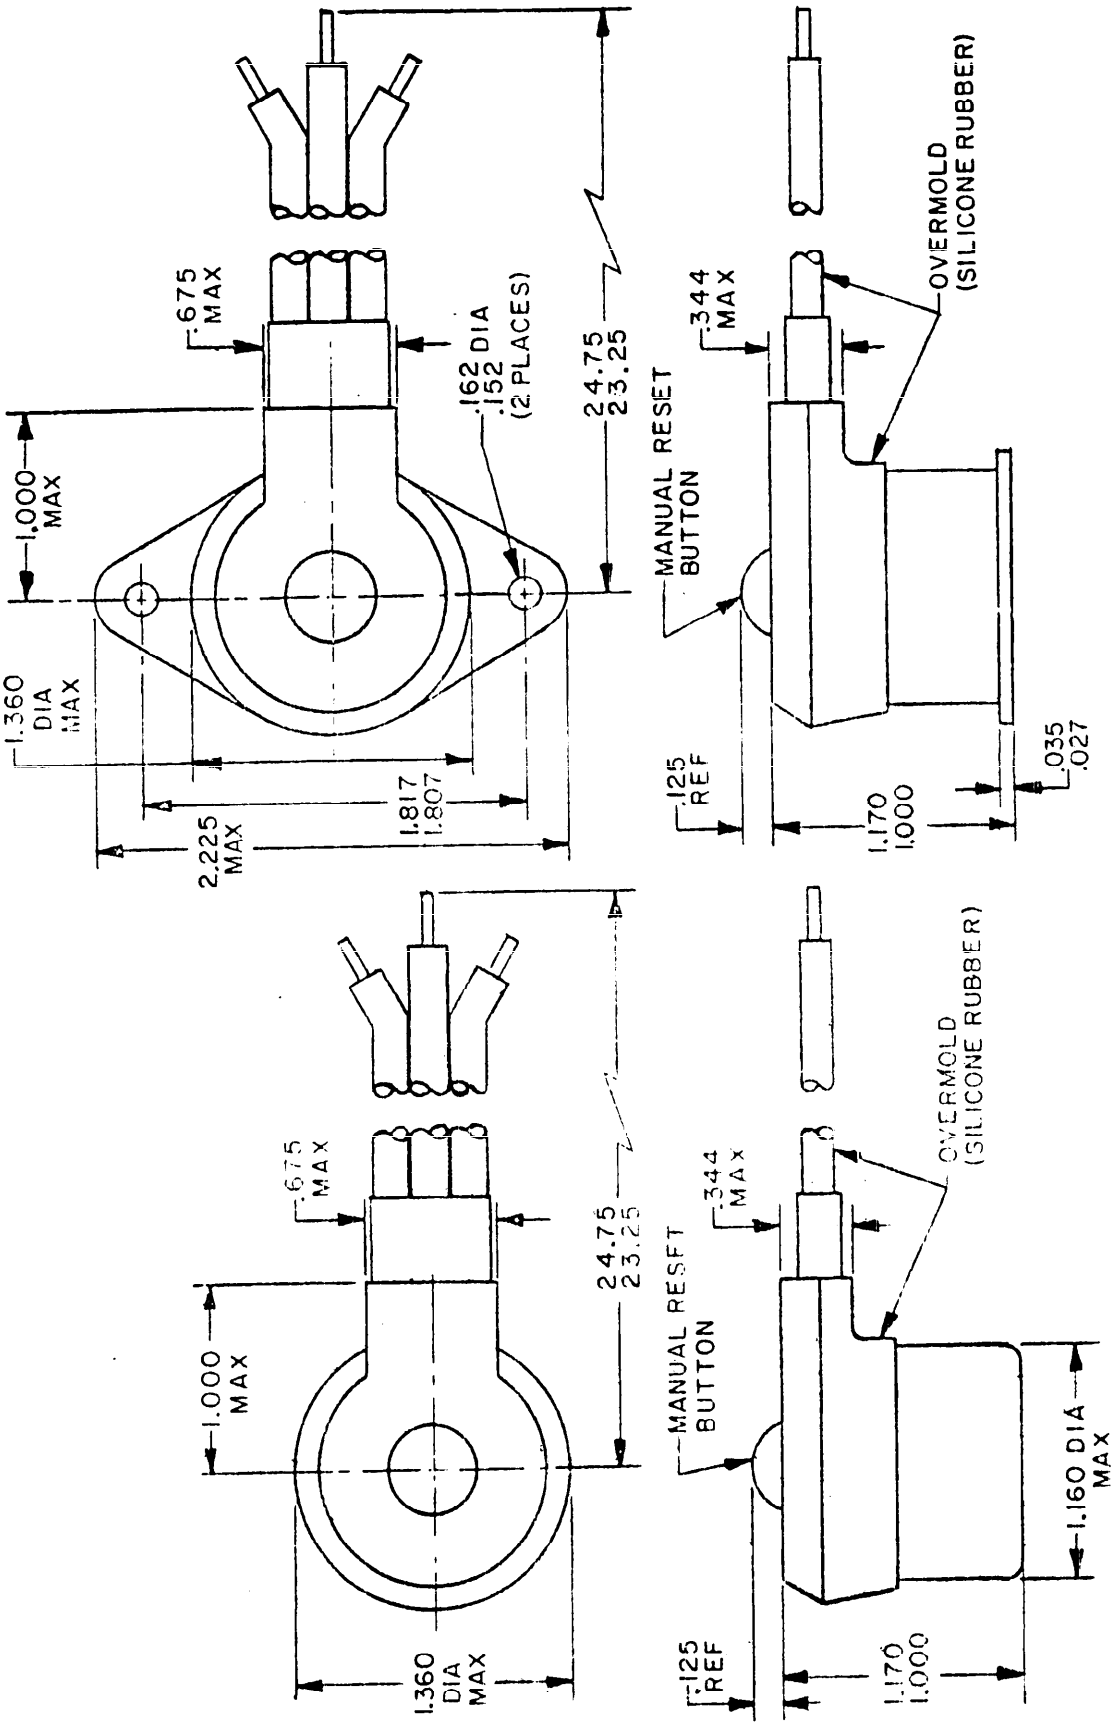

CONFIGURATION K (SINGLE POLE, DOUBLE THROW, MANUAL RESET)

CONFIGURATION J (SINGLE POLE, DOUBLE THROW, MANUAL RESET)

FIGURE 1. Switches, thermostatic, (bimetallic), type I, hermetically sealed - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:34Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
.027	.69	.675	17.14
.035	.89	.720	18.29
.088	2.23	1.000	25.40
.098	2.49	1.160	29.46
.125	3.18	1.170	29.72
.152	3.86	1.265	32.13
.162	4.11	1.360	34.54
.300	7.62	1.807	45.90
.344	8.74	1.817	46.15
.375	9.52	2.225	56.51
.400	10.16	23.25	590.5
.655	16.64	24.75	628.6

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Switches, thermostatic, (bimetallic), type I, hermetically sealed - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and tables I and II.

Operating temperature range: -65°F to 450°F except configurations G, H, J, and K which are limited to 350°F.

Class: 3, except 3G.

Weight: All except configurations G, H, J, and K -21 grams automatic volume expansion (ave). Configurations G, H, J, and K -56 grams ave.

Operating temperature and tolerance: See tables III and IV.


Electrical ratings: 10 amperes resistive at 115 V ac.
10 amperes resistive at 30 V dc.

Endurance test: 100,000 cycles.

QUALIFICATION: See table V.

MILITARY PART NUMBER: The part number shall consist of the prefix "M24236/28" and either a three-letter code or five-letter code.

EXAMPLE:

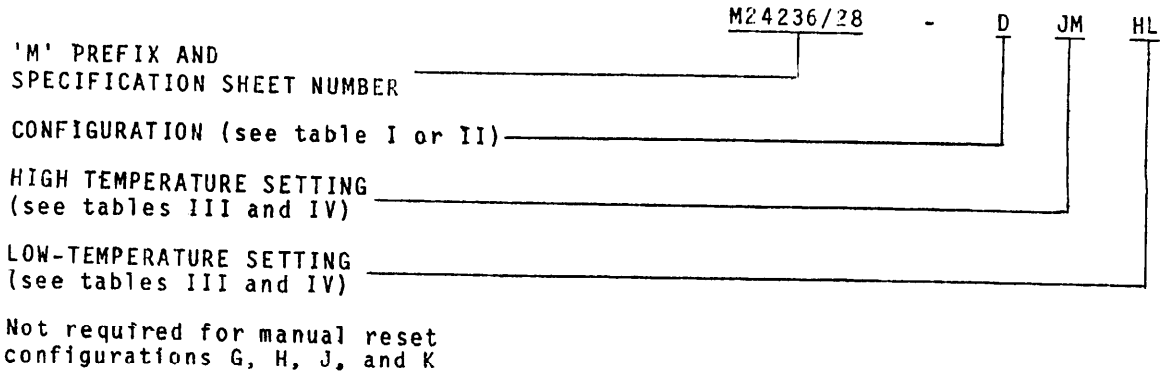

The above example is a single-pole, single-throw thermostatic switch that is configuration B and opens (deactuates) as the temperature increases. Its set points are that it deactuates at 120 ±8°F (125- 5 ±8) and actuates at 90 ±8°F (100 - 10 ±8).

Source: https://assist.dla.mil -- Downloaded: 2026l0-19T20:34Z
Check the source to verify that this is the currentversion before use.


TABLE I. Configuration and contact action (single-pole and single-throw).

	Single-pole, single-throw configuration					Contact action
	A	B	C	G	H	
Code	A	C	E	G	J	Close on temperature rise
	B	D	F	H	K	Open on temperature rise

TABLE II. Configuration and contact action (single-pole and double-throw)

	Single-pole, double-throw configuration					Contact action
	D	E	F	J	K	
Code	L	M	N	P	Q	See wiring diagram

WIRING DIAGRAM (SPDT ONLY)

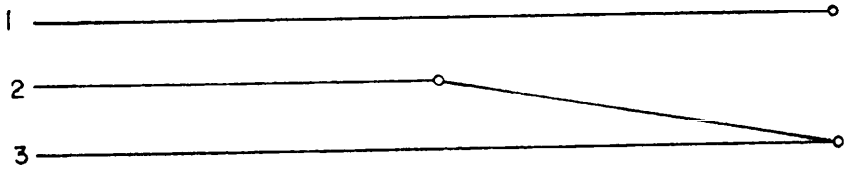

Terminals 1 and 2 close and terminals 2 and 3 open at the operating temperature that has the largest tolerance.

If low and high setting tolerances are equal, then terminals 1 and 2 close and terminals 2 and 3 open at the high temperature setting.

TABLE III. Temperature setting to the nearest 25°F.

Code	Temperature (°F)	Code	Temperature (°F)
A	-75	M	200
B	-50	N	225
C	-25	P	250
D	0	Q	275
E	25	R	300
F	50	S	325
G	75	T	350
H	100	U	375
J	125	V	400
K	150	W	425
L	175	X	450

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.

TABLE IV. Temperature setting to the nearest 5°F.

	Unit					Tolerance
	-10	-5	0	+5	+10	
Code	A	B	C	D	E	±5°F
	F	G	H	J	K	±7°F
	L	M	N	P	Q	±8°F
	R	S	T	U	V	±10°F
	W	X	Y	Z	1	±12°F
	2	3	4	5	6	±15°F

The proper selection of temperature setting, tolerances, and configuration must be determined through the manufacturer as all combinations are not available.

TABLE V. Extent of qualification.

Configuration	Number of samples required	Tests	Qualifies
B	All per qualification table of MIL-S-24236	Complete per qualification inspection of MIL-S-24236	All
A, C, D, E, F, G, H, J, and K	2 Each	Visual and mechanical	

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS
Air Force - 17, 99
DLA - ES

User activities:
Army - AT, AV
Navy - MC, OS
Air Force - 11, 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5930-1157)

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:34Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:34Z
Check the source to verify that this is the current version before use.